


NEW

2025.10

B210E-1


FSF / FSF-P CHIPBREAKER

IDEAL CHIPBREAKER FOR SMALL DEPTHS OF CUT
AND FINISHING OPERATIONS

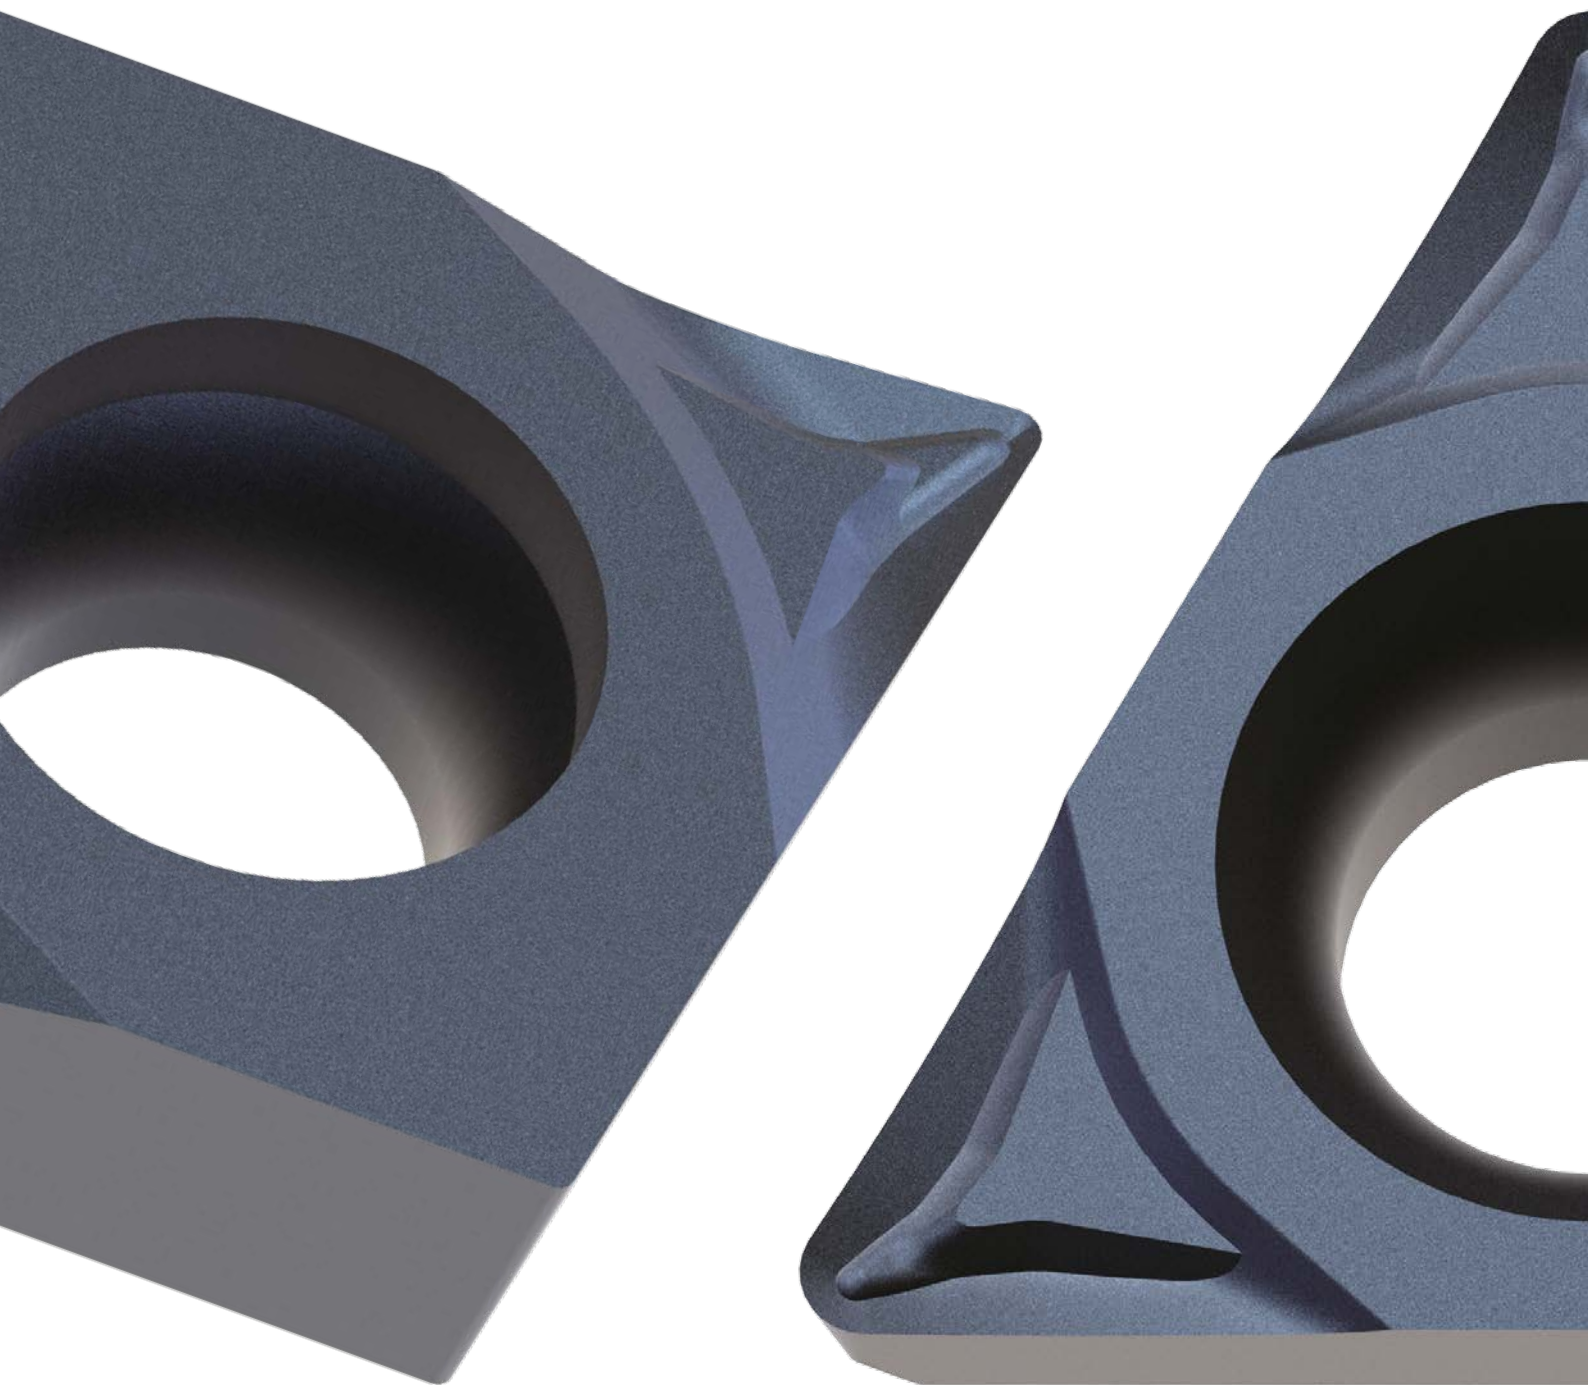

FSF / FSF-P CHIPBREAKER

CHIPBREAKER FOR SMALL DEPTHS OF CUT

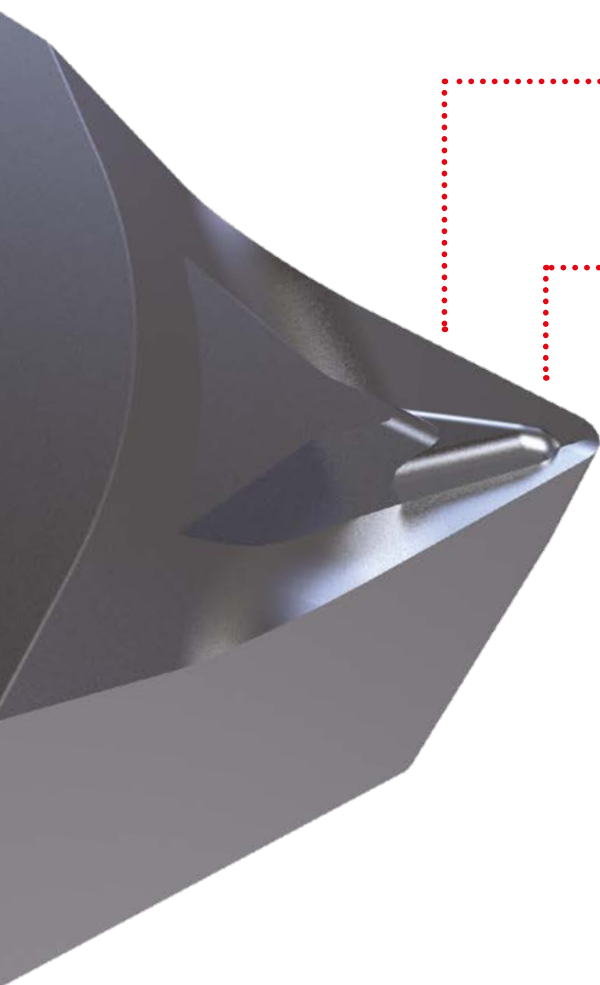

SHARP CUTTING EDGE

The sharp 25° rake angle provides a sharp cutting edge and a beautifully finished surface.



LOW CUTTING RESISTANCE

Low cutting resistance design with gentle chipbreaker protrusion.

MULTI-STAGE CHIPBREAKER

Responds to fluctuations in depth of cut.



APPLICATION RANGE

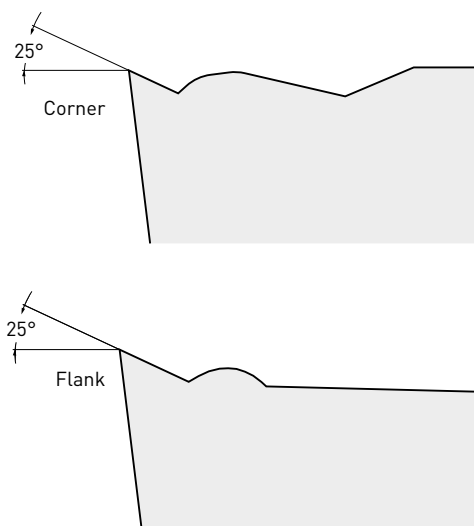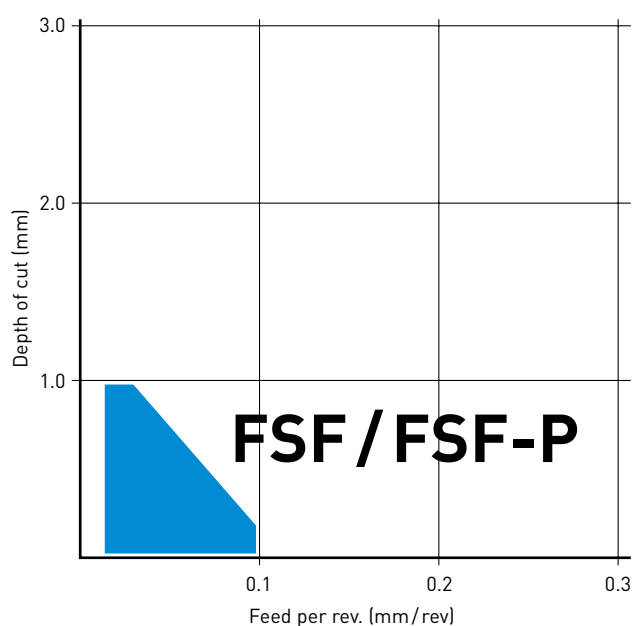

CCGT

7° POSITIVE INSERTS (WITH HOLE)

G Class



Order number	 	MP9025	MS7025	MS9025	VP30RT	HT110	IC	S	RE	D1
CCGT03S101M-FSF	F	●					3.97	1.39	0.1	2.0
CCGT03S102M-FSF	F	●					3.97	1.39	0.2	2.0
CCGT04T001M-FSF	F	●					4.76	1.79	0.1	2.4
CCGT04T002M-FSF	F	●					4.76	1.79	0.2	2.4
CCGT060201M-FSF	F	●					6.35	2.38	0.1	2.8
CCGT060202M-FSF	F	●					6.35	2.38	0.2	2.8
CCGT060204M-FSF	F	●					6.35	2.38	0.4	2.8
CCGT03S101M-FSF-P	F		●	●			3.97	1.39	0.1	2.0
CCGT03S102M-FSF-P	F		●	●			3.97	1.39	0.2	2.0
CCGT04T001M-FSF-P	F		●	●			4.76	1.79	0.1	2.4
CCGT04T002M-FSF-P	F		●	●			4.76	1.79	0.2	2.4
CCGT0602V5M-FSF-P	F		●		●		6.35	2.38	0.05	2.8
CCGT060201M-FSF-P	F		●	●	●		6.35	2.38	0.1	2.8
CCGT060202M-FSF-P	F		●	●	●		6.35	2.38	0.2	2.8
CCGT060204M-FSF-P	F		●	●	●		6.35	2.38	0.4	2.8
CCGT09T3V5M-FSF-P	F		●		●		9.525	3.97	0.05	4.4
CCGT09T301M-FSF-P	F		●	●	●		9.525	3.97	0.1	4.4
CCGT09T302M-FSF-P	F		●		●		9.525	3.97	0.2	4.4
CCGT09T304M-FSF-P	F		●		●		9.525	3.97	0.4	4.4



1/1



DCGT

7° POSITIVE INSERTS (WITH HOLE)

G Class



Order number		MP9025	MS7025	MS9025	VP30RT	HT110	IC	S	RE	D1
DCGT070201M-FSF	F	●					6.35	2.38	0.1	2.8
DCGT070202M-FSF	F	●					6.35	2.38	0.2	2.8
DCGT11T301M-FSF	F	●					9.525	3.97	0.1	4.4
DCGT11T302M-FSF	F	●					9.525	3.97	0.2	4.4
DCGT0702V5M-FSF-P	F		●		●		6.35	2.38	0.05	2.8
DCGT070201M-FSF-P	F		●	●	●		6.35	2.38	0.1	2.8
DCGT070202M-FSF-P	F		●	●	●		6.35	2.38	0.2	2.8
DCGT11T3V5M-FSF-P	F		●		●		9.525	3.97	0.05	4.4
DCGT11T301M-FSF-P	F		●	●	●		9.525	3.97	0.1	4.4
DCGT11T302M-FSF-P	F		●	●	●		9.525	3.97	0.2	4.4
DCGT11T304M-FSF-P	F		●		●		9.525	3.97	0.4	4.4



1/1



TBGT, TPGH

5°, 11° POSITIVE INSERTS (WITH HOLE)

G Class

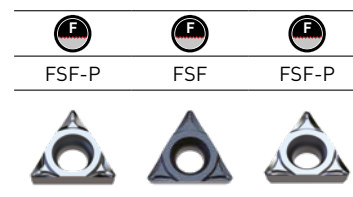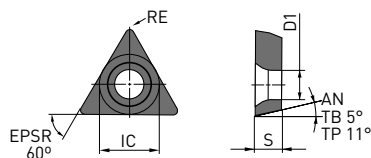

Order number		MP9025	MS7025	MS9025	VP30RT	HT110	IC	S	RE	D1
TBGT060101M-FSF-P	F		●	●	●		3.97	1.59	0.1	2.3
TBGT060102M-FSF-P	F		●		●		3.97	1.59	0.2	2.3
TPGH090201M-FSF	F	●					5.56	2.38	0.1	2.9
TPGH090202M-FSF	F	●					5.56	2.38	0.2	2.9
TPGH090204M-FSF	F	●					5.56	2.38	0.4	2.9
TPGH080201M-FSF-P	F		●	●	●		4.76	2.38	0.1	2.4
TPGH080202M-FSF-P	F		●		●		4.76	2.38	0.2	2.4
TPGH090201M-FSF-P	F		●	●	●		5.56	2.38	0.1	2.9
TPGH090202M-FSF-P	F		●	●	●		5.56	2.38	0.2	2.9
TPGH090204M-FSF-P	F		●	●	●		5.56	2.38	0.4	2.9


1/1



TPGB

11° POSITIVE INSERTS (WITHOUT HOLE)

G Class

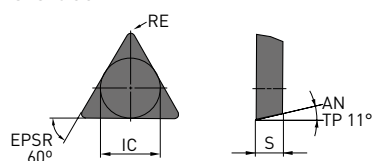

Strong cutting
edge
Flat Top



Order number		MP9025	MS7025	MS9025	VP30RT	HT110	IC	S	RE	D1
TPGB110201	M					●	6.35	2.38	0.1	—
TPGB110202	M					●	6.35	2.38	0.2	—
TPGB110204	M					●	6.35	2.38	0.4	—
TPGB160304	M					●	9.525	3.18	0.4	—
TPGB160308	M					●	9.525	3.18	0.8	—
TPGB080202	M					●	4.76	2.38	0.2	—
TPGB080204	M					●	4.76	2.38	0.4	—
TPGB080208	M					●	4.76	2.38	0.8	—
TPGB090202	M					●	5.56	2.38	0.2	—
TPGB090204	M					●	5.56	2.38	0.4	—
TPGB1102V5	M					●	6.35	2.38	0.05	—
TPGN090202	—					●	5.56	2.38	0.2	—
TPGN090204	—					●	5.56	2.38	0.4	—
TPGN090208	—					●	5.56	2.38	0.8	—

1/1



● : Inventory maintained. ★ : Inventory maintained in Japan.



VCGT, VPGT

7°, 11° POSITIVE INSERTS (WITH HOLE)

G Class

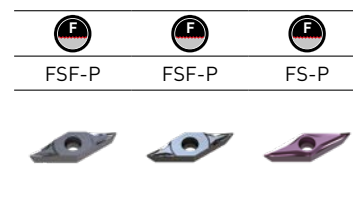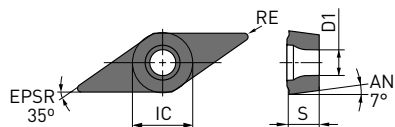

Order number	 	MP9025	MS7025	MS9025	VP30RT	HT110	IC	S	RE	D1
VCGT110301M-FSF-P	F		●	●	●		6.35	3.18	0.1	2.8
VCGT110302M-FSF-P	F		●		●		6.35	3.18	0.2	2.8
VCGT110304M-FSF-P	F		●		●		6.35	3.18	0.4	2.8
VPGT110301M-FSF-P	F		●	●	●		6.35	3.18	0.1	2.9
VPGT110302M-FSF-P	F		●		●		6.35	3.18	0.2	2.9
VPGT110304M-FSF-P	F		●		●		6.35	3.18	0.4	2.9
VPGT110301M-FS-P	F		●		●		6.35	3.18	0.1	2.9
VPGT110302M-FS-P	F		●		●		6.35	3.18	0.2	2.9


1/1



WCGT

7° POSITIVE INSERTS (WITH HOLE)

G Class



Order number	 	MP9025	MS7025	MS9025	VP30RT	HT110	IC	S	RE	D1
WCGT020101M-FSF-P	F		●	●	●		3.97	1.59	0.1	2.3
WCGT020102M-FSF-P	F		●	●	●		3.97	1.59	0.2	2.3
WCGTL30201M-FSF-P	F		●	●	●		4.76	2.38	0.1	2.3
WCGTL30202M-FSF-P	F		●	●	●		4.76	2.38	0.2	2.3
WCGT040201M-FSF-P	F		●	●	●		6.35	2.38	0.1	2.8
WCGT040202M-FSF-P	F		●	●	●		6.35	2.38	0.2	2.8
WCGT06T301M-FSF-P	F			●			9.525	3.97	0.1	4.4
WCGT06T302M-FSF-P	F		●	●	●		9.525	3.97	0.2	4.4
WCGT06T304M-FSF-P	F		●		●		9.525	3.97	0.4	4.4

1/1



FSF / FSF-P CHIPBREAKER

RECOMMENDED CUTTING CONDITIONS

CUTTING SPEED

Material	Properties	 	Cutting condition	MP9025 Vc	MS7025 Vc	MS9025 Vc	VP30RT Vc	HT110 Vc
P	Soft magnetic iron, Mild steel	≤180 HB	F	 —	100 – 300	—	—	—
				—	—	—	155 – 190	—
	Carbon steel, Alloy steel	180–280 HB	F	 —	40 – 130	—	—	—
				—	—	—	115 – 140	—
	Carbon steel, Alloy steel	280–350 HB	F		—	—	80 – 100	—
M	Austenitic stainless steel	≤200 HB	F	 —	40 – 100	60 – 150	—	—
				—	—	—	50 – 90	—
	Ferritic and martensitic stainless steel	≤200 HB	F	 —	40 – 100	—	—	—
				—	—	—	50 – 90	—
	Austenitic, Ferritic and martensitic stainless steel	>200 HB	F		—	—	40 – 75	—
	Electromagnetic stainless steel	230 HBW	F		—	40 – 160	50 – 180	—
	Duplex stainless steel	≤280 HB	F		—	—	35 – 60	—
	Precipitation hardening stainless steel	<450 HB	F		70 – 85	40 – 80	50 – 100	—
K	Grey cast iron	≤350 MPa	M	 	—	—	—	90 – 125
	Ductile cast iron	≤450 MPa	M	 	—	—	—	70 – 100
	Ductile cast iron	≤800 MPa	M	 	—	—	—	60 – 90
N	Aluminium alloys	—	M	 	—	—	—	300 – 700
S	Heat resistant alloys	—	F		—	40 – 140	—	—
				25 – 40	—	—	—	—


1/1

Chipbreaker	f (mm/rev)	ap (mm)
FSF, FSF-P	0.02 – 0.1	0.02 – 1.0
FS-P	0.04 – 0.2	0.2 – 0.9
Standard	0.08 – 0.3	0.3 – 2.0
Flat Top	0.08 – 0.3	0.3 – 2.0

APPLICATION EXAMPLES

EXTERNAL TURNING

Workpiece material	DIN 1.4301 (X5CrNi18-10)
Insert	DCGT11T301M-FSF-P
Grade	MS9025
Vc (m/min)	120
f (mm/rev)	0.02
ap (mm)	0.1
Cutting mode	Wet cutting (Oil)
Result	Chipping at the cutting edge was suppressed and chip removal was good. It is now possible to process 750 pieces, compared to the conventional 150 pieces tool life.

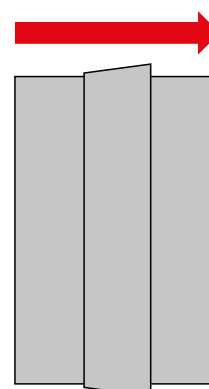

Cutting Conditions: ●: Stable cutting ●: General cutting ✖: Unstable cutting
 Cutting Area: F: Finish cutting M: Medium cutting

SYMBOLS

 Recommended cutting conditions	MACHINING TYPE
NEW Completely new products or expansions released in the current Spring or Autumn product launch and are not included in the latest version of the General Catalogue.	 Roughing
NEW Products or expansions that have already been introduced in one of the previous Spring or Autumn product launches but are not included in the latest General Catalogue.	 Medium cutting
APPLICATION	 Light cutting
 Face milling	 Pre-finishing
 Chamfer milling	 Finishing
 Shoulder milling with R	 Fine-finishing
 Face milling close to a wall	TOOL MATERIAL
 Shoulder milling	 Ultra micro grain carbide Ultra micro grain carbide substrate material.
 Side milling	 Cubic boron nitride Mitsubishi Materials' original CBN material.
 Slot milling	 Ceramic For high speed efficient machining of super alloys due to the excellent high temperature strength property.
 Ramping	 High hardness powder metallurgy HSS High hardness powder metallurgy HSS substrate material.
 Pocket milling	 High grade high alloy HSS High grade high alloy HSS substrate material.
 Slot milling with R	 Cobalt high speed steel Cobalt high speed steel substrate material.
 Copy milling	 High speed steel High speed steel substrate material.
 T-Slot milling	

SYMBOLS

COATING



SMART MIRACLE coating

New smooth and dense coating technology for high efficiency milling of difficult to cut materials.



CRN coating

Newly developed CrN coating for Copper Electrodes machining.



Violet coating

Increased tool life of 2-3 times more than TiN coated products.



DP coating

New generation coating suitable for a wide range of materials.



MIRACLE coating

The original Miracle (Al,Ti)N coating. Also suitable for dry cutting.



[Al, Ti]N coating

[Al,Ti]N highly versatile application range.



[Al,Ti,Cr]N multi-layer coating

For carbon, alloy and hardened steels.



IMPACT MIRACLE coating

Single phase nano crystal coating technology has higher film hardness and heat resistance.



MIRACLE coating

The original MIRACLE (Al,Ti)N coating. Also suitable for dry cutting.



VFR coating

The [AlCrSi]N/[AlTiSi]N PVD multilayer coating is ideal for machining of extremely hard materials up to 70 HRC.



DLC coating

Hardness similar to CVD diamond coating achieved with high adhesion strength.



Diamond coating

Suitable for CFRP and CFRP-aluminium materials.



Diamond coating

Suitable for graphite machining.



Diamond coating

The original CVD diamond coating.



CVD Diamond coating

Unique multi-layer micro-grain diamond crystal control technology drastically improves wear resistance and smoothness.

CUTTING EDGE PROPERTIES



Sharp corner edge

Indicates the end mill has a sharp corner edge.



Gash land

Indicates the end mill cutting edge has a protective chamfer.



Rake angle



Helix angle

Indicates the helix angle of the end mill.



Point angle

Indicates the drill point angle.



Roughing flute geometry



Variable helix



Rounded gash



Corner angle

WEB THINNING



X type point geometry

X web thinning used at the drill point.



XR type point geometry

XR web thinning used at the drill point.



S type point geometry

Easy cutting geometry.



N type point geometry

Effective when the point web is thick.



Chipbreaker

SYMBOLS

TOLERANCES



Tolerance of taper angle
Indicates the tolerance of the taper angle.



R tolerance
Indicates the radial tolerance of a ball nose end mill.



R tolerance
Indicates the radial tolerance of the corner radius.



R tolerance
Indicates the radial tolerance of a cutter with a corner radius.



Outside diameter tolerance
Indicates the diameter tolerance of the end mill.



Peak tolerance
Indicates the tolerance for the end diameter.



Shank diameter tolerance



Shank diameter tolerance



Drill tolerance / diameter

COOLANT HOLES



External coolant



Internal coolant



Internal coolant



Centered, internal coolant hole



Radial, internal coolant holes



Internal coolant holes



Internal coolant holes

MEMO

EUROPEAN SALES COMPANIES

GERMANY

MITSUBISHI MATERIALS TOOLS EUROPE GMBH
Comeniusstr. 2 . 40670 Meerbusch
Phone +49 2159 91890 . Fax +49 2159 918966
Email admin@mmchg.de

UK Office

MMC HARDMETAL UK LTD
1 Centurion Court, Centurion Way
Tamworth, B77 5PN
Phone +44 1827 312312
Email sales@mitsubishicarbide.co.uk

UK Deliveries / Returns

Unit 4 B5K Business Park, Quartz Close
Tamworth, B77 4GR

SPAIN

MITSUBISHI MATERIALS ESPAÑA, S.A.
Calle Emperador 2 . 46136 Museros / Valencia
Phone +34 96 1441711
Email comercial@mmevalencia.es

FRANCE

MMC METAL FRANCE S.A.R.L.
6, Rue Jacques Monod . 91400 Orsay
Phone +33 1 69 35 53 53 . Fax +33 1 69 35 53 50
Email mmfsales@mmc-metal-france.fr

POLAND

MMC HARDMETAL POLAND SP. Z O.O.
Al. Armii Krajowej 61 . 50-541 Wrocław
Phone +48 71335 1620 . Fax +48 71335 1621
Email sales@mitsubishicarbide.com.pl

ITALY

MMC ITALIA S.R.L.
Viale Certosa 144 . 20156 Milano
Phone +39 0293 77031 . Fax +39 0293 589093
Email info@mmc-italia.it

TURKEY

MITSUBISHI MATERIALS TOOLS EUROPE GMBH ALMANYA İZMİR MERKEZ ŞUBESİ
Adalet Mahallesi Anadolu Caddesi No: 41-1 . 15001 35530 Bayraklı / İzmir
Phone +90 232 5015000 . Fax +90 232 5015007
Email info@mmchg.com.tr

www.mmc-carbide.com

DISTRIBUTED BY:

┌

┐

└

┘