

WSX445

NEW GENERATION OF LOW RESISTANCE MILLING
CUTTERS WITH HIGH PERFORMANCE, DOUBLE-SIDED
INSERTS FOR EFFICIENCY AND ECONOMY




MP1220 / MP1230 / MP1240

MULTI-LAYER PVD COATING FOR MILLING

ONE INSERT SERIES TO SOLVE ALL PROBLEMS WHEN MACHINING STEELS, STAINLESS STEELS, HEAT RESISTANT AND TITANIUM ALLOYS.

GENE-TENAX COATING

By controlling the coating structure at the nano level, damage to the coating has been vastly reduced compared to conventional lamination. By successfully laminating multiple films, simultaneous strengthening of heat, wear and welding resistance is achieved. Additionally the coating is now much less prone to cracking and with the increased adhesive strength, the most stable grade for milling has been created.

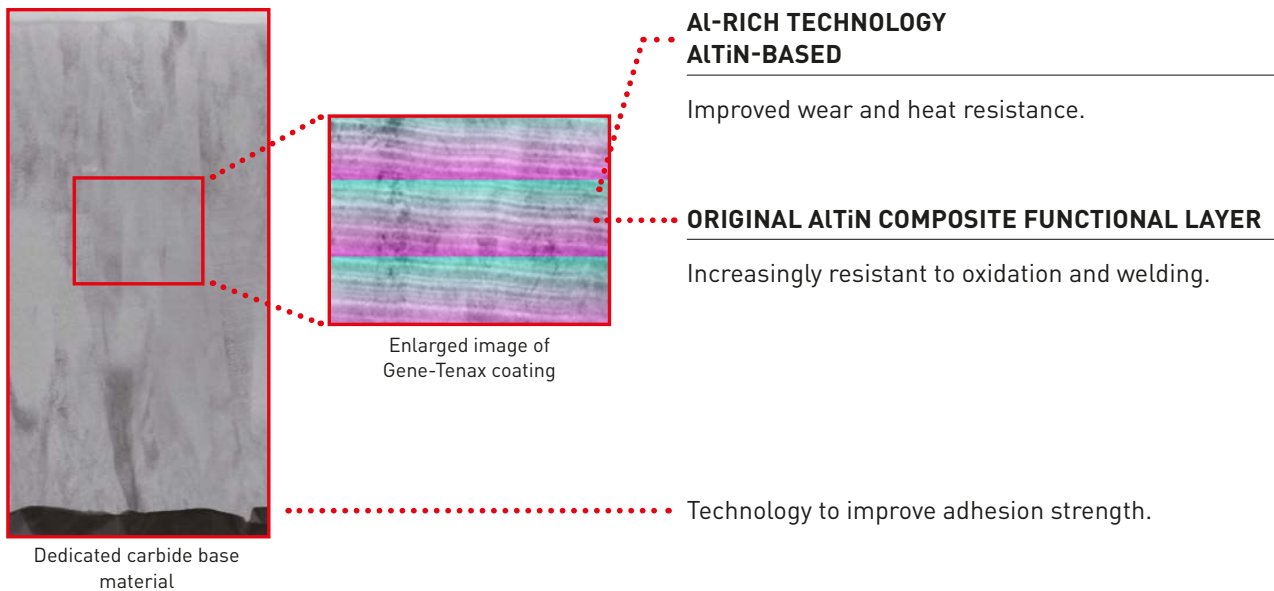

ACHIEVES TOUGHNESS FOR A WIDE RANGE OF WORK MATERIALS

STEEL MACHINING DAMAGE




Cutting edge that is resistant to wear when machining steel

STAINLESS STEEL MACHINING DAMAGE



Cutting edge that is less susceptible to notching when machining stainless steel

HEAT RESISTANT AND TITANIUM ALLOYS MACHINING DAMAGE

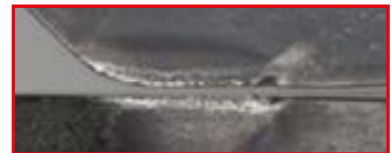

Cutting edge that is resistant to chipping when machining heat resistant and titanium alloys



Thermal cracking



Notching




Chipped cutting edge

NEW MULTILAYER TECHNOLOGY


The adoption of a new multi-layer technology has succeeded in suppressing crack propagation and dramatically improved fracture resistance when compared to conventional technology.

MP1200 SERIES MULTI-LAYER TECHNOLOGY

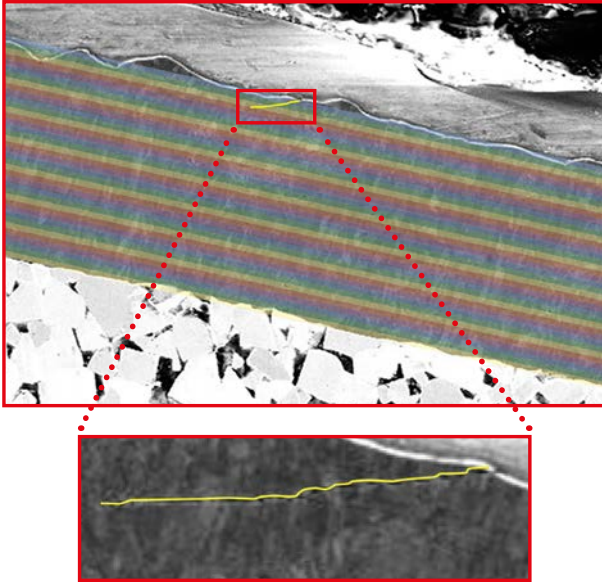

Prevents cracks


CONVENTIONAL LAYER TECHNOLOGY

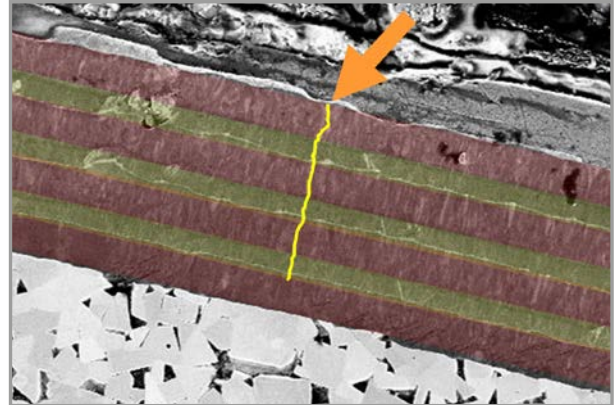

MULTI-GRADE SYSTEM

Using simulation technology, precise analysis of the cutting edge load and temperature when machining different workpiece materials was carried out. This led to the creation of different substrates for three different grades and ensures optimal performance for each type of workpiece material. Ensuring the best performance over a wide range of applications.


MP1220



MP1230



MP1240




2μm

SELECTION GUIDELINES

Steel, Carbon steel

Stainless steel

**Titanium alloys,
Heat resistant alloys**





- Hard grade
- Stable cutting
- Emphasis on wear resistance and mechanical properties

- Tough grade
- Unstable cutting
- Emphasis on fracture resistance and thermal properties

DOUBLE-Z GEOMETRY

LOW CUTTING RESISTANCE AND HIGH WEAR RESISTANCE
FOR RELIABILITY, EFFICIENT CHIP EVACUATION



Double sided Z geometry inserts feature sharp cutting edges for low cutting resistance by combining features of conventional positive and negative rake inserts.

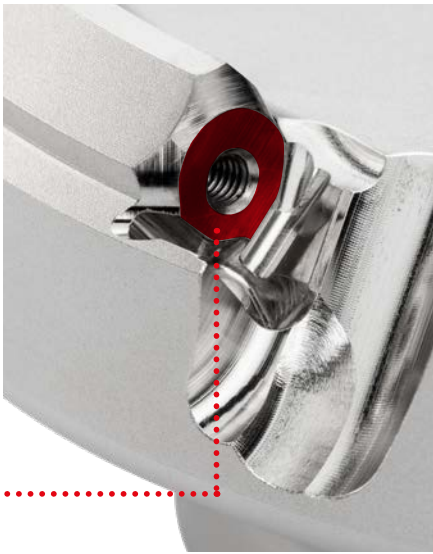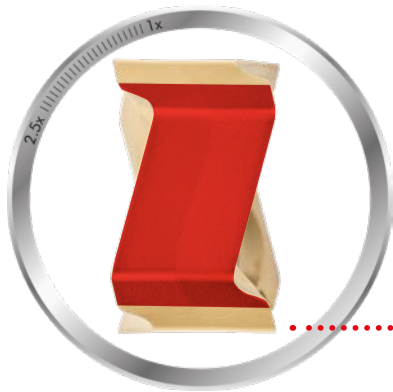

CHIPBREAKER SERIES FOR VARIED DEPTHS OF CUT AND FEEDS



L-BREAKER

Boosts performance with high rake angle.
Positive land retains strength and provides low cutting resistance.




M-BREAKER

Recommended for general applications.
Balance of cutting edge strength and sharpness with optimized positive land and rake angle.




R-BREAKER

For unstable applications.
Enhanced cutting edge strength but retains sharpness with negative land and positive rake angle.



H-BREAKER

For demanding applications.
A stronger land and reduced positive rake angle provides maximum edge strength.



WSX445

INSERT GRADES FOR A WIDE RANGE OF APPLICATIONS

P	CVD	PVD	M	CVD	PVD	K	CVD	PVD	S	PVD	H	PVD
P10	MV1020	MP1220 NEW	MP6120	VP15TF	M10	K10	MC5020	XC5010	S10	MP1220 NEW	VP15FT	H10
P20	MV1030	MP1230 NEW	MP6130	M20	MV1030	K20	MV1030	VP15TF	S20	MP9120	VP15TF	H20
P30				M30	MP1230 NEW	K30			S30	MP1230 NEW		H30
P40			M40		MP7130	K40			S40	MP9130 NEW		H40

1. Dry cutting is recommended for machining stainless steel with MV1030.

MP1220

For stable machining operations with an emphasis on wear resistance.

MP1230

Ideal for medium machining applications and for light interrupted cutting.

MP1240

The toughest grade for heavy machining and rough interrupted applications.

MV1020

This grade has advanced wear and thermal shock resistance and also achieves stable cutting at unprecedented cutting speeds, especially when machining steel and ductile cast iron, thus greatly reducing work time.

MV1030

The new Al-Rich coating also provides excellent wear resistance. An unprecedented performance against sudden breakage was also realised especially during problematic wet cutting and when machining stainless steels.

MP6120

For general milling of steel.

MP6130

For interrupted milling of steel.

MP7130

For stable milling of stainless steel.

MP7140

For unstable milling of stainless steel.

MC5020

For general milling of cast iron.

MP9120

For general milling of HRSA and titanium alloy.

MP9130

For interrupted general milling of HRSA and titanium alloy.

MX3030

For finishing.

TF15

For general milling of aluminium.

VP15TF

For stable machining when the coating is combined with a high wear and fracture resistant carbide substrate.

VP20RT


Ideal for heavy interrupted cutting of stainless and general steels because of the excellent fracture resistance properties.

WSX445

COEFFICIENT OF FRICTION

Material	Grade	Coefficient of friction (Measured at 600 degrees)		
		C55	X10CrNi18-9	Ti6Al4V
P Carbon steel, Alloy steel	MP6100	0.4		
M Stainless steel	MP7100		0.5	
S Titanium alloy, Heat resistant alloy	MP9100		0.7	0.3
Conventional		0.7		0.7

TOUGH-Σ

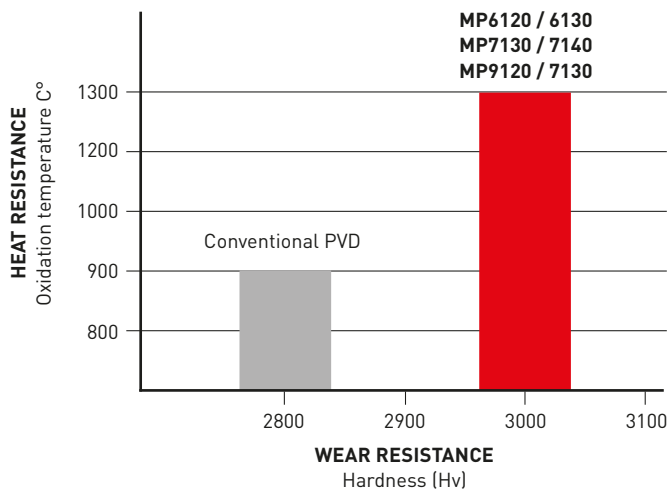

MV1000 SERIES

COATED CARBIDE GRADE FOR MILLING

ADVANCED WEAR RESISTANCE

By adopting the newly developed Al-Rich coating technology, the (Al,Ti)N with a high Al content ratio displays very high hardness. This greatly improves oxidation and wear resistance.

ADVANCED THERMAL SHOCK RESISTANCE

The extreme heat resistance of this new series achieves amazing stability, not only during dry cutting, but also when wet cutting where inserts are usually prone to thermal cracking.



Graphical representation

EXCELLENT WELDING RESISTANCE

Smooth surface.

OUTSTANDING WEAR RESISTANCE

Newly developed Al-Rich coating.

EXCELLENT CHIPPING RESISTANCE FOR STABLE MACHINING

Newly developed bonding layer.

FRACTURE RESISTANCE FOR THE ULTIMATE STABILITY

Exclusive cemented carbide substrate.





WSX445



P M K N S H



C H: 45°
A.R: +17° T: -7° - -2°
R.R: -6° - +1° I: +16° - +19°

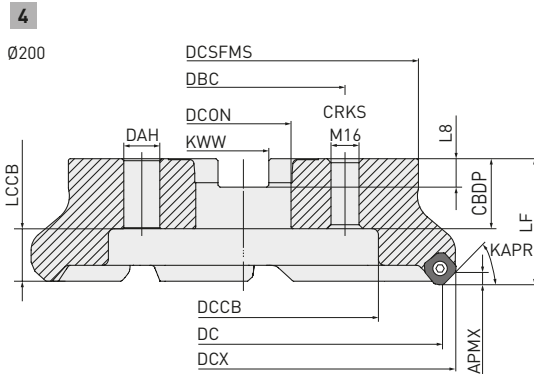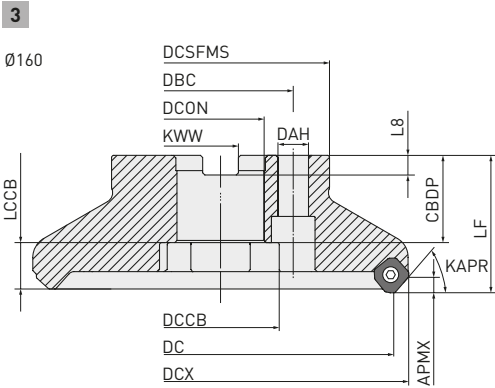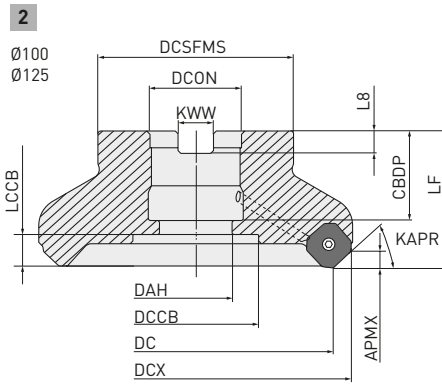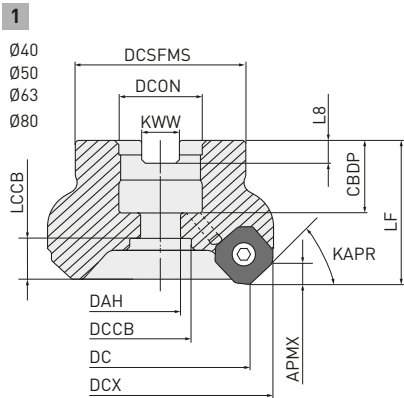

Tool holder type	Set bolt		Geometry
WSX445-040A [] AR	HSC08025H	HSC08040	1
WSX445-050A [] AR	HSC10030H	HSC10035	
WSX445-063A [] AR	HSC10030H	HSC10035	
WSX445-080A [] AR/L	HSC12035H	HSC12035 HSC12045	
WSX445-200C [] NR	◇	—	
WSX445-100B [] AR/L	MBA16033H	—	2
WSX445-125B [] AR/L	MBA20040H	—	
WSX445-160C [] NR/L	◇	—	

1. ◇ Holder without coolant hole.

ARBOR TYPE

Order number	Stock Hand		DC	DCON	LF	WT	ZEFP		Type
	R	L							
NORMAL PITCH									
WSX445-040A03AR	●		40	16	40	0.3	3	○	1
WSX445-050A03AR	●		50	22	40	0.5	3	○	1
WSX445-063A04AR	●		63	22	40	0.6	4	○	1
WSX445-080A04AR/L	●	★	80	27	50	1.3	4	○	1
WSX445-100B05AR/L	●	★	100	32	50	1.8	5	○	2
WSX445-125B06AR/L	●	★	125	40	63	3.2	6	○	2
WSX445-160C07NR/L	●	★	160	40	63	4.9	7	—	3
WSX445-200C08NR	●		200	60	63	8.7	8	—	4
1/2									

WSX445 – ARBOR TYPE

Order number	Stock Hand		DC	DCON	LF	WT	ZEFP		Type
	R	L							
FINE PITCH									
WSX445-040A04AR	●		40	16	40	0.3	4	○	1
WSX445-050A04AR	●		50	22	40	0.4	4	○	1
WSX445-063A05AR	●		63	22	40	0.6	5	○	1
WSX445-080A06AR	●		80	27	50	1.2	6	○	1
WSX445-100B07AR	●		100	32	50	1.7	7	○	2
WSX445-125B08AR	●		125	40	63	3.1	8	○	2
WSX445-160C10NR	●		160	40	63	4.8	10	—	3
WSX445-200C12NR	●		200	60	63	8.6	12	—	4
EXTRA FINE PITCH									
WSX445-050A05AR	●		50	22	40	0.4	5	○	1
WSX445-063A06AR	●		63	22	40	0.6	6	○	1
WSX445-080A08AR	●		80	27	50	1.1	8	○	1
WSX445-100B10AR	●		100	32	50	1.6	10	○	2
WSX445-125B12AR	●		125	40	63	3.0	12	○	2
WSX445-160C16NR	●		160	40	63	4.6	16	—	3
WSX445-200C20NR	●		200	60	63	8.4	20	—	4
									2/2

1. ○ = With through coolant holes



MOUNTING DIMENSIONS


Order number	CBDP	DAH	DCCB	DCSFMS	DCX	KWW	LCCB	L8	Type
NORMAL PITCH									
WSX445-040A03AR	18	9	14	37	52.8	8.4	13.3	5.6	1
WSX445-050A03AR	20	11	17	47	62.9	10.4	11.3	6.3	1
WSX445-063A04AR	20	11	17	50	75.9	10.4	11.3	6.3	1
WSX445-080A04AR / L	23	13	20	56	92.9	12.4	14.3	7	1
WSX445-100B05AR / L	26	26	45	78	112.9	14.4	16.3	8	2
WSX445-125B06AR / L	28	30	56	89	137.9	16.4	21.3	9	2
WSX445-160C07NR / L	40	56	56	100	172.9	16.4	21.3	9	3
WSX445-200C08NR	32	135	135	160	212.9	25.7	29.3	14.22	4
FINE PITCH									
WSX445-040A04AR	18	9	14	37	52.8	8.4	13.3	5.6	1
WSX445-050A04AR	20	11	17	47	62.9	10.4	11.3	6.3	1
WSX445-063A05AR	20	11	17	50	75.9	10.4	11.3	6.3	1
WSX445-080A06AR	23	13	20	56	92.9	12.4	14.3	7	1
WSX445-100B07AR	26	26	45	78	112.9	14.4	16.3	8	2
WSX445-125B08AR	28	30	56	89	137.9	16.4	21.3	9	2
WSX445-160C10NR	40	56	56	100	172.9	16.4	21.3	9	3
WSX445-200C12NR	32	135	135	160	212.9	25.7	29.3	14.22	4
EXTRA FINE PITCH									
WSX445-050A05AR	20	11	17	47	62.9	10.4	11.3	6.3	1
WSX445-063A06AR	20	11	17	50	75.9	10.4	11.3	6.3	1
WSX445-080A08AR	23	13	20	56	92.9	12.4	14.3	7	1
WSX445-100B10AR	26	26	45	78	112.9	14.4	16.3	8	2
WSX445-125B12AR	28	30	56	89	137.9	16.4	21.3	9	2
WSX445-160C16NR	40	56	56	100	172.8	16.4	21.3	9	3
WSX445-200C20NR	32	135	135	160	212.8	25.7	29.3	14.22	4
									1/1

● : Inventory maintained. ★ : Inventory maintained in Japan.

WSX445



P M K N S H

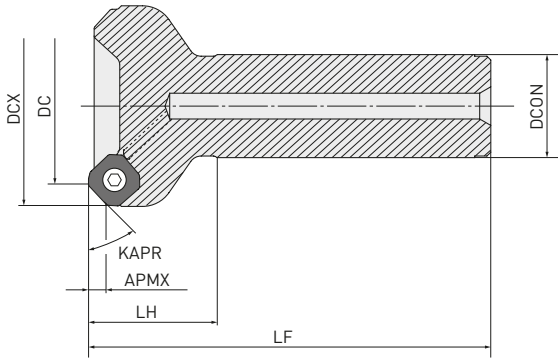

SHANK TYPE

Right hand tool holder only.

Order number	Stock	APMX	DC	DCON	DCX	LF	LH	WT	ZEFP	
NORMAL PITCH										
WSX445R-4003SA32M	★	≤ 5	40	32	52.8	125	40	0.8	3	○
WSX445R-5003SA32M	★	≤ 5	50	32	62.9	125	40	1.0	3	○
WSX445R-6304SA32M	★	≤ 5	63	32	75.9	125	40	1.2	4	○
WSX445R-8004SA32M	★	≤ 5	80	32	92.9	125	40	1.6	4	○
FINE PITCH										
WSX445R-4004SA32M	★	≤ 5	40	32	52.8	125	40	0.8	4	○
WSX445R-5004SA32M	★	≤ 5	50	32	62.9	125	40	1.0	4	○
WSX445R-6305SA32M	★	≤ 5	63	32	75.9	125	40	1.2	5	○
WSX445R-8006SA32M	★	≤ 5	80	32	92.9	125	40	1.5	6	○
										1/1

1. ○ = With through coolant holes

13

SPARE PARTS

Tool holder type	*	
Arbor Type	Clamp screw	Wrench (Insert)
Shank Type	TPS4R	TIP15W

* Clamp Torque (N•m): TPS4R=3.5

WSX445

RECOMMENDED CUTTING CONDITIONS

DRY CUTTING

Material	Properties	Grade	Vc						
				fz	ap	fz	ap	fz	ap
Mild steel	≤ 180HB	MV1020	300 (200 – 400)	0.15 (0.1 – 0.2)	≤ 1.0	0.2 (0.15 – 0.25)	≤ 2.0	0.2 (0.15 – 0.25)	≤ 4.0
		MV1030	250 (200 – 300)	0.15 (0.1 – 0.2)	≤ 1.0	0.15 (0.1 – 0.2)	≤ 2.0	0.2 (0.15 – 0.25)	≤ 4.0
		MP1220	250 (200 – 300)	0.15 (0.1 – 0.2)	< 3.0	0.2 (0.15 – 0.25)	< 4.0	0.25 (0.2 – 0.3)	< 5.0
		MP6120							
		VP15TF							
		MP1230	240 (190 – 290)	0.15 (0.1 – 0.2)	< 3.0	0.2 (0.15 – 0.25)	< 4.0	0.25 (0.2 – 0.3)	< 5.0
		MP6130							
		VP20RT							
		MX3030	180 (130 – 230)	0.15 (0.1 – 0.2)	< 1.0	0.15 (0.1 – 0.2)	< 2.0	0.2 (0.15 – 0.25)	< 3.0
Carbon steel, Alloy steel	180 – 350HB	MV1020	260 (170 – 350)	0.15 (0.1 – 0.2)	≤ 1.0	0.15 (0.1 – 0.2)	≤ 2.0	0.2 (0.15 – 0.25)	≤ 4.0
		MV1030	220 (170 – 270)	0.15 (0.1 – 0.2)	≤ 1.0	0.15 (0.1 – 0.2)	≤ 2.0	0.2 (0.15 – 0.25)	≤ 4.0
		MP1220	220 (170 – 270)	0.15 (0.1 – 0.2)	< 3.0	0.2 (0.15 – 0.25)	< 4.0	0.25 (0.2 – 0.3)	< 5.0
		MP6120							
		VP15TF							
		MP1230	200 (150 – 250)	0.15 (0.1 – 0.2)	< 3.0	0.2 (0.15 – 0.25)	< 4.0	0.25 (0.2 – 0.3)	< 5.0
		MP6130							
		VP20RT							
		MX3030	150 (120 – 180)	0.15 (0.1 – 0.2)	< 1.0	0.15 (0.1 – 0.2)	< 2.0	0.2 (0.15 – 0.25)	< 3.0
Alloy steel, Pre-Hardened steel	≤ 350HB	MV1020	180 (100 – 250)	0.15 (0.1 – 0.2)	≤ 1.0	0.15 (0.1 – 0.2)	≤ 2.0	0.2 (0.15 – 0.25)	≤ 4.0
		MV1030	180 (100 – 250)	0.15 (0.1 – 0.2)	≤ 1.0	0.15 (0.1 – 0.2)	≤ 2.0	0.2 (0.15 – 0.25)	≤ 4.0
		MP1220	140 (100 – 180)	0.15 (0.1 – 0.2)	< 2.0	0.2 (0.15 – 0.25)	< 4.0	0.25 (0.2 – 0.3)	< 5.0
		MP6120							
		VP15TF							
		MP1230	120 (90 – 150)	0.15 (0.1 – 0.2)	< 2.0	0.2 (0.15 – 0.25)	< 4.0	0.25 (0.2 – 0.3)	< 5.0
		MP6130							
		VP20RT							
		MX3030	150 (120 – 180)	0.15 (0.1 – 0.2)	< 1.0	0.15 (0.1 – 0.2)	< 2.0	0.2 (0.15 – 0.25)	< 3.0

1/2

1/2

WSX445 – DRY CUTTING

Material	Properties	Grade	Vc	 		 		 	
				fz	ap	fz	ap	fz	ap
M	Austenitic, Ferritic and martensitic stainless steel	MV1030	200 (150 – 250)	0.15 (0.1 – 0.2)	< 2.0	0.2 (0.15 – 0.25)	< 3.0	—	—
		MP1230							
		MP7130							
		MP1240							
		MP7140							
		VP15TF							
		VP20RT							
	Austenitic stainless steel	MP1230	170 (120 – 220)	0.15 (0.1 – 0.2)	< 2.0	0.2 (0.15 – 0.25)	< 3.0	—	—
		MP7130							
		MP1240							
		MP7140							
		VP15TF							
		VP20RT							
		VP20RT							
	Two-phase stainless steel	MP1230	160 (110 – 210)	0.15 (0.1 – 0.2)	< 2.0	0.2 (0.15 – 0.25)	< 3.0	—	—
		MP7130							
		MP1240							
		MP7140							
		VP15TF							
		VP20RT							
		VP20RT							
	Hardened stainless steel	MP1230	150 (100 – 200)	0.15 (0.1 – 0.2)	< 2.0	0.2 (0.15 – 0.25)	< 3.0	—	—
		MP7130							
		MP1240							
		MP7140							
		VP15TF							
		VP20RT							
		VP20RT							
K	Gray cast iron	MV1020	240 (130 – 350)	0.15 (0.1 – 0.2)	≤ 1.0	0.15 (0.1 – 0.2)	≤ 2.0	0.2 (0.15 – 0.25)	≤ 4.0
		MC5020	220 (200 – 270)	0.15 (0.1 – 0.2)	< 3.0	0.2 (0.15 – 0.25)	< 4.0	0.25 (0.2 – 0.3)	< 5.0
		VP15TF	180 (130 – 250)	0.15 (0.1 – 0.2)	< 3.0	0.2 (0.15 – 0.25)	< 4.0	0.25 (0.2 – 0.3)	< 5.0
		VP20RT							
		MV1030	160 (110 – 240)	0.15 (0.1 – 0.2)	≤ 1.0	0.15 (0.1 – 0.2)	≤ 2.0	0.2 (0.15 – 0.25)	≤ 4.0
		MX3030	150 (120 – 180)	0.15 (0.1 – 0.2)	< 1.0	0.15 (0.1 – 0.2)	< 2.0	0.2 (0.15 – 0.25)	< 3.0
	Ductile cast iron	MV1020	220 (80 – 350)	0.15 (0.1 – 0.2)	≤ 1.0	0.15 (0.1 – 0.2)	≤ 2.0	0.2 (0.15 – 0.25)	≤ 4.0
		MC5020	200 (180 – 250)	0.15 (0.1 – 0.2)	< 3.0	0.2 (0.15 – 0.25)	< 4.0	0.25 (0.2 – 0.3)	< 5.0
		MV1030	180 (110 – 250)	0.15 (0.1 – 0.2)	≤ 1.0	0.15 (0.1 – 0.2)	≤ 2.0	0.2 (0.15 – 0.25)	≤ 4.0
		VP15TF	160 (110 – 240)	0.15 (0.1 – 0.2)	< 3.0	0.2 (0.15 – 0.25)	< 4.0	0.25 (0.2 – 0.3)	< 5.0
		VP20RT							
H	Hardened steel	40 – 55HRC	VP15TF	50 (30 – 70)	0.05 (0.05 – 0.1)	< 1.5	0.1 (0.05 – 0.15)	< 2.0	—

2/2

1. Please set the cutting conditions according to the system requirements referring to the above table.
2. Wet cutting is recommended for better surface finishes. (tool life is shorter when compared to dry cutting.)

WSX445 – WET CUTTING

Material	Properties	Grade	Vc	 — 		 — 		 — 	
				fz	ap	fz	ap	fz	ap
P	Mild steel	< 180HB	MV1020	220 (120 – 320)	0.15 (0.1 – 0.2) ≤ 1.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0		
			MV1030	150 (100 – 200)	0.15 (0.1 – 0.2) ≤ 1.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0		
			MP1220	150 (100 – 200)	0.15 (0.1 – 0.2) ≤ 3.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0		
			MP6120						
			MP1230						
			VP15TF						
			MP6130	150 (100 – 200)	0.15 (0.1 – 0.2) ≤ 3.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0		
			VP20RT						
	Carbon steel, Alloy steel	180 – 350HB	MV1020	200 (100 – 300)	0.15 (0.1 – 0.2) ≤ 1.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0		
			MV1030	120 (80 – 160)	0.15 (0.1 – 0.2) ≤ 1.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0		
			MP1220	120 (80 – 160)	0.15 (0.1 – 0.2) ≤ 3.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0		
			MP6120						
			MP1230						
			VP15TF						
			MP6130	120 (80 – 160)	0.15 (0.1 – 0.2) ≤ 3.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0		
			VP20RT						
	Alloy Steel, Pre-hardened steel	35 – 45HRC	MV1020	150 (100 – 200)	0.15 (0.1 – 0.2) ≤ 1.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0		
			MV1030	120 (80 – 160)	0.15 (0.1 – 0.2) ≤ 1.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0		
			MP1220	100 (80 – 120)	0.15 (0.1 – 0.2) ≤ 2.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0		
			MP6120						
			MP1230						
			VP15TF						
			MP6130	100 (80 – 120)	0.15 (0.1 – 0.2) ≤ 2.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0		
			VP20RT						
M	Austenitic, Ferritic and martensitic stainless steel	—	MP1230	130 (80 – 180)	0.15 (0.1 – 0.2) ≤ 2.0	0.2 (0.15 – 0.25) ≤ 2.0	—	—	
			MP7130						
			MP1240						
			MP7140						
			VP15TF						
			VP20RT						
	Austenitic stainless steel	>200HB	MP1230	100 (80 – 150)	0.15 (0.1 – 0.2) ≤ 2.0	0.2 (0.15 – 0.25) ≤ 3.0	—	—	
			MP7130						
			MP1240						
			MP7140						
			VP15TF						
			VP20RT						
	Two-phase stainless steel	≤ 280MPa	MP1230	100 (80 – 150)	0.15 (0.1 – 0.2) ≤ 2.0	0.2 (0.15 – 0.25) ≤ 3.0	—	—	
			MP7130						
			MP1240						
			MP7140						
			VP15TF						
			VP20RT						
	Hardened stainless steel	< 450HB	MP1230	90 (50 – 140)	0.15 (0.1 – 0.2) ≤ 2.0	0.2 (0.15 – 0.25) ≤ 3.0	—	—	
			MP7130						
			MP1240						
			MP7140						
			VP15TF						
			VP20RT						

WSX445 – WET CUTTING

Material	Properties	Grade	Vc						
				fz	ap	fz	ap	fz	ap
K	Gray cast iron	Tensile Strength <350MPa	MV1020	200 (130 – 250)	0.15 (0.1 – 0.2) ≤ 1.0	0.2 (0.15 – 0.25) ≤ 4.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0	0.25 (0.2 – 0.3) ≤ 5.0
			MC5020	180 (160 – 200)	0.15 (0.1 – 0.2) ≤ 3.0	0.2 (0.15 – 0.25) ≤ 4.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0	0.25 (0.2 – 0.3) ≤ 5.0
			MV1030	150 (100 – 200)	0.15 (0.1 – 0.2) ≤ 1.0	0.2 (0.15 – 0.25) ≤ 4.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0	0.25 (0.2 – 0.3) ≤ 5.0
			VP15TF	130 (100 – 160)	0.15 (0.1 – 0.2) ≤ 3.0	0.2 (0.15 – 0.25) ≤ 4.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0	0.25 (0.2 – 0.3) ≤ 5.0
			VP20RT						
	Ductile cast iron	Tensile Strength <800MPa	MV1020	220 (80 – 350)	0.15 (0.1 – 0.2) ≤ 1.0	0.2 (0.15 – 0.25) ≤ 4.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0	0.25 (0.2 – 0.3) ≤ 5.0
			MC5020	180 (160 – 200)	0.15 (0.1 – 0.2) ≤ 3.0	0.2 (0.15 – 0.25) ≤ 4.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0	0.25 (0.2 – 0.3) ≤ 5.0
			MV1030	140 (80 – 200)	0.15 (0.1 – 0.2) ≤ 1.0	0.2 (0.15 – 0.25) ≤ 4.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0	0.25 (0.2 – 0.3) ≤ 5.0
			VP15TF	110 (80 – 140)	0.15 (0.1 – 0.2) ≤ 3.0	0.2 (0.15 – 0.25) ≤ 4.0	0.2 (0.15 – 0.25) ≤ 4.0	0.25 (0.2 – 0.3) ≤ 5.0	0.25 (0.2 – 0.3) ≤ 5.0
			VP20RT						
N	Aluminium alloy	—	TF15	500 (200 – 1000)	0.2 (0.1 – 0.3) ≤ 5.0	—	—	—	—
S	Titanium alloy	—	MP1220	50 (40 – 60)	0.05 (0.05 – 0.1) ≤ 1.5	0.1 (0.05 – 0.15) ≤ 2.0	0.1 (0.05 – 0.15) ≤ 2.0	—	—
			MP9120						
			MP1230						
			MP9130						
			MP1240						
			VP15TF						
			VP20RT						
	Heat resistant alloy	—	MP1220	40 (20 – 50)	0.05 (0.05 – 0.1) ≤ 1.5	0.1 (0.05 – 0.15) ≤ 2.0	0.1 (0.05 – 0.15) ≤ 2.0	—	—
			MP9120						
			MP1230						
			MP9130						
			MP1240						
			VP15TF						
H	Hardened steel	40–55HRC	VP15TF	50 (30 – 70)	0.05 (0.05 – 0.1) ≤ 1.5	0.1 (0.05 – 0.15) ≤ 2.0	0.1 (0.05 – 0.15) ≤ 2.0	—	—

2/2

SYMBOLS



Recommended cutting conditions

NEW

Completely new products or expansions released in the current Spring or Autumn product launch and are not included in the latest version of the General Catalogue.

NEW

Products or expansions that have already been introduced in one of the previous Spring or Autumn product launches but are not included in the latest General Catalogue.

APPLICATION



Face milling



Chamfer milling



Shoulder milling with R



Face milling close to a wall



Shoulder milling



Side milling



Slot milling



Ramping



Pocket milling



Slot milling with R



Copy milling



T-Slot milling

MACHINING TYPE



Roughing



Medium cutting



Light cutting



Pre-finishing



Finishing



Fine-finishing

TOOL MATERIAL



Ultra micro grain carbide
Ultra micro grain carbide substrate material.



Cubic boron nitride
Mitsubishi Materials' original CBN material.



Ceramic
For high speed efficient machining of super alloys due to the excellent high temperature strength property.



High hardness powder metallurgy HSS
High hardness powder metallurgy HSS substrate material.



High grade high alloy HSS
High grade high alloy HSS substrate material.



Cobalt high speed steel
Cobalt high speed steel substrate material.



High speed steel
High speed steel substrate material.

SYMBOLS

COATING



SMART MIRACLE coating

New smooth and dense coating technology for high efficiency milling of difficult to cut materials.



CRN coating

Newly developed CrN coating for Copper Electrodes machining.



Violet coating

Increased tool life of 2-3 times more than TiN coated products.



DP coating

New generation coating suitable for a wide range of materials.



MIRACLE coating

The original Miracle (Al,Ti)N coating. Also suitable for dry cutting.



[Al, Ti]N coating

[Al,Ti]N highly versatile application range.



[Al,Ti,Cr]N multi-layer coating

For carbon, alloy and hardened steels.



IMPACT MIRACLE coating

Single phase nano crystal coating technology has higher film hardness and heat resistance.



MIRACLE coating

The original MIRACLE (Al,Ti)N coating. Also suitable for dry cutting.



VFR coating

The [AlCrSi]N/[AlTiSi]N PVD multilayer coating is ideal for machining of extremely hard materials up to 70 HRC.



DLC coating

Hardness similar to CVD diamond coating achieved with high adhesion strength.



Diamond coating

Suitable for CFRP and CFRP-aluminium materials.



Diamond coating

Suitable for graphite machining.



Diamond coating

The original CVD diamond coating.



CVD Diamond coating

Unique multi-layer micro-grain diamond crystal control technology drastically improves wear resistance and smoothness.

CUTTING EDGE PROPERTIES



Sharp corner edge

Indicates the end mill has a sharp corner edge.



Gash land

Indicates the end mill cutting edge has a protective chamfer.



Rake angle



Helix angle

Indicates the helix angle of the end mill.



Point angle

Indicates the drill point angle.



Roughing flute geometry



Variable helix



Rounded gash



Corner angle

WEB THINNING



X type point geometry

X web thinning used at the drill point.



XR type point geometry

XR web thinning used at the drill point.



S type point geometry

Easy cutting geometry.



N type point geometry

Effective when the point web is thick.



Chipbreaker

SYMBOLS

TOLERANCES



Tolerance of taper angle
Indicates the tolerance of the taper angle.



R tolerance
Indicates the radial tolerance of a ball nose end mill.



R tolerance
Indicates the radial tolerance of the corner radius.



R tolerance
Indicates the radial tolerance of a cutter with a corner radius.



Outside diameter tolerance
Indicates the diameter tolerance of the end mill.



Peak tolerance
Indicates the tolerance for the end diameter.



Shank diameter tolerance



Shank diameter tolerance



Drill tolerance / diameter

COOLANT HOLES



External coolant



Internal coolant



Internal coolant



Centered, internal coolant hole



Radial, internal coolant holes



Internal coolant holes



Internal coolant holes

EUROPEAN SALES COMPANIES

GERMANY

MITSUBISHI MATERIALS TOOLS EUROPE GMBH
Comeniusstr. 2 . 40670 Meerbusch
Phone +49 2159 91890 . Fax +49 2159 918966
Email admin@mmchg.de

UK Office

MMC HARDMETAL UK LTD
1 Centurion Court, Centurion Way
Tamworth, B77 5PN
Phone +44 1827 312312
Email sales@mitsubishicarbide.co.uk

UK Deliveries / Returns

Unit 4 B5K Business Park, Quartz Close
Tamworth, B77 4GR

SPAIN

MITSUBISHI MATERIALS ESPAÑA, S.A.
Calle Emperador 2 . 46136 Museros / Valencia
Phone +34 96 1441711
Email comercial@mmevalencia.es

FRANCE

MMC METAL FRANCE S.A.R.L.
6, Rue Jacques Monod . 91400 Orsay
Phone +33 1 69 35 53 53 . Fax +33 1 69 35 53 50
Email mmfsales@mmc-metal-france.fr

POLAND

MMC HARDMETAL POLAND SP. Z O.O.
Al. Armii Krajowej 61 . 50-541 Wrocław
Phone +48 71335 1620 . Fax +48 71335 1621
Email sales@mitsubishicarbide.com.pl

ITALY

MMC ITALIA S.R.L.
Viale Certosa 144 . 20156 Milano
Phone +39 0293 77031 . Fax +39 0293 589093
Email info@mmc-italia.it

TURKEY

MITSUBISHI MATERIALS TOOLS EUROPE GMBH ALMANYA İZMİR MERKEZ ŞUBESİ
Adalet Mahallesi Anadolu Caddesi No: 41-1 . 15001 35530 Bayraklı / İzmir
Phone +90 232 5015000 . Fax +90 232 5015007
Email info@mmchg.com.tr

www.mmc-carbide.com

DISTRIBUTED BY:

┌

┐

└

┘