

VFR

IDEAL FOR MACHINING HARDENED STEELS –
REVOLUTIONARY COATING TECHNOLOGY PROVIDES
OUTSTANDING TOOL LIFE






END MILL SERIES FOR MILLING HIGH HARDNESS STEELS

NEW COATING TECHNOLOGY

Newly developed (AlCrSi)N multi-layer PVD coating offers higher oxidation resistance and better lubricity, together with improved wear resistance and adhesion strength. Ideal for milling extremely hard materials up to 70 HRC.

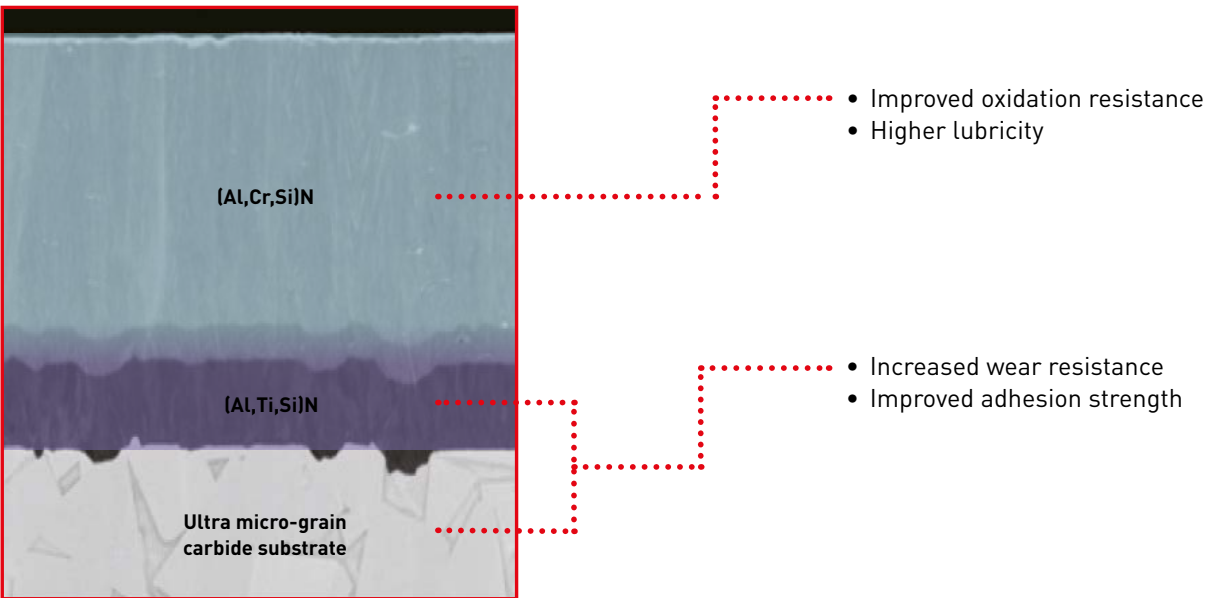

TOOL SELECTION ACCORDING TO THE HARDNESS OF THE WORKPIECE MATERIAL




VFRSD/MD/LD VFRSDRB/MDRB


IDEAL CHOICE FOR EFFICIENT MACHINING OF HIGH-HARDNESS MATERIALS

To successfully achieve high-speed machining with multi-flute end mills, a high helix angle flute geometry is required to provide the necessary sharpness and negative rake end cutting edges enables the strength needed for reliability.

HIGH HELIX ANGLE 45°
Improved geometry for high-hardness
steel machining.

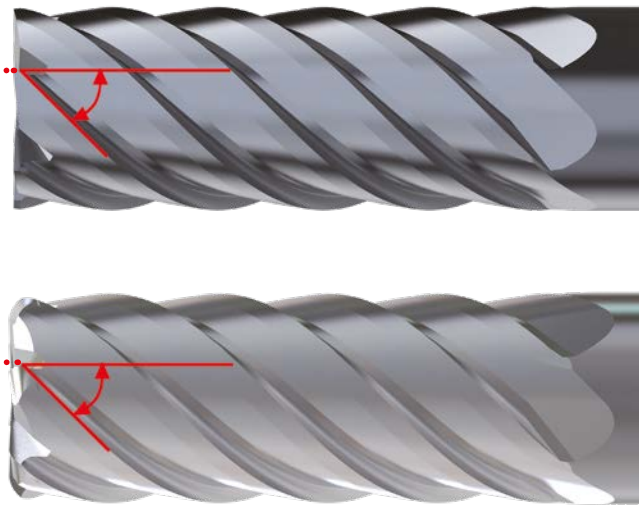

NEGATIVE RAKE ANGLE CUTTING EDGES
Provides excellent chipping resistance.

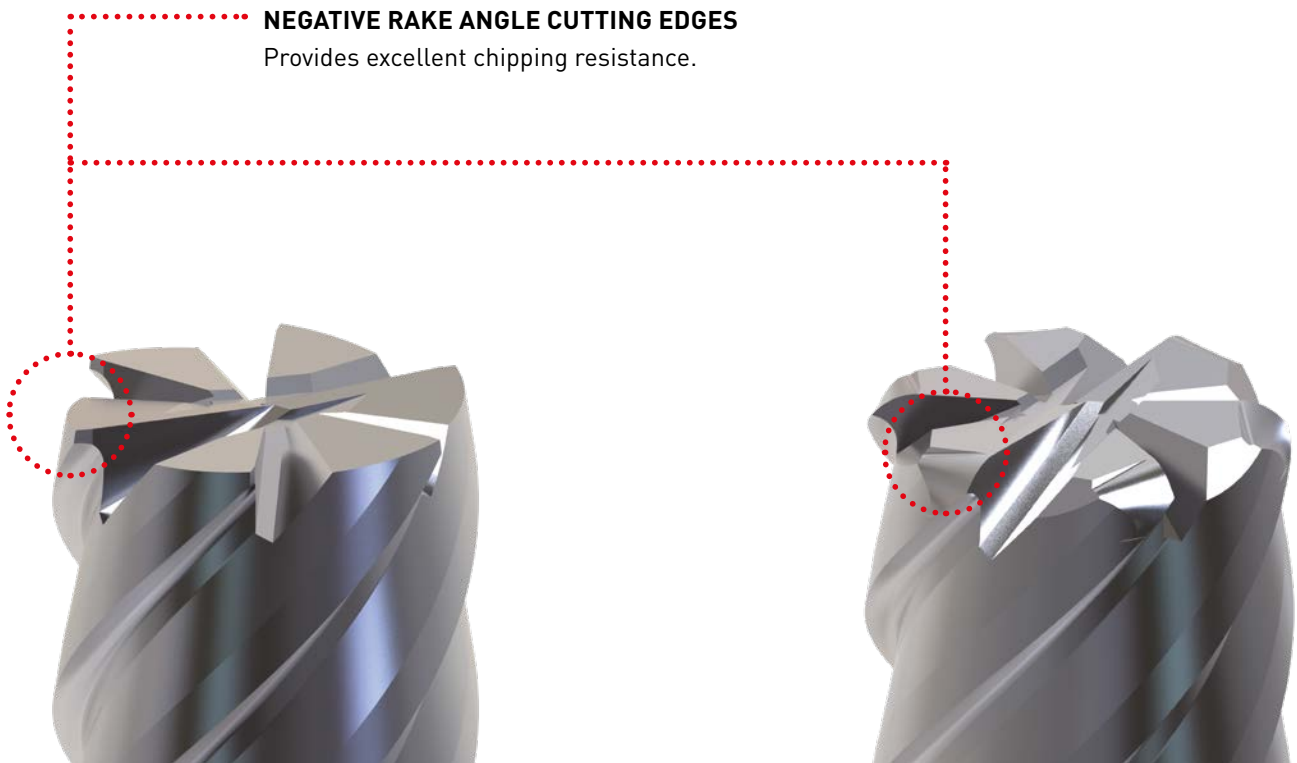


CUTTING PERFORMANCE

VFRSD/MD/LD


TOOL LIFE COMPARISON MACHINING HAP72 (67.0 HRC)

Compared to conventional products, more than 1.5 times longer tool life and stable machining was achieved.

Material	HAP72 (67.0 HRC)
Tool	VFRMDD0600 / DC = 6 mm
n (min ⁻¹)	5300
Vc (m/min)	100
Vf (mm/min)	1800
ap (mm)	6
ae (mm)	0.1
Overhang length (mm)	22
Cutting mode	Air blow Down(climb) cut
Machine	Vertical MC (BT30)

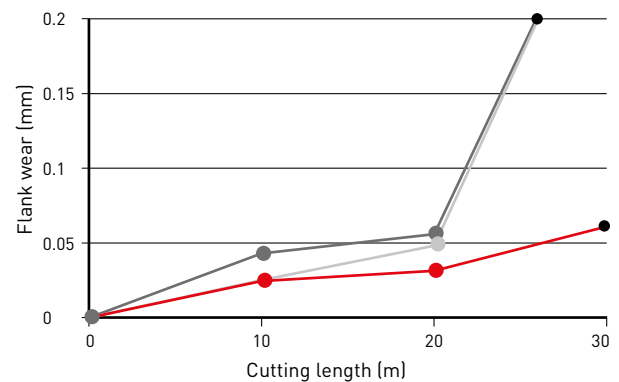


● Photo taken after this length of cutting.



VFRMD



Conventional A




Conventional B

VFRSDRB/MDRB

TOOL LIFE COMPARISON MACHINING X153CRM012/1.2379

Compared to conventional products, double tool life and stability during machining was achieved.


Material	X153CrMo12/1.2379
Tool	VFRMDRBD0600R050 / DC = 6 mm
n (min ⁻¹)	8000
Vc (m/min)	150
Vf (mm/min)	2400
ap (mm)	5
ae (mm)	0.1
Overhang length (mm)	22
Cutting mode	Air blow Down(climb) cut
Machine	Vertical MC (BT40)

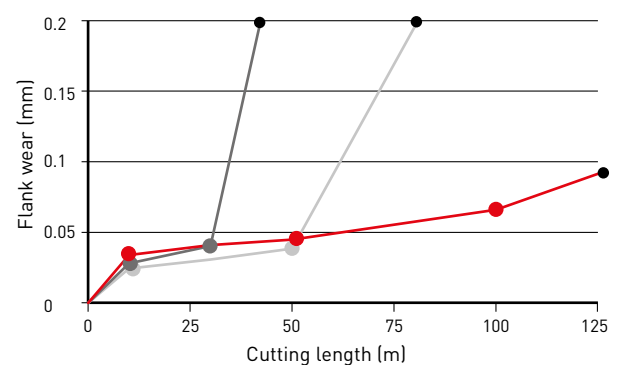


● Photo taken at this length of cutting.



VFRMDRB



Conventional A





Conventional B

CUTTING PERFORMANCE

VFR2MV/4MV

SUPPRESSES CHATTER AND VIBRATION AND PROVIDES CONSISTENT SURFACE FINISHES

Chatter and vibrations are suppressed through the use of irregular helix and flute pitch geometry, combined with a highly rigid centre cross section.

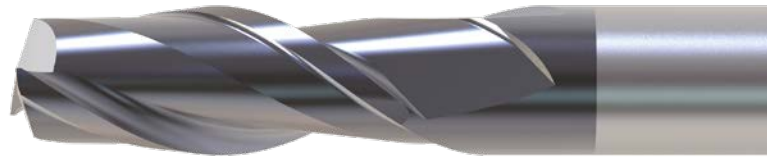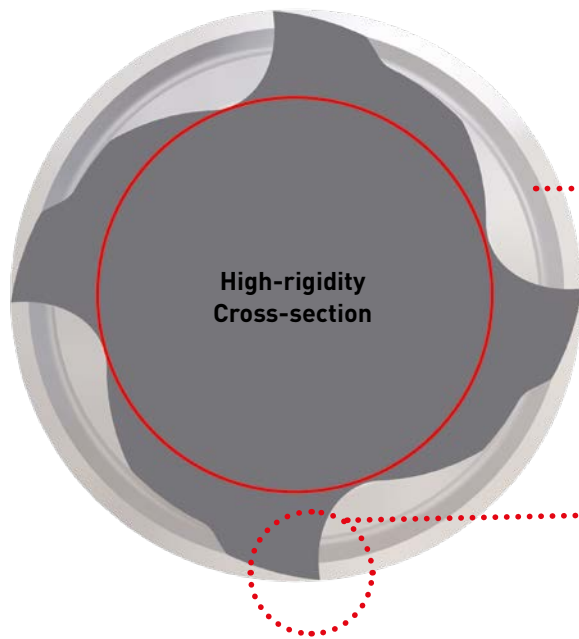

• POSITIVE RAKE ANGLE CUTTING EDGES

Low cutting resistance contributes to stable workpiece surface finishes.

CUTTING PERFORMANCE

VFR2MV/4MV

COMPARISON OF SURFACE FINISHES WHEN MACHINING X40CRM0V5-1 / 1.2344


Demonstrates excellent resistance to chatter when machining hardened steels.

Material	X40CrMoV5-1 / 1.2344
Tool	VFR4MVD0600 / DC = 6 mm
n (min ⁻¹)	5300
Vc (m/min)	100
Vf (mm/min)	1060
ap (mm)	12
ae (mm)	0.3
Cutting mode	Air blow
	Down(climb) cut
	Corner radius machining
Machine	Vertical MC (BT30)





Workpiece geometry with R18

CHATTER AND VIBRATION OCCURRED



VFRMDRB



Conventional

VFR

CLASSIFICATION

Product code		Shape	DC	P	H	M	S	N	
RADIUS END MILLS									
VFRPSRB	Corner radius, short cut length, long neck		0.5 – 12	○	◎				9
NEW VFRSDRB	Short cut length, 6 flute		3.0 – 12	○	◎				18
NEW VFRMDRB	Medium cut length, 6 flute		3.0 – 20	○	◎				20
SQUARE END MILLS									
NEW VFR2MV	Medium cut length, 2 flute, irregular helix flutes		0.5 – 6.0	○	◎				22
NEW VFR4MV	Medium cut length, 4 flute, irregular helix flutes			○	◎				24
NEW VFRSD	Short cut length, 4/6 flute			○	◎				26
NEW VFRMD	Medium cut length, 4/6 flute			○	◎				29
NEW VFRLD	Long cut length, 6 flute			○	◎				32

VFR – CLASSIFICATION

Product code		Shape	DC	P	H	M	S	N	
BALL NOSE END MILLS									
VFR4MB	Ball nose, medium cut length, 4 flute		1 – 12	○	◎				34
VFR2XLB	Ball nose, 2 Flute, long neck		0.2 – 6	○	◎				36
VFR2SSB	Ball nose, 2 flute, short cut length, short shank		1 – 12	○	◎				42
VFR2SB	Ball nose, 2 flute, short cut length		0.2 – 20	○	◎				44
VFR2SBF	Ball nose, 2 flute, short cut length, for mirror finishing		1 – 6	○	◎				48
2/2									

VFRPSRB




DC ≤ 1 DC ≥ 1.5

CORNER RADIUS, SHORT CUT LENGTH, LONG NECK


H



1

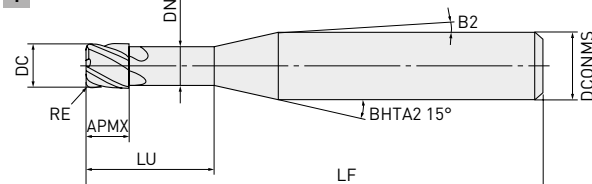

2

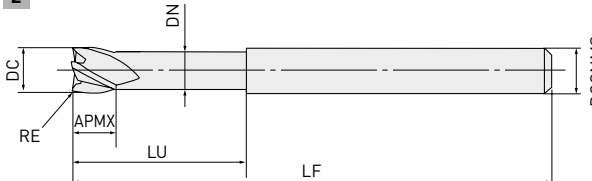


$0.5 \leq RE \leq 6$	$8 \leq RE$
± 0.005	± 0.007



$0.5 \leq DC \leq 6$	$8 \leq RE$
0	0
- 0.01	- 0.015



DCONMS = 6	$8 \leq DCONMS \leq 10$	$12 \leq DCONMS$
0	0	0
- 0.005	- 0.006	- 0.008

Effective length
for inclined angle

- Suitable for high precision machining and creating smooth surfaces on moulds and dies.

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCONMS	B2	ZEFP	Type	Effective length for inclined angle			
												30°	1°	2°	3°
VFRPSRBD0050R005N020	●	0.05	0.5	0.5	2	0.47	50	6	12.6	4	1	2.1	2.2	2.3	2.5
VFRPSRBD0050R010N020	●	0.1	0.5	0.5	2	0.47	50	6	12.7	4	1	2.1	2.2	2.3	2.5
VFRPSRBD0060R005N020	●	0.05	0.6	0.6	2	0.57	50	6	12.5	4	1	2.1	2.2	2.4	2.6
VFRPSRBD0060R010N020	●	0.1	0.6	0.6	2	0.57	50	6	12.5	4	1	2.1	2.2	2.3	2.6
VFRPSRBD0060R010N040	●	0.1	0.6	0.6	4	0.57	50	6	10.8	4	1	4.2	4.4	4.7	5.1
VFRPSRBD0060R020N020	●	0.2	0.6	0.6	2	0.57	50	6	12.6	4	1	2.1	2.2	2.2	2.6
VFRPSRBD0080R005N040	●	0.05	0.8	0.8	4	0.77	50	6	10.7	4	1	4.2	4.4	4.7	5.1
VFRPSRBD0080R010N040	●	0.1	0.8	0.8	4	0.77	50	6	10.7	4	1	4.2	4.4	4.7	5.1
VFRPSRBD0080R020N040	●	0.2	0.8	0.8	4	0.77	50	6	10.8	4	1	4.2	4.4	4.7	5.1
VFRPSRBD0080R030N040	●	0.3	0.8	0.8	4	0.77	50	6	10.8	4	1	4.2	4.4	4.7	5
VFRPSRBD0100R005N040	●	0.05	1	1	4	0.96	50	6	10.4	4	1	4.3	4.5	4.9	5.4
VFRPSRBD0100R010N040	●	0.1	1	1	4	0.96	50	6	10.4	4	1	4.3	4.5	4.9	5.4
VFRPSRBD0100R010N060	●	0.1	1	1	6	0.96	50	6	9.1	4	1	6.4	6.7	7.3	7.9
VFRPSRBD0100R020N040	●	0.2	1	1	4	0.96	50	6	10.5	4	1	4.3	4.5	4.7	5.3
VFRPSRBD0100R020N060	●	0.2	1	1	6	0.96	50	6	9.2	4	1	6.4	6.7	7.3	7.8
VFRPSRBD0100R030N040	●	0.3	1	1	4	0.96	50	6	10.5	4	1	4.3	4.5	4.6	5.3
VFRPSRBD0100R040N040	●	0.4	1	1	4	0.96	50	6	10.6	4	1	4.3	4.5	4.5	5.3
VFRPSRBD0150R010N040	●	0.1	1.5	1.5	4	1.42	50	6	10.2	4	1	4.2	4.4	4.8	5.2

1/3

VFRPSRB – CORNER RADIUS, SHORT CUT LENGTH, LONG NECK

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCONMS	B2	ZEFP	Type	Effective length for inclined angle			
												30°	1°	2°	3°
VFRPSRBD0150R010N060	●	0.1	1.5	1.5	6	1.42	50	6	8.8	4	1	6.3	6.6	7.1	7.7
VFRPSRBD0150R010N100	●	0.1	1.5	1.5	10	1.42	50	6	6.9	4	1	10.5	10.9	11.7	12.7
VFRPSRBD0150R020N040	●	0.2	1.5	1.5	4	1.42	50	6	10.2	4	1	4.2	4.4	4.6	5.2
VFRPSRBD0150R020N060	●	0.2	1.5	1.5	6	1.42	50	6	8.8	4	1	6.3	6.6	7.1	7.7
VFRPSRBD0150R020N100	●	0.2	1.5	1.5	10	1.42	50	6	7	4	1	10.5	10.9	11.7	12.6
VFRPSRBD0150R030N040	●	0.3	1.5	1.5	4	1.42	50	6	10.3	4	1	4.2	4.4	4.5	5.2
VFRPSRBD0150R030N060	●	0.3	1.5	1.5	6	1.42	50	6	8.9	4	1	6.3	6.6	7.1	7.6
VFRPSRBD0150R030N100	●	0.3	1.5	1.5	10	1.42	50	6	7	4	1	10.5	10.9	11.7	12.6
VFRPSRBD0150R050N040	●	0.5	1.5	1.5	4	1.42	50	6	10.5	4	1	4.2	4.4	4.3	5.1
VFRPSRBD0150R050N060	●	0.5	1.5	1.5	6	1.42	50	6	9	4	1	6.3	6.6	7.1	7.6
VFRPSRBD0150R050N100	●	0.5	1.5	1.5	10	1.42	50	6	7.1	4	1	10.5	10.9	11.7	12.6
VFRPSRBD0200R010N060	●	0.1	2	2	6	1.9	50	6	8.4	4	1	6.3	6.6	7.1	7.6
VFRPSRBD0200R010N100	●	0.1	2	2	10	1.9	50	6	6.5	4	1	10.5	10.9	11.7	12.6
VFRPSRBD0200R010N150	●	0.1	2	2	15	1.9	50	6	5.1	4	1	15.7	16.2	17.4	18.8
VFRPSRBD0200R020N060	●	0.2	2	2	6	1.9	50	6	8.4	4	1	6.3	6.6	7.1	7.6
VFRPSRBD0200R020N100	●	0.2	2	2	10	1.9	50	6	6.5	4	1	10.5	10.9	11.7	12.6
VFRPSRBD0200R020N150	●	0.2	2	2	15	1.9	50	6	5.1	4	1	15.7	16.2	17.4	18.8
VFRPSRBD0200R030N060	●	0.3	2	2	6	1.9	50	6	8.5	4	1	6.3	6.6	7	7.6
VFRPSRBD0200R030N100	●	0.3	2	2	10	1.9	50	6	6.6	4	1	10.5	10.8	11.6	12.6
VFRPSRBD0200R030N150	●	0.3	2	2	15	1.9	50	6	5.1	4	1	15.7	16.2	17.4	18.8
VFRPSRBD0200R030N200	●	0.3	2	2	20	1.9	60	6	4.2	4	1	20.8	21.5	23.1	25
VFRPSRBD0200R050N060	●	0.5	2	2	6	1.9	50	6	8.6	4	1	6.3	6.5	7	7.5
VFRPSRBD0200R050N100	●	0.5	2	2	10	1.9	50	6	6.6	4	1	10.5	10.8	11.6	12.5
VFRPSRBD0200R050N150	●	0.5	2	2	15	1.9	50	6	5.2	4	1	15.6	16.2	17.4	18.7
VFRPSRBD0200R050N200	●	0.5	2	2	20	1.9	60	6	4.2	4	1	20.8	21.5	23.1	24.9
VFRPSRBD0250R030N080	●	0.3	2.5	2.5	8	2.35	50	6	6.9	4	1	8.3	8.6	9.2	10
VFRPSRBD0250R030N150	●	0.3	2.5	2.5	15	2.35	50	6	4.7	4	1	15.6	16.1	17.3	18.7
VFRPSRBD0250R050N080	●	0.5	2.5	2.5	8	2.35	50	6	7	4	1	8.3	8.6	9.2	9.9
VFRPSRBD0250R050N150	●	0.5	2.5	2.5	15	2.35	50	6	4.7	4	1	15.6	16.1	17.3	18.6
VFRPSRBD0250R100N080	●	1	2.5	2.5	8	2.35	50	6	7.3	4	1	8.3	8.6	9.1	9.8
VFRPSRBD0300R010N100	●	0.1	3	3	10	2.85	60	6	5.5	4	1	10.4	10.8	11.6	12.5
VFRPSRBD0300R010N150	●	0.1	3	3	15	2.85	60	6	4.2	4	1	15.6	16.1	17.3	18.7
VFRPSRBD0300R020N100	●	0.2	3	3	10	2.85	60	6	5.5	4	1	10.4	10.8	11.6	12.5
VFRPSRBD0300R020N150	●	0.2	3	3	15	2.85	60	6	4.2	4	1	15.6	16.1	17.3	18.7
VFRPSRBD0300R020N200	●	0.2	3	3	20	2.85	60	6	3.4	4	1	20.7	21.5	23.1	24.9
VFRPSRBD0300R030N100	●	0.3	3	3	10	2.85	60	6	5.6	4	1	10.4	10.8	11.5	12.5
VFRPSRBD0300R030N150	●	0.3	3	3	15	2.85	60	6	4.2	4	1	15.6	16.1	17.3	18.7
VFRPSRBD0300R030N200	●	0.3	3	3	20	2.85	60	6	3.4	4	1	20.7	21.5	23	24.9
VFRPSRBD0300R050N100	●	0.5	3	3	10	2.85	60	6	5.6	4	1	10.4	10.7	11.5	12.4
VFRPSRBD0300R050N150	●	0.5	3	3	15	2.85	60	6	4.2	4	1	15.6	16.1	17.3	18.6
VFRPSRBD0300R050N200	●	0.5	3	3	20	2.85	60	6	3.4	4	1	20.7	21.4	23	24.8
VFRPSRBD0300R100N100	●	1	3	3	10	2.85	60	6	5.8	4	1	10.4	10.7	11.4	12.3
VFRPSRBD0300R100N150	●	1	3	3	15	2.85	60	6	4.3	4	1	15.5	16.1	17.2	18.5
VFRPSRBD0300R100N200	●	1	3	3	20	2.85	60	6	3.5	4	1	20.7	21.4	22.9	24.7
VFRPSRBD0400R010N120	●	0.1	4	4	12	3.85	60	6	3.6	4	1	12.5	12.9	13.9	15
VFRPSRBD0400R010N200	●	0.1	4	4	20	3.85	60	6	2.4	4	1	20.7	21.5	23.1	*
VFRPSRBD0400R020N120	●	0.2	4	4	12	3.85	60	6	3.7	4	1	12.5	12.9	13.9	15
VFRPSRBD0400R020N200	●	0.2	4	4	20	3.85	60	6	2.4	4	1	20.7	21.5	23.1	*
VFRPSRBD0400R030N120	●	0.3	4	4	12	3.85	60	6	3.7	4	1	12.5	12.9	13.8	15
VFRPSRBD0400R030N200	●	0.3	4	4	20	3.85	60	6	2.4	4	1	20.7	21.5	23	*

2/3

* No interference

VFRPSRB – CORNER RADIUS, SHORT CUT LENGTH, LONG NECK

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCONMS	B2	ZEFP	Type	Effective length for inclined angle			
												30°	1°	2°	3°
VFRPSRBD0400R030N300	●	0.3	4	4	30	3.85	70	6	1.7	4	1	31.1	32.2	*	*
VFRPSRBD0400R050N120	●	0.5	4	4	12	3.85	60	6	3.7	4	1	12.5	12.9	13.8	14.9
VFRPSRBD0400R050N200	●	0.5	4	4	20	3.85	60	6	2.5	4	1	20.7	21.4	23	*
VFRPSRBD0400R050N300	●	0.5	4	4	30	3.85	70	6	1.7	4	1	31.1	32.1	*	*
VFRPSRBD0400R100N120	●	1	4	4	12	3.85	60	6	3.8	4	1	12.4	12.8	13.7	14.8
VFRPSRBD0400R100N200	●	1	4	4	20	3.85	60	6	2.5	4	1	20.7	21.4	22.9	*
VFRPSRBD0400R100N300	●	1	4	4	30	3.85	70	6	1.7	4	1	31.1	32.1	*	*
VFRPSRBD0500R050N150	●	0.5	5	5	15	4.85	60	6	1.7	4	1	15.6	16.1	*	*
VFRPSRBD0500R100N150	●	1	5	5	15	4.85	60	6	1.8	4	1	15.5	16.1	*	*
VFRPSRBD0600R010N180	●	0.1	6	9	18	5.85	70	6	—	4	2	*	*	*	*
VFRPSRBD0600R020N180	●	0.2	6	9	18	5.85	70	6	—	4	2	*	*	*	*
VFRPSRBD0600R030N180	●	0.3	6	9	18	5.85	70	6	—	4	2	*	*	*	*
VFRPSRBD0600R050N180	●	0.5	6	9	18	5.85	70	6	—	4	2	*	*	*	*
VFRPSRBD0600R100N180	●	1	6	9	18	5.85	70	6	—	4	2	*	*	*	*
VFRPSRBD0600R200N180	●	2	6	9	18	5.85	70	6	—	4	2	*	*	*	*
VFRPSRBD0800R020N240	●	0.2	8	12	24	7.85	90	8	—	4	2	*	*	*	*
VFRPSRBD0800R030N240	●	0.3	8	12	24	7.85	90	8	—	4	2	*	*	*	*
VFRPSRBD0800R050N240	●	0.5	8	12	24	7.85	90	8	—	4	2	*	*	*	*
VFRPSRBD0800R100N240	●	1	8	12	24	7.85	90	8	—	4	2	*	*	*	*
VFRPSRBD0800R200N240	●	2	8	12	24	7.85	90	8	—	4	2	*	*	*	*
VFRPSRBD1000R030N300	●	0.3	10	15	30	9.7	100	10	—	4	2	*	*	*	*
VFRPSRBD1000R050N300	●	0.5	10	15	30	9.7	100	10	—	4	2	*	*	*	*
VFRPSRBD1000R100N300	●	1	10	15	30	9.7	100	10	—	4	2	*	*	*	*
VFRPSRBD1000R200N300	●	2	10	15	30	9.7	100	10	—	4	2	*	*	*	*
VFRPSRBD1000R300N300	●	3	10	15	30	9.7	100	10	—	4	2	*	*	*	*
VFRPSRBD1200R050N360	●	0.5	12	18	36	11.7	110	12	—	4	2	*	*	*	*
VFRPSRBD1200R100N360	●	1	12	18	36	11.7	110	12	—	4	2	*	*	*	*
VFRPSRBD1200R200N360	●	2	12	18	36	11.7	110	12	—	4	2	*	*	*	*
VFRPSRBD1200R300N360	●	3	12	18	36	11.7	110	12	—	4	2	*	*	*	*

3/3

* No interference

VFRPSRB

RECOMMENDED CUTTING CONDITIONS

Material	DC	RE	LU	n	f	ap	ae
H Hardned steel (45 – 55HRC)	0.5	0.05	2	25000	1000	0.005	0.1
	0.5	0.1	2	25000	1000	0.008	0.1
	0.6	0.05	2	21000	1000	0.005	0.1
	0.6	0.1	2	21000	1000	0.008	0.1
	0.6	0.1	4	18000	890	0.006	0.1
	0.6	0.2	2	24000	1100	0.01	0.1
	0.8	0.05	4	16000	760	0.015	0.12
	0.8	0.1	4	16000	760	0.02	0.12
	0.8	0.2	4	20000	950	0.03	0.12
	0.8	0.3	4	20000	950	0.03	0.12
	1	0.05	4	13000	1000	0.015	0.15
	1	0.1	4	13000	1000	0.02	0.15
	1	0.1	6	11000	890	0.015	0.12
	1	0.2	4	16000	1300	0.03	0.15
	1	0.2	6	13000	1000	0.02	0.12
	1	0.3	4	16000	1300	0.03	0.15
	1	0.4	4	16000	1300	0.04	0.15
	1.5	0.1	4	14000	1700	0.025	0.23
	1.5	0.1	6	11000	1400	0.025	0.18
	1.5	0.1	10	11000	1400	0.025	0.18
	1.5	0.2	4	14000	1700	0.05	0.23
	1.5	0.2	6	11000	1400	0.05	0.18
	1.5	0.2	10	11000	1400	0.05	0.18
	1.5	0.3	4	16000	1900	0.075	0.23
	1.5	0.3	6	13000	1500	0.075	0.18
	1.5	0.3	10	13000	1500	0.075	0.18
	1.5	0.5	4	16000	1900	0.08	0.23
	1.5	0.5	6	13000	1500	0.08	0.18
	1.5	0.5	10	13000	1500	0.08	0.18
	2	0.1	6	11000	1700	0.025	0.3
	2	0.1	10	8600	1400	0.025	0.24
	2	0.1	15	6400	1000	0.02	0.18
	2	0.2	6	11000	1700	0.055	0.3
	2	0.2	10	8600	1400	0.055	0.24
	2	0.2	15	6400	1000	0.04	0.18
	2	0.3	6	12000	1900	0.08	0.3
	2	0.3	10	9500	1500	0.08	0.24
	2	0.3	15	7200	1100	0.065	0.18
	2	0.3	20	7200	1100	0.065	0.18
	2	0.5	6	12000	1900	0.085	0.3
	2	0.5	10	9500	1500	0.085	0.24
	2	0.5	15	7200	1100	0.07	0.18
	2	0.5	20	7200	1100	0.07	0.18
	2.5	0.3	8	9500	1900	0.08	0.38
	2.5	0.3	15	7600	1500	0.08	0.3
	2.5	0.5	8	9500	1900	0.09	0.38

VFRPSRB

Material	DC	RE	LU	n	f	ap	ae
H Hardned steel (45 – 55HRC)	2.5	0.5	15	7600	1500	0.09	0.3
	2.5	1	8	9500	1900	0.15	0.33
	3	0.1	10	8100	1900	0.025	0.6
	3	0.1	15	6500	1600	0.025	0.48
	3	0.2	10	8100	1900	0.055	0.6
	3	0.2	15	6500	1600	0.055	0.48
	3	0.2	20	6500	1600	0.055	0.48
	3	0.3	10	9000	2200	0.085	0.6
	3	0.3	15	7200	1700	0.085	0.48
	3	0.3	20	7200	1700	0.085	0.48
	3	0.5	10	9000	2200	0.09	0.6
	3	0.5	15	7200	1700	0.09	0.48
	3	0.5	20	7200	1700	0.09	0.48
	3	1	10	9000	2200	0.15	0.54
	3	1	15	7200	1700	0.15	0.43
	3	1	20	7200	2000	0.15	0.43
	4	0.1	12	6100	1700	0.25	0.8
	4	0.1	20	4900	1400	0.25	0.6
	4	0.2	12	6100	1700	0.055	0.8
	4	0.2	20	4900	1400	0.055	0.6
	4	0.3	12	6800	1900	0.085	0.8
	4	0.3	20	5400	1500	0.085	0.6
	4	0.3	30	4100	1100	0.065	0.5
	4	0.5	12	6800	1900	0.09	0.8
	4	0.5	20	5400	1500	0.09	0.65
	4	0.5	30	4100	1100	0.075	0.5
	4	1	12	6800	1900	0.15	0.7
	4	1	20	5400	1500	0.15	0.55
	4	1	30	4100	1100	0.1	0.4
	5	0.5	15	6400	1800	0.1	1.3
	5	1	15	6400	1800	0.15	1.1
	6	0.1	18	4800	1500	0.03	1.5
	6	0.2	18	4800	1500	0.06	1.5
	6	0.3	18	5300	1700	0.09	1.5
	6	0.5	18	5300	1700	0.1	1.5
	6	1	18	5300	1700	0.15	1.4
	6	2	18	5300	1700	0.3	1.3
	8	0.2	24	3600	1100	0.06	2
	8	0.3	24	4000	1300	0.09	2
	8	0.5	24	4000	1300	0.095	2
	8	1	24	4000	1300	0.15	1.8
	8	2	24	4000	1300	0.3	1.7
	10	0.3	30	3200	1000	0.09	2.5
	10	0.5	30	3200	1000	0.095	2.5
	10	1	30	3200	1000	0.15	2.3
	10	2	30	3200	1000	0.3	2.1
	10	3	30	3200	1000	0.45	1.9
	12	0.5	36	2700	950	0.1	3
	12	1	36	2700	950	0.15	2.7
	12	2	36	2700	950	0.3	2.6
	12	3	36	2700	950	0.45	2.3

VFRPSRB

Material	DC	RE	LU	n	f	ap	ae
H Hardned steel (55 – 65HRC)	0.5	0.05	2	19000	760	0.004	0.08
	0.5	0.1	2	19000	760	0.006	0.08
	0.6	0.05	2	16000	760	0.004	0.08
	0.6	0.1	2	16000	760	0.006	0.08
	0.6	0.1	4	16000	760	0.005	0.08
	0.6	0.2	2	19000	890	0.008	0.08
	0.8	0.05	4	12000	570	0.01	0.1
	0.8	0.1	4	12000	570	0.015	0.1
	0.8	0.2	4	16000	760	0.025	0.1
	0.8	0.3	4	16000	760	0.025	0.1
	1	0.05	4	9500	760	0.01	0.12
	1	0.1	4	9500	760	0.015	0.12
	1	0.1	6	6400	510	0.01	0.1
	1	0.2	4	9500	760	0.025	0.12
	1	0.2	6	6400	510	0.02	0.1
	1	0.3	4	9500	760	0.025	0.12
	1	0.4	4	9500	760	0.03	0.12
	1.5	0.1	4	11000	920	0.015	0.2
	1.5	0.1	6	9200	730	0.015	0.16
	1.5	0.1	10	9200	730	0.015	0.16
	1.5	0.2	4	11000	920	0.035	0.2
	1.5	0.2	6	9200	730	0.035	0.16
	1.5	0.2	10	9200	730	0.035	0.16
	1.5	0.3	4	13000	1000	0.05	0.2
	1.5	0.3	6	10000	810	0.05	0.16
	1.5	0.3	10	10000	810	0.05	0.16
	1.5	0.5	4	13000	1000	0.055	0.2
	1.5	0.5	6	10000	810	0.055	0.16
	1.5	0.5	10	10000	810	0.055	0.16
	2	0.1	6	8600	1000	0.02	0.28
	2	0.1	10	6900	830	0.02	0.22
	2	0.1	15	5200	620	0.015	0.17
	2	0.2	6	8600	1000	0.035	0.28
	2	0.2	10	6900	830	0.035	0.22
	2	0.2	15	5200	620	0.025	0.17
	2	0.3	6	6900	1100	0.055	0.28
	2	0.3	10	7600	920	0.055	0.22
	2	0.3	15	5700	690	0.045	0.17
	2	0.3	20	5700	690	0.045	0.17
	2	0.5	6	9500	1100	0.06	0.28
	2	0.5	10	7600	920	0.06	0.22
	2	0.5	15	5700	690	0.045	0.17
	2	0.5	20	5700	690	0.045	0.17
	2.5	0.3	8	7600	1400	0.055	0.35
	2.5	0.3	15	6100	1100	0.055	0.28
	2.5	0.5	8	7600	1400	0.06	0.35

VFRPSRB

Material	DC	RE	LU	n	f	ap	ae
H Hardned steel {55 – 65HRC}	2.5	0.5	15	6100	1100	0.06	0.28
	2.5	1	8	7600	1400	0.09	0.31
	3	0.1	10	6500	1200	0.02	0.55
	3	0.1	15	5200	940	0.02	0.44
	3	0.2	10	6500	1200	0.04	0.55
	3	0.2	15	5200	940	0.04	0.44
	3	0.2	20	5200	940	0.04	0.44
	3	0.3	10	7200	1300	0.055	0.55
	3	0.3	15	5800	1000	0.055	0.44
	3	0.3	20	5800	1000	0.055	0.44
	3	0.5	10	7200	1300	0.06	0.55
	3	0.5	15	5800	1000	0.06	0.44
	3	0.5	20	5800	1000	0.06	0.44
	3	1	10	7200	1300	0.1	0.5
	3	1	15	5800	1000	0.1	0.4
	3	1	20	5800	1000	0.1	0.4
	4	0.1	12	4900	970	0.02	0.74
	4	0.1	20	3900	780	0.02	0.6
	4	0.2	12	4900	970	0.04	0.74
	4	0.2	20	3900	780	0.04	0.6
	4	0.3	12	5400	1100	0.055	0.75
	4	0.3	20	4300	870	0.055	0.6
	4	0.3	30	3200	650	0.045	0.45
	4	0.5	12	5400	1100	0.06	0.75
	4	0.5	20	4300	870	0.06	0.6
	4	0.5	30	4300	650	0.05	0.45
	4	1	12	5400	1100	0.1	0.66
	4	1	20	4300	870	0.1	0.53
	4	1	30	3200	650	0.075	0.4
	5	0.5	15	5100	1000	0.065	1.2
	5	1	15	5100	1000	0.1	1
	6	0.1	18	3800	920	0.02	1.4
	6	0.2	18	3800	920	0.04	1.4
	6	0.3	18	4200	1000	0.06	1.4
	6	0.5	18	4200	1000	0.065	1.4
	6	1	18	4200	1000	0.1	1.2
	6	2	18	4200	1000	0.2	1.1
	8	0.2	24	2900	690	0.04	1.8
	8	0.3	24	3200	760	0.06	1.8
	8	0.5	24	3200	760	0.065	1.8
	8	1	24	3200	760	0.1	1.7
	8	2	24	3200	760	0.2	1.6
	10	0.3	30	2500	610	0.06	2.3
	10	0.5	30	2500	610	0.065	2.3
	10	1	30	2500	610	0.1	2.1
	10	2	30	2500	610	0.2	2
	10	3	30	2500	610	0.3	1.7
	12	0.5	36	2100	510	0.065	2.8
	12	1	36	2100	510	0.1	2.5
	12	2	36	2100	510	0.2	2.4
	12	3	36	2100	510	0.3	2.1


VFRPSRB

Material	DC	RE	LU	n	f	ap	ae
H Hardned steel (65 – 70HRC)	0.5	0.05	2	13000	510	0.003	0.08
	0.5	0.1	2	13000	510	0.005	0.08
	0.6	0.05	2	11000	510	0.003	0.08
	0.6	0.1	2	11000	510	0.005	0.08
	0.6	0.1	4	11000	510	0.004	0.08
	0.6	0.2	2	16000	760	0.006	0.08
	0.8	0.05	4	7900	380	0.01	0.1
	0.8	0.1	4	7900	380	0.01	0.1
	0.8	0.2	4	12000	570	0.02	0.1
	0.8	0.3	4	12000	570	0.02	0.1
	1	0.05	4	6400	510	0.01	0.12
	1	0.1	4	6400	510	0.015	0.12
	1	0.1	6	6400	510	0.01	0.1
	1	0.2	4	6400	510	0.02	0.12
	1	0.2	6	6400	510	0.015	0.1
	1	0.3	4	6400	510	0.02	0.12
	1	0.4	4	6400	510	0.025	0.12
	1.5	0.1	4	7200	570	0.01	0.2
	1.5	0.1	6	5700	460	0.01	0.16
	1.5	0.1	10	5700	460	0.01	0.16
	1.5	0.2	4	7200	570	0.025	0.2
	1.5	0.2	6	5700	460	0.025	0.16
	1.5	0.2	10	5700	460	0.025	0.16
	1.5	0.3	4	8000	640	0.035	0.2
	1.5	0.3	6	6400	510	0.035	0.16
	1.5	0.3	10	6400	510	0.035	0.16
	1.5	0.5	4	8000	640	0.04	0.2
	1.5	0.5	6	6400	510	0.04	0.16
	1.5	0.5	10	6400	510	0.04	0.16
	2	0.1	6	5400	640	0.015	0.28
	2	0.1	10	4300	520	0.015	0.22
	2	0.1	15	3200	390	0.01	0.17
	2	0.2	6	5400	640	0.025	0.28
	2	0.2	10	4300	520	0.025	0.22
	2	0.2	15	3200	390	0.02	0.16
	2	0.3	6	6000	420	0.04	0.27
	2	0.3	10	4800	570	0.04	0.22
	2	0.3	15	3600	430	0.03	0.16
	2	0.3	20	3600	430	0.03	0.16
	2	0.5	6	6000	720	0.04	0.27
	2	0.5	10	4800	570	0.04	0.22
	2	0.5	15	3600	430	0.035	0.16
	2	0.5	20	3600	430	0.035	0.16
	2.5	0.3	8	4800	860	0.04	0.34
	2.5	0.3	15	3800	690	0.04	0.27
	2.5	0.5	8	4800	860	0.04	0.34
	2.5	0.5	15	3800	690	0.04	0.27
	2.5	1	8	4800	860	0.065	0.31
	3	0.1	10	4100	730	0.015	0.55
	3	0.1	15	3200	580	0.015	0.44
	3	0.2	10	4100	730	0.025	0.55

VFRPSRB

Material	DC	RE	LU	n	f	ap	ae
H Hardned steel (65 – 70HRC)	3	0.2	15	3200	580	0.025	0.44
	3	0.2	20	3200	580	0.025	0.44
	3	0.3	10	4500	810	0.04	0.55
	3	0.3	15	3600	650	0.04	0.44
	3	0.3	20	3600	650	4	0.44
	3	0.5	10	4500	810	0.045	0.55
	3	0.5	15	3600	650	0.045	0.44
	3	0.5	20	3600	650	0.045	0.44
	3	1	10	4500	810	0.07	0.5
	3	1	15	3600	650	0.07	0.4
	3	1	20	3600	650	0.07	0.4
	4	0.1	12	3000	610	0.015	0.73
	4	0.1	20	2400	490	0.015	0.58
	4	0.2	12	3000	610	0.025	0.73
	4	0.2	20	2400	490	0.025	0.58
	4	0.3	12	3400	680	0.04	0.73
	4	0.3	20	2700	540	0.04	0.58
	4	0.3	30	2000	410	0.035	0.44
	4	0.5	12	3400	680	0.045	0.74
	4	0.5	20	2700	540	0.045	0.58
	4	0.5	30	2000	410	0.035	0.44
	4	1	12	3400	680	0.07	0.66
	4	1	20	2700	540	0.07	0.53
	4	1	30	2000	410	0.055	0.4
	5	0.5	15	3200	640	0.045	1.1
	5	1	15	3200	640	0.075	1
	6	0.1	18	2400	570	0.015	1.3
	6	0.2	18	2400	570	0.03	1.3
	6	0.3	18	2700	640	0.045	1.3
	6	0.5	18	2700	640	0.045	1.3
	6	1	18	2700	640	0.075	1.2
	6	2	18	2700	640	0.15	1.1
	8	0.2	24	1800	430	0.03	1.8
	8	0.3	24	2000	480	0.045	1.8
	8	0.5	24	2000	480	0.045	1.8
	8	1	24	2000	480	0.075	1.6
	8	2	24	2000	480	0.15	1.5
	10	0.3	30	1600	380	0.045	2.3
	10	0.5	30	1600	380	0.045	2.3
	10	1	30	1600	380	0.075	2
	10	2	30	1600	380	0.15	1.9
	10	3	30	1600	380	0.2	1.7
	12	0.5	36	1300	320	0.05	2.7
	12	1	36	1300	320	0.075	2.4
	12	2	36	1300	320	0.15	2.3
	12	3	36	1300	320	0.2	2

6/6




1. When the inclination angle of machined surface is large, or machining with large cutting load such as in corners, reduce the revolution and feed rate.
2. If the depth of cut is shallow, the revolution and feed rate can be increased.
3. Cutting conditions may differ considerably due to the tool overhang, depth of cut and machine tool condition. Please use the table above as a reference starting point.

VFRSDRB



CONNER RADIUS, SHORT CUT LENGTH, 6 FLUTE

H

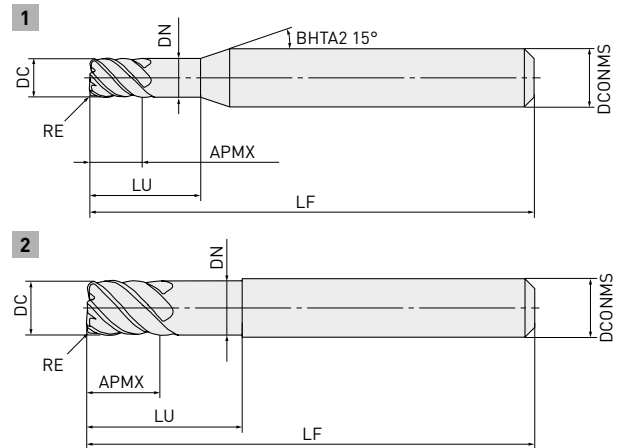

DC

0
- 0.020

DCONMS = 6 DCONMS = 8, 10 DCONMS = 12

0 0 0
- 0.005 - 0.006 - 0.008

- A sharp cutting edge and improved chipping resistance enables highly efficient machining.

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCONMS	ZEFP	Type
VFRSDRBD0300R030	●	0.3	3	3	9	2.9	45	6	6	1
VFRSDRBD0400R030	●	0.3	4	4	12	3.9	45	6	6	1
VFRSDRBD0500R030	●	0.3	5	5	15	4.9	50	6	6	1
VFRSDRBD0600R030	●	0.3	6	6	18	5.85	50	6	6	2
VFRSDRBD0600R050	●	0.5	6	6	18	5.85	50	6	6	2
VFRSDRBD0600R100	●	1	6	6	18	5.85	50	6	6	2
VFRSDRBD0800R030	●	0.3	8	8	24	7.85	60	8	6	2
VFRSDRBD0800R050	●	0.5	8	8	24	7.85	60	8	6	2
VFRSDRBD0800R100	●	1	8	8	24	7.85	60	8	6	2
VFRSDRBD1000R050	●	0.5	10	10	30	9.7	70	10	6	2
VFRSDRBD1000R100	●	1	10	10	30	9.7	70	10	6	2
VFRSDRBD1200R050	●	0.5	12	12	36	11.7	75	12	6	2
VFRSDRBD1200R100	●	1	12	12	36	11.7	75	12	6	2


1/1

VFRSDRB

RECOMMENDED CUTTING CONDITIONS


Material	DC	n	f	ae
H Hardened steel (45 – 55 HRC)	3	32000	3800	0.2
	4	24000	4400	0.2
	6	16000	5800	0.3
	8	12000	5800	0.4
	10	9600	5800	0.5
	12	8000	4800	0.6

1/1



Material	DC	n	f	ae
H Hardened steel (55 – 62 HRC)	3	16000	1900	0.1
	4	12000	2200	0.1
	6	8000	2900	0.2
	8	6000	2900	0.2
	10	4800	2900	0.3
	12	4000	2400	0.3
H Hardened steel (62 – 70 HRC)	3	11000	1200	0.05
	4	8000	1300	0.05
	6	5300	1800	0.10
	8	4000	1800	0.10
	10	3200	1800	0.20
	12	2700	1500	0.20

1/1



1. If the depth of cut is shallow, the revolution and feed rate can be increased.
2. If the machine or workpiece material is not rigid, vibration or abnormal noises may occur.
In this case, please adjust the spindle speed, feed rate and depth of cut according to the table above.

VFRMDRBD



45°




CONNER RADIUS, MEDIUM CUT LENGTH, 6 FLUTE


H




1

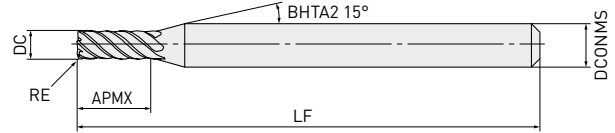

2

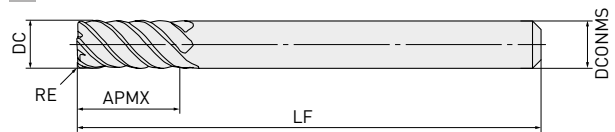

3

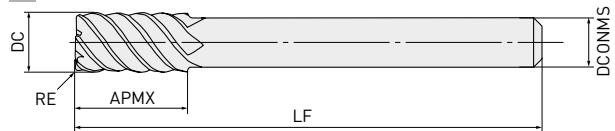

DC≤12	DC≥12		
0	0		
- 0.020	- 0.030		
DCONMS= 6	DCONMS=8, 10	DCONMS=12, 16	DCONMS=20
0	0	0	0
- 0.005	- 0.006	- 0.008	- 0.009

- A sharp cutting edge and improved chipping resistance enables highly efficient machining.

Order number	Stock	RE	DC	APMX	LF	DCONMS	ZEFP	Type
VFRMDRBD0300R030	●	0.3	3	10	60	6	6	1
VFRMDRBD0400R030	●	0.3	4	12	60	6	6	1
VFRMDRBD0500R030	●	0.3	5	15	60	6	6	1
VFRMDRBD0600R030	●	0.3	6	15	60	6	6	2
VFRMDRBD0600R050	●	0.5	6	15	60	6	6	2
VFRMDRBD0600R100	●	1	6	15	60	6	6	2
VFRMDRBD0800R030	●	0.3	8	20	75	8	6	2
VFRMDRBD0800R050	●	0.5	8	20	75	8	6	2
VFRMDRBD0800R100	●	1	8	20	75	8	6	2
VFRMDRBD1000R030	●	0.3	10	25	80	10	6	2
VFRMDRBD1000R050	●	0.5	10	25	80	10	6	2
VFRMDRBD1000R100	●	1	10	25	80	10	6	2
VFRMDRBD1200R050	●	0.5	12	30	100	12	6	2
VFRMDRBD1200R100	●	1	12	30	100	12	6	2
VFRMDRBD1600R100	●	1	16	40	110	16	6	2
VFRMDRBD1600R150	★	1.5	16	40	110	16	6	2
VFRMDRBD1800R100	★	1	18	40	120	16	6	3
VFRMDRBD1800R150	★	1.5	18	40	120	16	6	3
VFRMDRBD2000R100	★	1	20	45	125	20	6	2
VFRMDRBD2000R150	★	1.5	20	45	125	20	6	2
VFRMDRBD2000R200	★	2	20	45	125	20	6	2


1/1

VFRMDRB

RECOMMENDED CUTTING CONDITIONS


Material	DC	n	f	ae
H Hardened steel (45 – 55 HRC)	3	32000	3800	0.2
	4	24000	4400	0.2
	6	16000	5800	0.3
	8	12000	5800	0.4
	10	9600	5800	0.5
	12	8000	4800	0.6
	16	6000	3600	0.8
	20	4800	2900	1.0

1/1




Material	DC	n	f	ae
H Hardened steel (55 – 62 HRC)	3	16000	1900	0.1
	4	12000	2200	0.1
	6	8000	2900	0.2
	8	6000	2900	0.2
	10	4800	2900	0.3
	12	4000	2400	0.3
	16	3000	1800	0.5
	20	2400	1400	0.5
H Hardened steel (62 – 70 HRC)	3	11000	1200	0.05
	4	8000	1300	0.05
	6	5300	1800	0.10
	8	4000	1800	0.10
	10	3200	1800	0.20
	12	2700	1500	0.20
	16	2000	1100	0.30
	20	1600	880	0.30

1/1




1. If the depth of cut is shallow, the revolution and feed rate can be increased.
2. If the machine or workpiece material is not rigid, vibration or abnormal noises may occur.
In this case, please adjust the spindle speed, feed rate and depth of cut according to the table above.

VFR2MV



END MILL, MEDIUM CUT LENGTH, 2 FLUTE, IRREGULAR HELIX FLUTES

P H

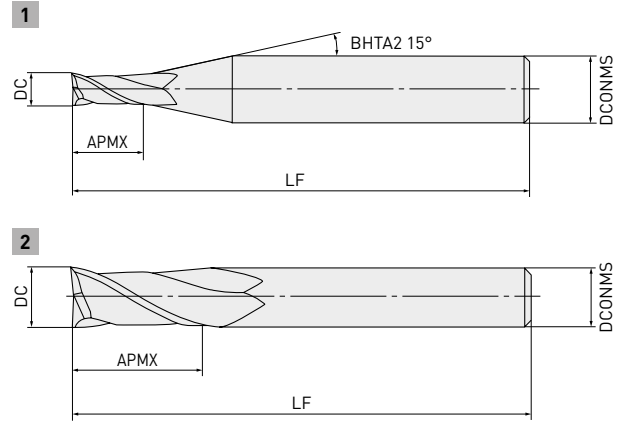

	DC
	0
	- 0.020
	DCONMS = 6
	0
	- 0.005

- Irregular helix angle and flute pitch, combined with a highly rigid centre suppresses chatter and vibration.

Order number	Stock	DC	APMX	LF	DCONMS	ZEFP	Type
VFR2MVD0050	●	0.5	1.3	40	4	2	1
VFR2MVD0100	●	1	2.5	40	4	2	1
VFR2MVD0150	●	1.5	3.8	40	4	2	1
VFR2MVD0200	●	2	5	40	4	2	1
VFR2MVD0250	●	2.5	6.3	40	4	2	1
VFR2MVD0300	●	3	7.5	50	6	2	1
VFR2MVD0400	●	4	10	50	6	2	1
VFR2MVD0500	●	5	12.5	50	6	2	1
VFR2MVD0600	●	6	15	50	6	2	2

1/1



VFR2MV

RECOMMENDED CUTTING CONDITIONS

Material	DC	n	f	ae/ap
P Pre-hardened steel (35 – 45 HRC) Carbon steel	0.5	40000	1000	0.015
	1.0	40000	2000	0.06
	1.5	40000	3000	0.12
	2.0	30000	3000	0.18
	2.5	24000	2600	0.25
	3.0	20000	2300	0.30
	4.0	15000	2000	0.40
	5.0	12000	1600	0.50
	6.0	10000	1400	0.60
H Hardened steel (45 – 55 HRC)	0.5	40000	960	0.015
	1.0	32000	1600	0.06
	1.5	32000	1900	0.08
	2.0	24000	1900	0.10
	2.5	19000	1600	0.13
	3.0	16000	1400	0.15
	4.0	12000	1200	0.20
	5.0	9000	900	0.25
	6.0	7000	700	0.30
H Hardened steel (55 – 62 HRC)	0.5	30000	600	0.01
	1.0	16000	550	0.05
	1.5	10600	500	0.08
	2.0	8100	400	0.10
	2.5	6400	350	0.13
	3.0	5400	300	0.15
	4.0	4000	240	0.20
	5.0	3200	190	0.20
	6.0	2700	160	0.20
H Hardened steel (62 – 70 HRC)	0.5	19100	260	0.01
	1.0	9600	180	0.01
	1.5	6400	160	0.05
	2.0	4800	120	0.08
	2.5	3800	100	0.08
	3.0	3200	90	0.08
	4.0	2400	80	0.10
	5.0	1900	70	0.10
	6.0	1600	60	0.10

1/1



1. When slotting, reduce the revolutions by 50 – 70 % and the feed rate by 40 – 60 %.
2. If the depth of cut is shallow, the revolution and feed rate can be increased.
3. Vibration damping end mills are more effective in suppressing chatter and vibration compared to general end mills, but may still occur if the rigidity of the machine or the workpiece material is low. In this case, please adjust the spindle speed, feed rate and depth of cut according to the table above.

VFR4MV




35°



38°

END MILL, MEDIUM CUT LENGTH, 4 FLUTE, IRREGULAR
HELIX FLUTES

P H

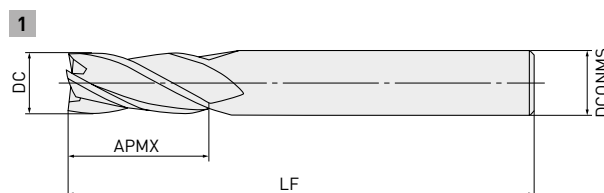

DC ≤ 12	DC > 12
0	0
- 0.020	- 0.030



DCONMS = 6	DCONMS = 8, 10	DCONMS = 12, 16	DCONMS = 20
0	0	0	0
- 0.005	- 0.006	- 0.008	- 0.009

- Irregular helix angle and flute pitch, combined with a highly rigid centre suppresses chatter and vibration.

Order number	Stock	DC	APMX	LF	DCONMS	ZEFP	Type
VFR4MVD0600	●	6	15	50	6	4	1
VFR4MVD0800	●	8	20	60	8	4	1
VFR4MVD1000	●	10	25	70	10	4	1
VFR4MVD1200	●	12	30	90	12	4	1
VFR4MVD1600	★	16	40	100	16	4	1
VFR4MVD2000	●	20	50	110	20	4	1


1/1

VFR4MV

RECOMMENDED CUTTING CONDITIONS

Material	DC	n	f	ae/ap
P Pre-hardened steel (35 – 45 HRC) Carbon steel	6	10000	2100	0.6
	8	8000	1500	0.8
	10	6400	1400	1.0
	12	5400	1200	1.0
	16	2400	550	3.0
	20	1900	480	4.0
H Hardened steel (45 – 55 HRC)	6	7000	1400	0.3
	8	5600	1100	0.4
	10	4500	950	0.5
	12	3800	860	0.5
	16	1200	280	0.8
	20	1000	240	1.0
H Hardened steel (55 – 62 HRC)	6	2700	320	0.2
	8	2000	240	0.2
	10	1600	210	0.3
	12	1300	160	0.3
	16	1000	130	0.3
	20	800	100	0.3
H Hardened steel (62 – 70 HRC)	6	1600	130	0.1
	8	1200	100	0.1
	10	960	80	0.2
	12	800	60	0.2
	16	600	50	0.2
	20	480	40	0.2

1/1



1. When slotting, reduce the revolutions by 50 – 70 % and the feed rate by 40 – 60 %.
2. If the depth of cut is shallow, the revolution and feed rate can be increased.
3. Vibration damping end mills are more effective in suppressing chatter and vibration compared to general end mills, but may still occur if the rigidity of the machine or the workpiece material is low. In this case, please adjust the spindle speed, feed rate and depth of cut according to the table above.

VFRSD



DC<3


DC>3

END MILL, SHORT CUT LENGTH, 4/6 FLUTE


H



1

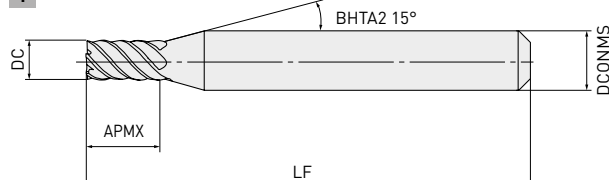

2

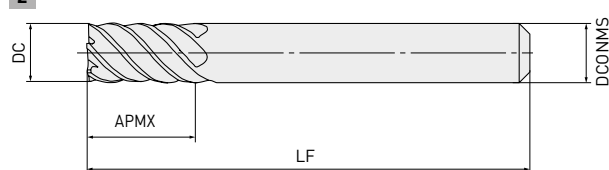

DC

0
- 0.020

DCONMS=6

DCONMS=8, 10

DCONMS=12

0
- 0.0050
- 0.0060
- 0.008

- A sharp cutting edge and improved chipping resistance enables highly efficient machining.

Order number	Stock	DC	APMX	LF	DCONMS	ZEFP	Type
VFRSDD0100	●	1	2	45	6	4	1
VFRSDD0150	●	1.5	3	45	6	4	1
VFRSDD0200	●	2	4	45	6	4	1
VFRSDD0250	●	2.5	5	45	6	4	1
VFRSDD0300	●	3	6	45	6	6	1
VFRSDD0350	●	3.5	7	45	6	6	1
VFRSDD0400	●	4	8	45	6	6	1
VFRSDD0500	●	5	10	50	6	6	1
VFRSDD0600	●	6	12	50	6	6	2
VFRSDD0800	●	8	16	60	8	6	2
VFRSDD1000	●	10	20	70	10	6	2
VFRSDD1200	●	12	24	75	12	6	2

1/1

1. FHA: DC<3 mm = 30°, DC≥3 mm = 45°




VFRSD

RECOMMENDED CUTTING CONDITIONS


Material	DC	n	f	ae
H Hardened steel (45 – 55 HRC)	1	40000	1200	0.05
	2	40000	2000	0.10
	3	32000	3800	0.20
	4	24000	4400	0.20
	6	16000	5800	0.30
	8	12000	5800	0.40
	10	9600	5800	0.50
	12	8000	4800	0.60

1/1



Material	DC	n	f	ae
Hardened steel (55 – 62 HRC)	1	40000	800	0.03
	2	24000	1000	0.05
	3	16000	1900	0.10
	4	12000	2200	0.10
	6	8000	2900	0.20
	8	6000	2900	0.20
	10	4800	2900	0.30
	12	4000	2400	0.30
H Hardened steel (62 – 70 HRC)	1	32000	500	0.02
	2	16000	600	0.05
	3	11000	1200	0.05
	4	8000	1300	0.05
	6	5300	1800	0.10
	8	4000	1800	0.10
	10	3200	1800	0.20
	12	2700	1500	0.20

1/1




1. If the depth of cut is shallow, the revolution and feed rate can be increased.
2. If the machine or workpiece material is not rigid, vibration or abnormal noises may occur. In this case, please adjust the spindle speed, feed rate and depth of cut according to the table above.

VFRSD

SLOT MILLING WITH SMALL DIAMETER TOOLS

Material		DC	n	f	ap
H	Hardened steel (45 – 55 HRC)	1	15000	300	0.1
		2	8000	320	0.2
	Hardened steel (55 – 62 HRC)	1	9500	110	0.05
		2	4800	190	0.10
1/1					



1. If the depth of cut is shallow, the revolution and feed rate can be increased.
2. If the machine or workpiece material is not rigid, vibration or abnormal noises may occur. In this case, please adjust the spindle speed, feed rate and depth of cut according to the table above.

VFRMD




DC<3

DC≥3

END MILL, MEDIUM CUT LENGTH, 4/6 FLUTE

H

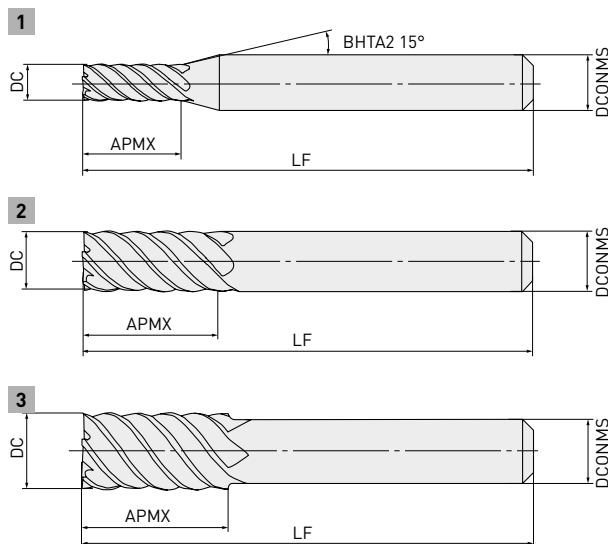

DC≤12	DC>12
0	0
- 0.020	- 0.030



DCONMS=6	DCONMS=8, 10	DCONMS=12, 16	DCONMS=20, 25
0	0	0	0
- 0.005	- 0.006	- 0.008	- 0.009

- A sharp cutting edge and improved chipping resistance enables highly efficient machining.

Order number	Stock	DC	APMX	LF	DCONMS	ZEFP	Type
VFRMDD0100	●	1	3.5	60	6	4	1
VFRMDD0150	●	1.5	5	60	6	4	1
VFRMDD0200	●	2	7	60	6	4	1
VFRMDD0250	●	2.5	8	60	6	4	1
VFRMDD0300	●	3	10	60	6	6	1
VFRMDD0400	●	4	12	60	6	6	1
VFRMDD0500	●	5	15	60	6	6	1
VFRMDD0600	●	6	15	60	6	6	2
VFRMDD0800	●	8	20	75	8	6	2
VFRMDD1000	●	10	25	80	10	6	2
VFRMDD1200	●	12	30	100	12	6	2
VFRMDD1400	★	14	35	105	12	6	3
VFRMDD1500	★	15	40	110	16	6	1
VFRMDD1600	★	16	40	110	16	6	2
VFRMDD1800	★	18	40	120	16	6	3
VFRMDD2000	★	20	45	125	20	6	2
VFRMDD2200	★	22	45	135	20	6	3
VFRMDD2500	★	25	60	160	25	6	2

1/1

1. FHA: DC < 3 mm = 30°, DC ≥ 3 mm = 45°




VFRMD

RECOMMENDED CUTTING CONDITIONS


Material	DC	n	f	ae
H Hardened steel (45 – 55 HRC)	1	40000	1200	0.05
	2	40000	2000	0.10
	3	32000	3800	0.20
	4	24000	4400	0.20
	6	16000	5800	0.30
	8	12000	5800	0.40
	10	9600	5800	0.50
	12	8000	4800	0.60
	16	6000	3600	0.80
	20	4800	2900	1.00
	25	3800	2300	1.00

1/1



Material	DC	n	f	ae
H Hardened steel (55 – 62 HRC)	1	40000	800	0.03
	2	24000	1000	0.05
	3	16000	1900	0.10
	4	12000	2200	0.10
	6	8000	2900	0.20
	8	6000	2900	0.20
	10	4800	2900	0.30
	12	4000	2400	0.30
	16	3000	1800	0.50
	20	2400	1400	0.50
	25	1900	1100	0.50
H Hardened steel (62 – 70 HRC)	1	32000	500	0.02
	2	16000	600	0.05
	3	11000	1200	0.05
	4	8000	1300	0.05
	6	5300	1800	0.10
	8	4000	1800	0.10
	10	3200	1800	0.20
	12	2700	1500	0.20
	16	2000	1100	0.30
	20	1600	880	0.30
	25	1300	720	0.30

1/1




1. If the depth of cut is shallow, the revolution and feed rate can be increased.
2. If the machine or workpiece material is not rigid, vibration or abnormal noises may occur. In this case, please adjust the spindle speed, feed rate and depth of cut according to the table above.

VFRMD

SLOT MILLING WITH SMALL DIAMETER TOOLS

Material		DC	n	f	ap
H	Hardened steel (45 – 55 HRC)	1	15000	300	0.1
		2	8000	320	0.2
	Hardened steel (55 – 62 HRC)	1	9500	110	0.05
		2	4800	190	0.10
1/1					



1. If the depth of cut is shallow, the revolution and feed rate can be increased.
2. If the machine or workpiece material is not rigid, vibration or abnormal noises may occur. In this case, please adjust the spindle speed, feed rate and depth of cut according to the table above.

VFRLD




END MILL, LONG CUT LENGTH, 6 FLUTE

H



1



DC ≤ 12	DC > 12
0	0
- 0.020	- 0.030



DCONMS = 6	DCONMS = 8, 10	DCONMS = 12, 16	DCONMS = 20, 25
0	0	0	0
- 0.005	- 0.006	- 0.008	- 0.009

- A sharp cutting edge and improved chipping resistance enables highly efficient machining.

Order number	Stock	DC	APMX	LF	DCONMS	ZEFP	Type
VFRLDD0600	●	6	26	70	6	6	1
VFRLDD0800	●	8	36	90	8	6	1
VFRLDD1000	●	10	46	100	10	6	1
VFRLDD1200	●	12	56	110	12	6	1
VFRLDD1600	●	16	66	130	16	6	1
VFRLDD2000	★	20	76	140	20	6	1
VFRLDD2500	★	25	92	180	25	6	1


1/1

VFRLD

RECOMMENDED CUTTING CONDITIONS


Material	DC	n	f	ae
H Hardened steel (45 – 55 HRC)	6	2200	460	0.06
	8	1700	430	0.08
	10	1300	400	0.10
	12	1100	360	0.12
	16	840	310	0.16
	20	670	260	0.20
	25	530	230	0.25

1/1



Material	DC	n	f	ae
H Hardened steel (55 – 62 HRC)	6	1900	340	0.03
	8	1400	320	0.04
	10	1100	310	0.05
	12	930	280	0.06
	16	700	220	0.08
	20	560	190	0.10
	25	450	170	0.13
H Hardened steel (62 – 70 HRC)	6	1500	260	0.03
	8	1100	240	0.04
	10	890	210	0.05
	12	740	200	0.06
	16	560	170	0.08
	20	450	150	0.10
	25	360	120	0.13

1/1



1. If the depth of cut is shallow, the revolution and feed rate can be increased.
2. If the machine or workpiece material is not rigid, vibration or abnormal noises may occur. In this case, please adjust the spindle speed, feed rate and depth of cut according to the table above.

VFR4MB



30°




BALL NOSE, MEDIUM CUT LENGTH, 4 FLUTE


H



1

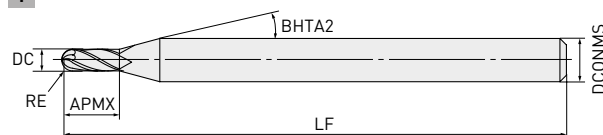

2

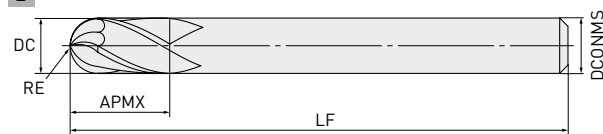

RE

 ± 0.010 

DCONMS = 6	8 ≤ DCONMS ≤ 10	DCONMS = 12
0	0	0
- 0.008	- 0.009	- 0.011

- The 4 flute geometry with a cutting edge extending to the centre achieves a long tool life and enables high efficiency machining.

Order number	Stock	RE	DC	APMX	LF	BHTA2	DCONMS	ZEFP	Type
VFR4MBR0050	●	0.5	1	2.5	50	15	6	4	1
VFR4MBR0100	●	1	2	6	60	15	6	4	1
VFR4MBR0150	●	1.5	3	8	70	15	6	4	1
VFR4MBR0200	●	2	4	8	70	15	6	4	1
VFR4MBR0250	●	2.5	5	12	80	15	6	4	1
VFR4MBR0300	●	3	6	12	80	—	6	4	2
VFR4MBR0400	●	4	8	14	90	—	8	4	2
VFR4MBR0500	●	5	10	18	100	—	10	4	2
VFR4MBR0600	●	6	12	22	110	—	12	4	2

1/1




VFR4MB


RECOMMENDED CUTTING CONDITIONS

Material	RE	$\alpha \leq 15^\circ$		$\alpha > 15^\circ$		ap	ae
		n	f	n	f		
Hardened steel (45 – 55 HRC)	0.5	40000	8000	40000	3800	0.06	0.10
	1.0	40000	9600	40000	5600	0.11	0.20
	1.5	40000	12000	32000	5600	0.13	0.30
	2.0	32000	11000	24000	4700	0.15	0.40
	2.5	25000	9000	19000	3800	0.20	0.50
	3.0	21000	8400	15000	3400	0.25	0.60
	4.0	16000	6400	12000	2600	0.30	0.80
	5.0	13000	5200	9600	2200	0.50	1.00
	6.0	9000	3600	7200	1700	0.50	1.20
H Hardened steel (55 – 65 HRC)	0.5	40000	5600	40000	3100	0.05	0.10
	1.0	40000	8000	28000	3100	0.10	0.20
	1.5	32000	7700	19000	2900	0.12	0.30
	2.0	24000	6200	14000	2500	0.13	0.40
	2.5	19000	5300	12000	2200	0.15	0.50
	3.0	16000	4800	9600	2000	0.20	0.60
	4.0	12000	3600	7200	1600	0.20	0.80
	5.0	10000	3200	5800	1300	0.20	1.00
	6.0	7000	2200	4300	940	0.30	1.20
Hardened steel (65 – 70 HRC)	0.5	40000	4700	32000	1700	0.03	0.10
	1.0	24000	5000	16000	1200	0.06	0.20
	1.5	16000	4200	11000	1100	0.07	0.30
	2.0	12000	3100	8000	1000	0.08	0.40
	2.5	9600	2700	6000	780	0.08	0.50
	3.0	8000	2300	5000	780	0.09	0.60
	4.0	6000	1900	4000	620	0.09	0.80
	5.0	4800	1500	3000	550	0.10	1.00
	6.0	3600	1100	2200	400	0.10	1.20

1/1



1. If the depth of cut is shallow, the revolution and feed rate can be increased.
Please reduce the feed rate when the surface finish is important.
2. If the rigidity of the machine or the workpiece materials installation is very low, or chattering and noise are generated, please adjust the revolution, feed rate and depth of cut accordingly.
3. α is the inclination angle of the machined surface.




ae:Pick Feed

VFR2XLB



BALL NOSE, 2 FLUTE, LONG NECK

H

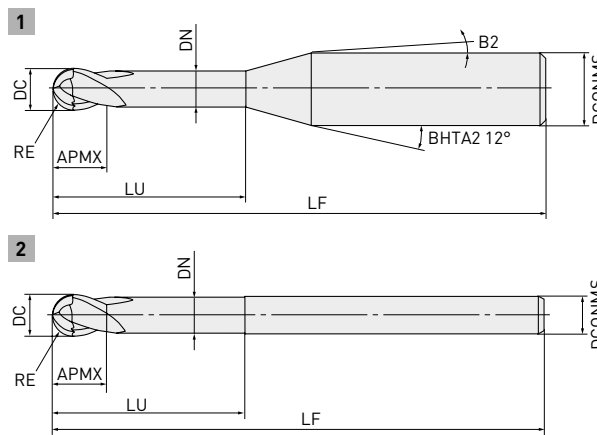

RE ≤ 3


±0.005



4 ≤ DCONMS ≤ 6

0

- 0.005

Effective length
for inclined angle

Inclined angle

- Precise machining of vertical walls is possible due to a back taper and a strong, seamless ball nose cutting edge geometry.

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCONMS	B2	ZEFP	Type	Effective length for inclined angle			
												0.5°	1°	2°	3°
VFR2XLB0010N005	●	0.1	0.2	0.15	0.5	0.18	50	4	11.5°	2	1	0.5	0.5	0.6	0.7
VFR2XLB0010N010	●	0.1	0.2	0.15	1	0.18	50	4	10.9°	2	1	1	1.1	1.2	1.3
VFR2XLB0015N010	●	0.15	0.3	0.24	1	0.28	50	4	10.9°	2	1	1	1.1	1.2	1.3
VFR2XLB0015N015	●	0.15	0.3	0.24	1.5	0.28	50	4	10.4°	2	1	1.6	1.6	1.8	2
VFR2XLB0015N020	●	0.15	0.3	0.24	2	0.28	50	4	9.9°	2	1	2.1	2.2	2.4	2.6
VFR2XLB0020N010	●	0.2	0.4	0.3	1	0.37	50	4	11°	2	1	1	1.1	1.2	1.3
VFR2XLB0020N015	●	0.2	0.4	0.3	1.5	0.37	50	4	10.4°	2	1	1.5	1.6	1.7	1.9
VFR2XLB0020N020	●	0.2	0.4	0.3	2	0.37	50	4	9.9°	2	1	2.1	2.2	2.3	2.6
VFR2XLB0020N025	●	0.2	0.4	0.3	2.5	0.37	50	4	9.5°	2	1	2.6	2.7	2.9	3.3
VFR2XLB0020N030	●	0.2	0.4	0.3	3	0.37	50	4	9.1°	2	1	3.1	3.2	3.5	3.9
VFR2XLB0020N040	●	0.2	0.4	0.3	4	0.37	50	4	8.4°	2	1	4.2	4.3	4.7	5.2
VFR2XLB0025N015	●	0.25	0.5	0.37	1.5	0.47	50	4	10.4°	2	1	1.5	1.6	1.7	1.9
VFR2XLB0025N020	●	0.25	0.5	0.37	2	0.47	50	4	9.9°	2	1	2.1	2.1	2.3	2.6
VFR2XLB0025N025	●	0.25	0.5	0.37	2.5	0.47	50	4	9.5°	2	1	2.6	2.7	2.9	3.2
VFR2XLB0025N030	●	0.25	0.5	0.37	3	0.47	50	4	9.1°	2	1	3.1	3.2	3.5	3.9
VFR2XLB0025N040	●	0.25	0.5	0.37	4	0.47	50	4	8.3°	2	1	4.1	4.3	4.7	5.2
VFR2XLB0030N020	●	0.3	0.6	0.45	2	0.57	50	4	9.9°	2	1	2.1	2.2	2.4	2.6
VFR2XLB0030N020S06	●	0.3	0.6	0.45	2	0.57	50	6	10.6°	2	1	2.1	2.2	2.4	2.6
VFR2XLB0030N030	●	0.3	0.6	0.45	3	0.57	50	4	9°	2	1	3.1	3.3	3.6	4
VFR2XLB0030N030S06	●	0.3	0.6	0.45	3	0.57	50	6	9.9°	2	1	3.1	3.3	3.6	4

1/3

1. The colour of the coating on the VFR2XLB items is different from other end mills in the VFR series.

VFR2XLB – BALL NOSE, 2 FLUTE, LONG NECK

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCONMS	B2	ZEFP	Type	Effective length for inclined angle			
												0.5°	1°	2°	3°
VFR2XLB0030N040	●	0.3	0.6	0.45	4	0.57	50	4	8.2°	2	1	4.2	4.4	4.8	5.3
VFR2XLB0030N050	●	0.3	0.6	0.45	5	0.57	50	4	7.6°	2	1	5.2	5.5	6	6.6
VFR2XLB0030N060	●	0.3	0.6	0.45	6	0.57	50	4	7.1°	2	1	6.3	6.6	7.2	7.9
VFR2XLB0040N030	●	0.4	0.8	0.6	3	0.77	50	4	8.9°	2	1	3.1	3.3	3.6	3.9
VFR2XLB0040N040	●	0.4	0.8	0.6	4	0.77	50	4	8.2°	2	1	4.2	4.4	4.8	5.2
VFR2XLB0040N060	●	0.4	0.8	0.6	6	0.77	50	4	6.9°	2	1	6.3	6.5	7.2	7.9
VFR2XLB0040N080	●	0.4	0.8	0.6	8	0.77	50	4	6°	2	1	8.4	8.7	9.5	10.6
VFR2XLB0050N030	●	0.5	1	0.75	3	0.96	50	4	8.7°	2	1	3.2	3.4	3.7	4.1
VFR2XLB0050N030S06	●	0.5	1	0.75	3	0.96	50	6	9.8°	2	1	3.2	3.4	3.7	4.1
VFR2XLB0050N040	●	0.5	1	0.75	4	0.96	50	4	7.9°	2	1	4.3	4.5	4.9	5.4
VFR2XLB0050N040S06	●	0.5	1	0.75	4	0.96	50	6	9.2°	2	1	4.3	4.5	4.9	5.4
VFR2XLB0050N060	●	0.5	1	0.75	6	0.96	50	4	6.7°	2	1	6.3	6.5	7.2	7.9
VFR2XLB0050N060S06	●	0.5	1	0.75	6	0.96	50	6	8.2°	2	1	6.3	6.5	7.2	7.9
VFR2XLB0050N080	●	0.5	1	0.75	8	0.96	50	4	5.8°	2	1	8.5	8.9	9.7	10.7
VFR2XLB0050N100	●	0.5	1	0.75	10	0.96	50	4	5.1°	2	1	10.6	11.1	12.1	13.4
VFR2XLB0050N120	●	0.5	1	0.75	12	0.96	50	4	4.6°	2	1	12.7	13.2	14.5	16
VFR2XLB0075N060	●	0.75	1.5	1.1	6	1.44	50	4	6.3°	2	1	6.3	6.6	7.2	7.9
VFR2XLB0075N060S06	●	0.75	1.5	1.1	6	1.44	50	6	8°	2	1	6.3	6.6	7.2	7.9
VFR2XLB0075N080	●	0.75	1.5	1.1	8	1.44	50	4	5.4°	2	1	8.4	8.8	9.6	10.6
VFR2XLB0075N080S06	●	0.75	1.5	1.1	8	1.44	50	6	7.2°	2	1	8.4	8.8	9.6	10.6
VFR2XLB0075N100	●	0.75	1.5	1.1	10	1.44	50	4	4.7°	2	1	10.5	11	12	13.2
VFR2XLB0075N120	●	0.75	1.5	1.1	12	1.44	50	4	4.2°	2	1	12.6	13.1	14.4	15.9
VFR2XLB0075N140	●	0.75	1.5	1.1	14	1.44	50	4	3.8°	2	1	14.7	15.3	16.8	18.5
VFR2XLB0075N160	●	0.75	1.5	1.1	16	1.44	60	4	3.4°	2	1	16.8	17.5	19.2	21.2
VFR2XLB0100N060	●	1	2	1.5	6	1.94	50	4	5.8°	2	1	6.3	6.6	7.1	7.8
VFR2XLB0100N060S06	●	1	2	1.5	6	1.94	50	6	7.8°	2	1	6.3	6.6	7.1	7.8
VFR2XLB0100N080	●	1	2	1.5	8	1.94	50	4	4.8°	2	1	8.4	8.8	9.5	10.5
VFR2XLB0100N080S06	●	1	2	1.5	8	1.94	50	6	6.9°	2	1	8.4	8.8	9.5	10.5
VFR2XLB0100N100	●	1	2	1.5	10	1.94	50	4	4.2°	2	1	10.5	10.9	11.9	13.1
VFR2XLB0100N100S06	●	1	2	1.5	10	1.94	50	6	6.2°	2	1	10.5	10.9	11.9	13.1
VFR2XLB0100N120	●	1	2	1.5	12	1.94	50	4	3.6°	2	1	12.6	13.1	14.3	15.8
VFR2XLB0100N120S06	●	1	2	1.5	12	1.94	50	6	5.6°	2	1	12.6	13.1	14.3	15.8
VFR2XLB0100N160	●	1	2	1.5	16	1.94	60	4	2.9°	2	1	16.8	17.5	19.1	*
VFR2XLB0100N160S06	●	1	2	1.5	16	1.94	60	6	4.7°	2	1	16.8	17.5	19.1	21.1
VFR2XLB0100N200	●	1	2	1.5	20	1.94	60	4	2.4°	2	1	20.9	21.8	23.9	*
VFR2XLB0100N200S06	●	1	2	1.5	20	1.94	60	6	4°	2	1	20.9	21.8	23.9	26.4
VFR2XLB0125N100	●	1.25	2.5	1.9	10	2.4	60	4	3.5°	2	1	10.4	10.8	11.8	12.9
VFR2XLB0125N150	●	1.25	2.5	1.9	15	2.4	60	4	2.5°	2	1	15.6	16.3	17.8	*
VFR2XLB0150N100	●	1.5	3	2.3	10	2.9	60	6	5.5°	2	1	10.4	10.8	11.7	12.9
VFR2XLB0150N120	●	1.5	3	2.3	12	2.9	60	6	4.9°	2	1	12.5	13	14.1	15.5
VFR2XLB0150N160	●	1.5	3	2.3	16	2.9	70	6	4°	2	1	16.7	17.3	18.9	20.8
VFR2XLB0150N200	●	1.5	3	2.3	20	2.9	70	6	3.4°	2	1	20.8	21.7	23.7	26.1
VFR2XLB0150N250	●	1.5	3	2.3	25	2.9	70	6	2.8°	2	1	26.1	27.2	29.7	*
VFR2XLB0150N300	●	1.5	3	2.3	30	2.9	70	6	2.5°	2	1	31.3	32.6	35.7	*

2/3

1. The colour of the coating on the VFR2XLB items is different from other end mills in the VFR series.

* No interference



VFR2XLB – BALL NOSE, 2 FLUTE, LONG NECK

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCONMS	B2	ZEFP	Type	Effective length for inclined angle			
												0.5°	1°	2°	3°
VFR2XLB0200N100	●	2	4	3	10	3.9	70	6	4.5°	2	1	10.4	10.8	11.6	12.7
VFR2XLB0200N120	●	2	4	3	12	3.9	70	6	3.9°	2	1	12.5	12.9	14	15.4
VFR2XLB0200N160	●	2	4	3	16	3.9	70	6	3.1°	2	1	16.6	17.3	18.8	20.7
VFR2XLB0200N200	●	2	4	3	20	3.9	70	6	2.6°	2	1	20.8	21.7	23.6	*
VFR2XLB0200N250	●	2	4	3	25	3.9	70	6	2.1°	2	1	26	27.1	29.6	*
VFR2XLB0200N300	●	2	4	3	30	3.9	70	6	1.8°	2	1	31.2	32.6	*	*
VFR2XLB0250N200	●	2.5	5	3.8	20	4.9	70	6	1.5°	2	1	20.8	21.6	*	*
VFR2XLB0250N250	●	2.5	5	3.8	25	4.9	70	6	1.2°	2	1	26	27.1	*	*
VFR2XLB0300N180	●	3	6	6	18	5.85	80	6	—	2	2	*	*	*	*
VFR2XLB0300N300	●	3	6	6	30	5.85	80	6	—	2	2	*	*	*	*
3/3															

1. The colour of the coating on the VFR2XLB items is different from other end mills in the VFR series.



* No interference

VFR2XLB

RECOMMENDED CUTTING CONDITIONS

Material	RE	LU	n	f	ap	ae
H Hardened steel (45 – 55 HRC)	0.1	0.5	40000	300	0.003	0.01
	0.1	1	40000	300	0.002	0.01
	0.15	1	40000	500	0.007	0.015
	0.15	1.5	40000	500	0.005	0.015
	0.15	2	40000	500	0.003	0.015
	0.2	1	40000	1400	0.015	0.02
	0.2	1.5	40000	1000	0.01	0.02
	0.2	2	40000	1000	0.01	0.02
	0.2	2.5	40000	700	0.005	0.02
	0.2	3	40000	700	0.005	0.02
	0.2	4	40000	600	0.004	0.02
	0.25	1.5	40000	2000	0.02	0.025
	0.25	2	40000	2000	0.02	0.025
	0.25	2.5	40000	1500	0.015	0.025
	0.25	3	40000	1200	0.015	0.025
	0.25	4	36000	900	0.1	0.025
	0.3	2	40000	2800	0.03	0.03
	0.3	3	40000	2800	0.03	0.03
	0.3	4	35000	2000	0.02	0.03
	0.3	5	30000	1000	0.01	0.03
	0.3	6	30000	800	0.008	0.03
	0.4	3	40000	3000	0.04	0.04
	0.4	4	40000	3000	0.02	0.04
	0.4	6	30000	1600	0.02	0.04
	0.4	8	25000	1000	0.01	0.04
	0.5	3	40000	4000	0.05	0.05
	0.5	4	40000	4000	0.05	0.05
	0.5	6	35000	2000	0.03	0.05
	0.5	8	30000	1600	0.02	0.05
	0.5	10	20000	1000	0.01	0.05
	0.5	12	20000	1000	0.01	0.05
	0.75	6	40000	5000	0.07	0.075
	0.75	8	40000	5000	0.07	0.075
	0.75	10	40000	4500	0.06	0.075
	0.75	12	32000	3400	0.04	0.075
	0.75	14	16000	1500	0.04	0.075
	0.75	16	13000	1200	0.03	0.075
	1	6	40000	6000	0.1	0.1
	1	8	40000	5000	0.1	0.1
	1	10	40000	5000	0.08	0.1
	1	12	40000	5000	0.08	0.1
	1	16	32000	3500	0.05	0.1
	1	20	10000	1000	0.04	0.1
	1.25	10	36000	5000	0.12	0.25
	1.25	15	36000	4600	0.08	0.25
	1.5	10	32000	5100	0.15	0.3
	1.5	12	32000	5100	0.13	0.3


VFR2XLB

Material	RE	LU	n	f	ap	ae
H Hardened steel (45 – 55 HRC)	1.5	16	32000	4500	0.1	0.3
	1.5	20	27000	3800	0.1	0.3
	1.5	25	21000	2700	0.08	0.3
	1.5	30	9000	1000	0.08	0.3
	2	10	24000	4800	0.2	0.4
	2	12	24000	4800	0.2	0.4
	2	16	24000	3800	0.15	0.4
	2	20	24000	3800	0.15	0.4
	2	25	24000	3800	0.15	0.4
	2	30	24000	3000	0.1	0.4
	2.5	20	19000	3400	0.2	0.5
	2.5	25	19000	3400	0.2	0.5
	3	18	16000	3500	0.25	0.6
	3	30	16000	3500	0.2	0.6
H Hardened steel (55 – 70 HRC)	0.1	0.5	40000	300	0.002	0.01
	0.1	1	40000	300	0.002	0.01
	0.15	1	40000	500	0.005	0.015
	0.15	1.5	40000	500	0.003	0.015
	0.15	2	40000	500	0.002	0.015
	0.2	1	40000	1400	0.01	0.02
	0.2	1.5	40000	1000	0.006	0.02
	0.2	2	40000	1000	0.006	0.02
	0.2	2.5	40000	700	0.003	0.02
	0.2	3	40000	700	0.003	0.02
	0.2	4	40000	500	0.003	0.02
	0.25	1.5	40000	2000	0.015	0.025
	0.25	2	40000	2000	0.015	0.025
	0.25	2.5	40000	1500	0.01	0.025
	0.25	3	40000	1200	0.01	0.025
	0.25	4	36000	900	0.007	0.025
	0.3	2	40000	2800	0.02	0.03
	0.3	3	40000	2800	0.02	0.03
	0.3	4	35000	2000	0.015	0.03
	0.3	5	30000	1000	0.007	0.03
	0.3	6	30000	800	0.005	0.03
	0.4	3	40000	3000	0.03	0.04
	0.4	4	40000	3000	0.015	0.04
	0.4	6	30000	1600	0.01	0.04
	0.4	8	25000	1000	0.007	0.04
	0.5	3	40000	4000	0.04	0.05
	0.5	4	40000	4000	0.04	0.05
	0.5	6	35000	2000	0.02	0.05
	0.5	8	30000	1600	0.01	0.05
	0.5	10	20000	1000	0.01	0.05
	0.5	12	20000	800	0.008	0.05
	0.75	6	40000	4000	0.06	0.075
	0.75	8	40000	3500	0.06	0.075
	0.75	10	40000	2400	0.06	0.075
	0.75	12	32000	2000	0.04	0.075
	0.75	14	16000	1200	0.03	0.075

VFR2XLB

Material	RE	LU	n	f	ap	ae
H Hardened steel (55 – 70 HRC)	0.75	16	13000	1200	0.02	0.075
	1	6	40000	3400	0.1	0.1
	1	8	40000	3000	0.1	0.1
	1	10	40000	3000	0.07	0.1
	1	12	40000	2600	0.05	0.1
	1	16	32000	1700	0.03	0.1
	1	20	10000	1000	0.03	0.1
	1.25	10	36000	2600	0.11	0.25
	1.25	15	36000	2000	0.075	0.25
	1.5	10	32000	2200	0.15	0.3
	1.5	12	32000	2200	0.13	0.3
	1.5	16	32000	1800	0.1	0.3
	1.5	20	27000	1600	0.06	0.3
	1.5	25	21000	1200	0.06	0.3
	1.5	30	9000	700	0.05	0.3
	2	10	24000	2200	0.2	0.4
	2	12	24000	2200	0.2	0.4
	2	16	24000	1500	0.15	0.4
	2	20	24000	1500	0.15	0.4
	2	25	24000	1100	0.1	0.4
	2	30	24000	1100	0.08	0.4
	2.5	20	19000	1400	0.2	0.5
	2.5	25	19000	1400	0.2	0.5
	3	18	16000	1000	0.2	0.6
	3	30	16000	1000	0.2	0.6

3/3



1. When the inclination angle of machined surface is large, or machining with large cutting loads such as in a corner area, reduce the revolution and feed rate.
2. If the depth of cut is shallow, the revolution and feed rate can be increased.
3. Cutting conditions may differ considerably due to the tool overhang, depth of cut and machine tool condition. Please use the table above as a reference starting point.

VFR2SSB



BALL NOSE, 2 FLUTE, SHORT CUT LENGTH, SHORT SHANK

H



RE ≤ 6

±0.005


 $4 \leq \text{DCONMS} \leq 6$ $8 \leq \text{DCONMS} \leq 10$ $\text{DCONMS} = 12$

0

- 0.005


0

- 0.006


0

- 0.008

1

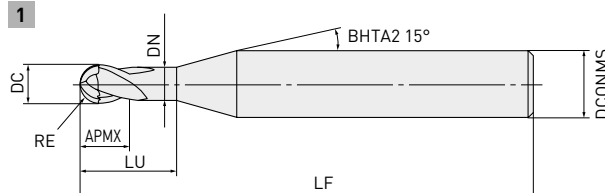

2

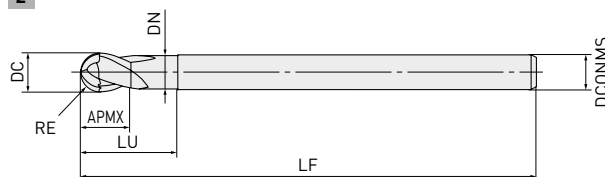

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCONMS	ZEFP	Type
VFR2SSBR0050S04	●	0.5	1	1	2	0.94	40	4	2	1
VFR2SSBR0050	●	0.5	1	1	2	0.94	40	6	2	1
VFR2SSBR0075S04	●	0.75	1.5	1.5	3	1.44	40	4	2	1
VFR2SSBR0075	●	0.75	1.5	1.5	3	1.44	40	6	2	1
VFR2SSBR0100	●	1	2	2	4	1.9	45	6	2	1
VFR2SSBR0150	●	1.5	3	3	6	2.9	45	6	2	1
VFR2SSBR0200	●	2	4	4	8	3.9	45	6	2	1
VFR2SSBR0250	●	2.5	5	5	10	4.9	50	6	2	1
VFR2SSBR0300	●	3	6	6	12	5.85	50	6	2	2
VFR2SSBR0400	●	4	8	8	14	7.85	60	8	2	2
VFR2SSBR0500	●	5	10	10	18	9.7	70	10	2	2
VFR2SSBR0600	●	6	12	12	22	11.7	75	12	2	2

1/1




VFR2SSB


RECOMMENDED CUTTING CONDITIONS

Material	RE	Inclination angle $\alpha < 15^\circ$		Inclination angle $\alpha > 15^\circ$		ap	ae
		n	f	n	f		
H Hardened steel (45 – 55HRC)	R 0.5	40000	8000	40000	3200	0.06	0.10
	R 0.75	40000	9600	40000	4000	0.09	0.15
	R 1	40000	9600	39000	4700	0.11	0.20
	R 1.5	40000	12000	27000	4300	0.13	0.30
	R 2	32000	10880	20000	3600	0.15	0.40
	R 2.5	25000	9000	16000	2900	0.20	0.50
	R 3	21000	8400	13000	2600	0.25	0.60
	R 4	16000	6400	10000	2000	0.30	0.80
	R 5	13000	5200	8000	1700	0.50	1.00
	R 6	9000	3600	6000	1300	0.50	1.20
	R 0.5	40000	5600	40000	2400	0.05	0.10
	R 0.75	40000	7200	32000	2500	0.075	0.15
	R 1	40000	8000	24000	2400	0.1	0.20
	R 1.5	32000	7700	16000	2200	0.12	0.30
	R 2	24000	6200	12000	1900	0.13	0.40
	R 2.5	19000	5300	9600	1700	0.15	0.50
H Hardened steel (55 – 62HRC)	R 3	16000	4800	8000	1600	0.2	0.60
	R 4	12000	3600	6000	1200	0.2	0.80
	R 5	10000	3200	4800	960	0.2	1.00
	R 6	7000	2200	3600	720	0.3	1.20
	R 0.5	40000	3600	32000	1300	0.04	0.10
	R 0.75	32000	4500	21000	1200	0.05	0.15
	R 1	24000	3800	16000	1000	0.07	0.20
	R 1.5	16000	3200	11000	880	0.09	0.30
	R 2	12000	2400	8000	800	0.1	0.40
	R 2.5	9600	2100	6000	600	0.1	0.50
	R 3	8000	1700	5000	600	0.11	0.60
	R 4	6000	1400	4000	480	0.11	0.80
	R 5	4800	1100	3000	420	0.12	1.00
	R 6	3600	860	2200	310	0.12	1.20
	R 0.5	40000	3600	32000	1300	0.04	0.10
	R 0.75	32000	4500	21000	1200	0.05	0.15
	R 1	24000	3800	16000	1000	0.07	0.20
	R 1.5	16000	3200	11000	880	0.09	0.30
	R 2	12000	2400	8000	800	0.1	0.40
	R 2.5	9600	2100	6000	600	0.1	0.50
	R 3	8000	1700	5000	600	0.11	0.60
	R 4	6000	1400	4000	480	0.11	0.80
	R 5	4800	1100	3000	420	0.12	1.00
	R 6	3600	860	2200	310	0.12	1.20

1/1



1. α is the inclination angle of the machined surface.
2. If the rigidity of the machine or the work materials installation is very low, or chattering and noise are generated, reduce the revolutions and feed rate proportionately.




VFR2SB



BALL NOSE, 2 FLUTE, SHORT CUT LENGTH

H

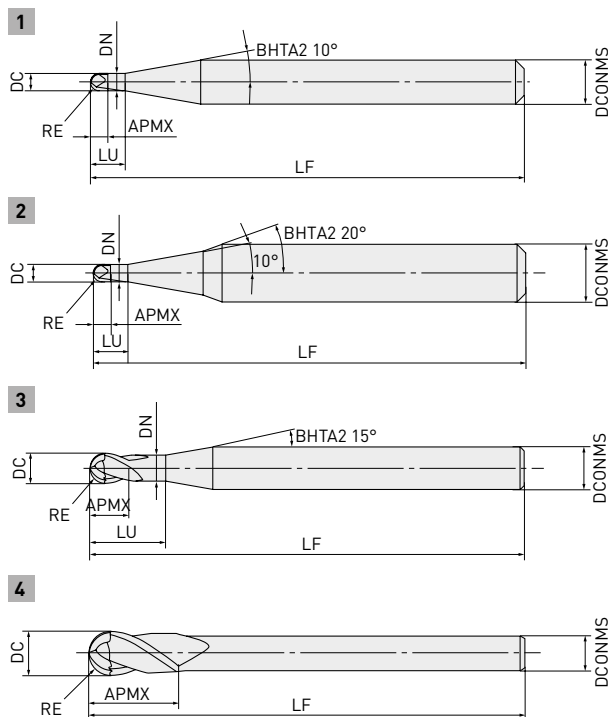

RE < 6

RE > 6

±0.005

±0.010



DCONMS=3 4<DCONMS<6 8<DCONMS<10 DCONMS=12,16 DCONMS=20

0

0

0

0

0

- 0.004

- 0.005

- 0.006

- 0.008

- 0.009

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCONMS	ZEFP	Type
VFR2SBR0010	●	0.1	0.2	0.2	0.4	0.17	45	4	2	1
VFR2SBR0010S06	●	0.1	0.2	0.2	0.4	0.17	50	6	2	2
VFR2SBR0015	●	0.15	0.3	0.3	0.6	0.27	45	4	2	1
VFR2SBR0015S06	●	0.15	0.3	0.3	0.6	0.27	50	6	2	2
VFR2SBR0020	●	0.2	0.4	0.4	0.8	0.36	45	4	2	1
VFR2SBR0020S06	●	0.2	0.4	0.4	0.8	0.36	50	6	2	2
VFR2SBR0030	●	0.3	0.6	0.6	1.2	0.56	45	4	2	3
VFR2SBR0030S06	●	0.3	0.6	0.6	1.2	0.56	50	6	2	3
VFR2SBR0040	●	0.4	0.8	0.8	1.6	0.76	45	4	2	3
VFR2SBR0040S06	●	0.4	0.8	0.8	1.6	0.76	50	6	2	3
VFR2SBR0050	●	0.5	1	1	2	0.94	45	4	2	3
VFR2SBR0050S06	●	0.5	1	1	2	0.94	50	6	2	3
VFR2SBR0060	●	0.6	1.2	1.2	2.4	1.14	45	4	2	3
VFR2SBR0060S06	●	0.6	1.2	1.2	2.4	1.14	50	6	2	3

1/2

VFR2SB – BALL NOSE, 2 FLUTE, SHORT CUT LENGTH

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCONMS	ZEFP	Type
VFR2SBR0070	●	0.7	1.4	1.4	2.8	1.34	45	4	2	3
VFR2SBR0070S06	●	0.7	1.4	1.4	2.8	1.34	50	6	2	3
VFR2SBR0075	●	0.75	1.5	1.5	3	1.44	45	4	2	3
VFR2SBR0075S06	●	0.75	1.5	1.5	3	1.44	50	6	2	3
VFR2SBR0080	●	0.8	1.6	1.6	3.2	1.54	45	4	2	3
VFR2SBR0080S06	●	0.8	1.6	1.6	3.2	1.54	50	6	2	3
VFR2SBR0090	●	0.9	1.8	1.8	3.6	1.74	45	4	2	3
VFR2SBR0090S06	●	0.9	1.8	1.8	3.6	1.74	50	6	2	3
VFR2SBR0100	●	1	2	2	4	1.9	50	4	2	3
VFR2SBR0100S06	●	1	2	2	4	1.9	60	6	2	3
VFR2SBR0125S06	●	1.25	2.5	2.5	5	2.4	60	6	2	3
VFR2SBR0150S03	●	1.5	3	3	—	—	60	3	2	4
VFR2SBR0150	●	1.5	3	3	6	2.9	70	6	2	3
VFR2SBR0200S04	●	2	4	4	—	—	60	4	2	4
VFR2SBR0200	●	2	4	4	8	3.9	70	6	2	3
VFR2SBR0250	●	2.5	5	5	10	4.9	80	6	2	3
VFR2SBR0300	●	3	6	12	—	—	80	6	2	4
VFR2SBR0400	●	4	8	14	—	—	90	8	2	4
VFR2SBR0500	●	5	10	18	—	—	100	10	2	4
VFR2SBR0600	●	6	12	22	—	—	110	12	2	4
VFR2SBR0800	●	8	16	30	—	—	140	16	2	4
VFR2SBR1000	●	10	20	38	—	—	160	20	2	4

2/2

VFR2SB


RECOMMENDED CUTTING CONDITIONS

Material	RE	Inclination angle $\alpha < 15^\circ$		Inclination angle $\alpha > 15^\circ$		ap	ae
		n	f	n	f		
H Hardened steel (45 – 55HRC)	R 0.1	40000	320	40000	240	0.003	0.02
	R 0.15	40000	640	40000	560	0.01	0.03
	R 0.2	40000	1600	40000	1200	0.02	0.04
	R 0.3	40000	3200	40000	1600	0.03	0.06
	R 0.4	40000	6400	40000	2400	0.05	0.08
	R 0.5	40000	8000	40000	3200	0.06	0.10
	R 0.75	40000	9600	40000	4000	0.09	0.15
	R 1	40000	9600	39000	4700	0.11	0.20
	R 1.25	40000	10400	32000	4500	0.12	0.25
	R 1.5	40000	12000	27000	4300	0.13	0.30
	R 2	32000	10880	20000	3600	0.15	0.40
	R 2.5	25000	9000	16000	2900	0.20	0.50
	R 3	21000	8400	13000	2600	0.25	0.60
	R 4	16000	6400	10000	2000	0.30	0.80
	R 5	13000	5200	8000	1700	0.50	1.00
	R 6	9000	3600	6000	1300	0.50	1.20
	R 8	6000	2400	4000	1000	0.50	1.60
	R10	4500	1800	3000	780	0.50	2.00
H Hardened steel (55 – 62HRC)	R 0.1	40000	320	40000	160	0.003	0.02
	R 0.15	40000	640	40000	400	0.007	0.03
	R 0.2	40000	1400	40000	1000	0.015	0.04
	R 0.3	40000	2800	40000	1200	0.025	0.06
	R 0.4	40000	4000	40000	1600	0.04	0.08
	R 0.5	40000	5600	40000	2400	0.05	0.10
	R 0.75	40000	7200	32000	2500	0.075	0.15
	R 1	40000	8000	24000	2400	0.1	0.20
	R 1.25	37000	8100	19000	2300	0.11	0.25
	R 1.5	32000	7700	16000	2200	0.12	0.30
	R 2	24000	6200	12000	1900	0.13	0.40
	R 2.5	19000	5300	9600	1700	0.15	0.50
	R 3	16000	4800	8000	1600	0.2	0.60
	R 4	12000	3600	6000	1200	0.2	0.80
	R 5	10000	3200	4800	960	0.2	1.00
	R 6	7000	2200	3600	720	0.3	1.20
	R 8	5000	1600	2500	500	0.3	1.60
	R10	4000	1300	1800	360	0.3	2.00


VFR2SB

Material	RE	Inclination angle $\alpha < 15^\circ$		Inclination angle $\alpha > 15^\circ$		ap	ae
		n	f	n	f		
H Hardened steel (62 – 70HRC)	R 0.1	40000	320	40000	160	0.002	0.02
	R 0.15	40000	640	40000	400	0.005	0.03
	R 0.2	40000	1200	40000	1000	0.01	0.04
	R 0.3	40000	2000	40000	1200	0.02	0.06
	R 0.4	40000	2800	40000	1600	0.03	0.08
	R 0.5	40000	3600	32000	1300	0.04	0.10
	R 0.75	32000	4500	21000	1200	0.05	0.15
	R 1	24000	3800	16000	1000	0.07	0.20
	R 1.25	19000	3400	13000	1000	0.08	0.25
	R 1.5	16000	3200	11000	880	0.09	0.30
	R 2	12000	2400	8000	800	0.1	0.40
	R 2.5	9600	2100	6000	600	0.1	0.50
	R 3	8000	1700	5000	600	0.11	0.60
	R 4	6000	1400	4000	480	0.11	0.80
	R 5	4800	1100	3000	420	0.12	1.00
	R 6	3600	860	2200	310	0.12	1.20
	R 8	2500	650	1500	240	0.15	1.60
	R10	1800	470	1000	160	0.15	2.00

2/2



1. α is the inclination angle of the machined surface.
2. If the rigidity of the machine or the work materials installation is very low, or chattering and noise are generated, reduce the revolutions and feed rate proportionately.



VFR2SBF




BALL NOSE, 2 FLUTE, SHORT CUT LENGTH,
FOR MIRROR FINISHING

P H



	RE ≤ 3
	±0.010
	4 ≤ DCONMS ≤ 6
	0
	- 0.005

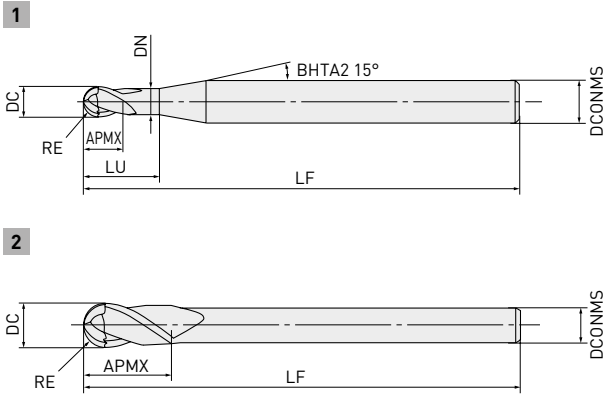

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCONMS	ZEFP	Type
VFR2SBFR0050	●	0.5	1	1	2	0.94	45	4	2	1
VFR2SBFR0075	●	0.75	1.5	1.5	3	1.44	45	4	2	1
VFR2SBFR0100	●	1	2	2	4	1.9	60	6	2	1
VFR2SBFR0125	●	1.25	2.5	2.5	5	2.4	60	6	2	1
VFR2SBFR0150	●	1.5	3	3	6	2.9	70	6	2	1
VFR2SBFR0200	●	2	4	4	8	3.9	70	6	2	1
VFR2SBFR0250	●	2.5	5	5	10	4.9	80	6	2	1
VFR2SBFR0300	●	3	6	6	—	—	80	6	2	2


1/1

VFR2SBF


RECOMMENDED CUTTING CONDITIONS

Material	RE	Inclination angle $\alpha < 15^\circ$		Inclination angle $\alpha > 15^\circ$		ap	ae
		n	f	n	f		
P Pre-hardened steel (35 – 45HRC) Carbon steel, Alloy steel (280 – 350HB) Alloy steel (<350HB) Hardened steel (40 – 62HRC)	R 0.5	40000	800	40000	800	0.007	0.007
	R 0.75	40000	800	40000	800	0.009	0.009
	R 1.0	35000	1050	35000	1050	0.011	0.011
	R 1.25	35000	1050	35000	1050	0.013	0.013
	R 1.5	35000	1050	35000	1050	0.015	0.015
	R 2.0	25000	1000	25000	1000	0.017	0.017
	R 2.5	25000	1000	25000	1000	0.020	0.020
	R 3.0	25000	1000	25000	1000	0.020	0.020
H High hardened steel (62 – 70HRC)	R 0.5	40000	560	40000	560	0.005	0.005
	R 0.75	40000	560	40000	560	0.007	0.007
	R 1.0	35000	700	35000	700	0.009	0.009
	R 1.25	35000	700	35000	700	0.011	0.011
	R 1.5	35000	700	35000	700	0.013	0.013
	R 2.0	25000	750	25000	750	0.015	0.015
	R 2.5	25000	750	25000	750	0.015	0.015
	R 3.0	25000	750	25000	750	0.015	0.015

1/1



1. This tool is recommended for finish machining only.
2. Air blow or oil mist is recommended for good chip evacuation.
3. α is the inclination angle of the machined surface.
4. For profile machining such as moulds, machining conditions may differ considerably depending on the workpiece geometry, machining methods and depth of cut. Reduce the feed rate especially when machining the corner sections of a workpiece.




APPLICATION EXAMPLES

COMPARISON OF FINISHED SURFACES



Material	1.2344 [52 HRC]
Tool	VFR2SBFR0300
$n \text{ (min}^{-1}\text{)}$	32.000
$V_c \text{ (m/min)}$	603
$V_f \text{ (mm/min)}$	1.280
$f_z \text{ (mm/t.)}$	0.02
$a_p \text{ (mm)}$	0.02
$a_e \text{ (mm)}$	0.02
Overhang (mm)	15
Cutting mode	Air blow
Machine	Vertical MC (HSK-E25)

VFR2SBF

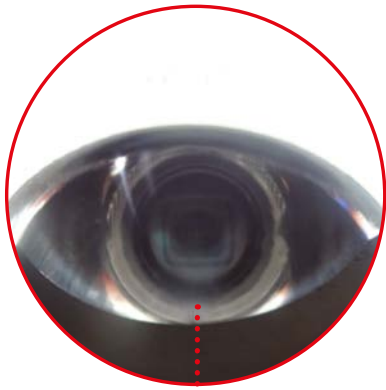

Good surface

Conventional end mills

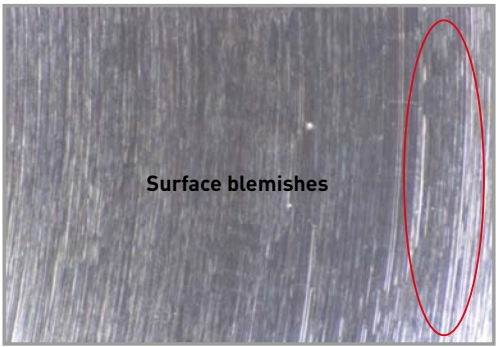
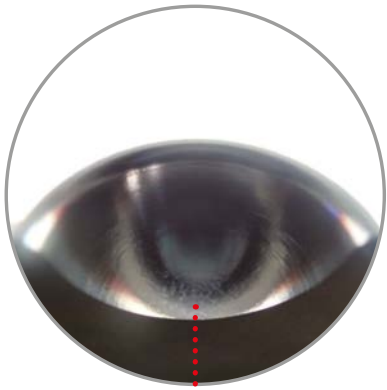


Surface blemishes


Poor surface

APPLICATION EXAMPLES

Material	1.3343 [64 HRC]
Tool	VFR2SBR0300
n (min ⁻¹)	5.400
V_f (mm/min)	540
f_z (mm/t.)	0.05
a_p (mm)	2.0
a_e (mm)	2.0
Overhang (mm)	22
Cutting mode	Air blow
Machine	Vertical MC (HSK-A63)

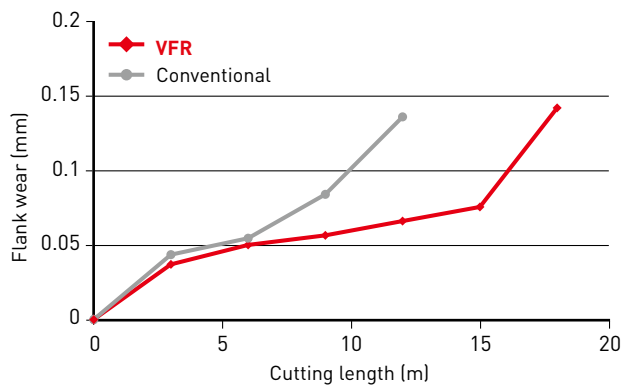
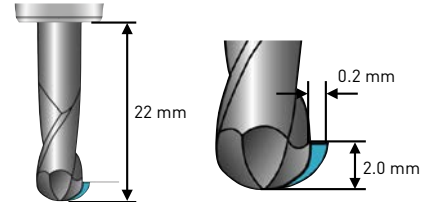


VFR



Conventional

Material	1.2344 [52 HRC]
Tool	VFR2SBR0300
n (min ⁻¹)	17.000
V_f (mm/min)	1.700
f_z (mm/t.)	0.05
a_p (mm)	2.0
a_e (mm)	0.3
Overhang (mm)	22
Cutting mode	Air blow
Machine	Vertical MC (HSK-A63)

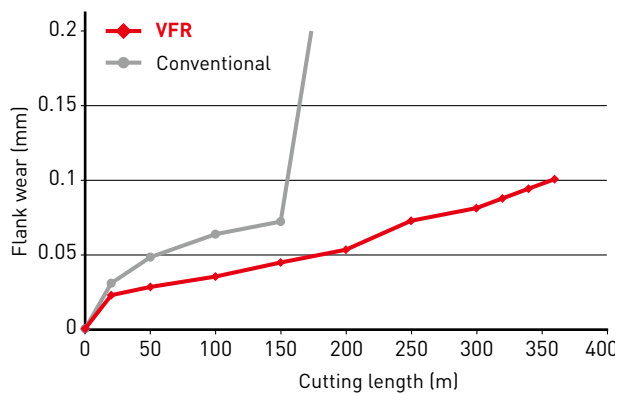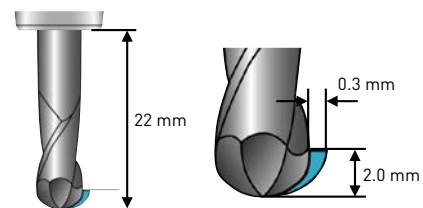

VFR



Conventional

SYMBOLS

 Recommended cutting conditions	MACHINING TYPE
NEW Completely new products or expansions released in the current Spring or Autumn product launch and are not included in the latest version of the General Catalogue.	 Roughing
NEW Products or expansions that have already been introduced in one of the previous Spring or Autumn product launches but are not included in the latest General Catalogue.	 Medium cutting
APPLICATION	 Light cutting
 Face milling	 Pre-finishing
 Chamfer milling	 Finishing
 Shoulder milling with R	 Fine-finishing
 Face milling close to a wall	TOOL MATERIAL
 Shoulder milling	 Ultra micro grain carbide Ultra micro grain carbide substrate material.
 Side milling	 Cubic boron nitride Mitsubishi Materials' original CBN material.
 Slot milling	 Ceramic For high speed efficient machining of super alloys due to the excellent high temperature strength property.
 Ramping	 High hardness powder metallurgy HSS High hardness powder metallurgy HSS substrate material.
 Pocket milling	 High grade high alloy HSS High grade high alloy HSS substrate material.
 Slot milling with R	 Cobalt high speed steel Cobalt high speed steel substrate material.
 Copy milling	 High speed steel High speed steel substrate material.
 T-Slot milling	

SYMBOLS

COATING



SMART MIRACLE coating

New smooth and dense coating technology for high efficiency milling of difficult to cut materials.



CRN coating

Newly developed CrN coating for Copper Electrodes machining.



Violet coating

Increased tool life of 2-3 times more than TiN coated products.



DP coating

New generation coating suitable for a wide range of materials.



MIRACLE coating

The original Miracle (Al,Ti)N coating. Also suitable for dry cutting.



[Al, Ti]N coating

[Al,Ti]N highly versatile application range.



[Al,Ti,Cr]N multi-layer coating

For carbon, alloy and hardened steels.



IMPACT MIRACLE coating

Single phase nano crystal coating technology has higher film hardness and heat resistance.



MIRACLE coating

The original MIRACLE (Al,Ti)N coating. Also suitable for dry cutting.



VFR coating

The [AlCrSi]N/[AlTiSi]N PVD multilayer coating is ideal for machining of extremely hard materials up to 70 HRC.



DLC coating

Hardness similar to CVD diamond coating achieved with high adhesion strength.



Diamond coating

Suitable for CFRP and CFRP-aluminium materials.



Diamond coating

Suitable for graphite machining.



Diamond coating

The original CVD diamond coating.



CVD Diamond coating

Unique multi-layer micro-grain diamond crystal control technology drastically improves wear resistance and smoothness.

CUTTING EDGE PROPERTIES



Sharp corner edge

Indicates the end mill has a sharp corner edge.



Gash land

Indicates the end mill cutting edge has a protective chamfer.



Rake angle



Helix angle

Indicates the helix angle of the end mill.



Point angle

Indicates the drill point angle.



Roughing flute geometry



Variable helix



Rounded gash



Corner angle

WEB THINNING



X type point geometry

X web thinning used at the drill point.



XR type point geometry

XR web thinning used at the drill point.



S type point geometry

Easy cutting geometry.



N type point geometry

Effective when the point web is thick.



Chipbreaker

SYMBOLS

TOLERANCES



Tolerance of taper angle
Indicates the tolerance of the taper angle.



R tolerance
Indicates the radial tolerance of a ball nose end mill.



R tolerance
Indicates the radial tolerance of the corner radius.



R tolerance
Indicates the radial tolerance of a cutter with a corner radius.



Outside diameter tolerance
Indicates the diameter tolerance of the end mill.



Peak tolerance
Indicates the tolerance for the end diameter.



Shank diameter tolerance



Shank diameter tolerance



Drill tolerance / diameter

COOLANT HOLES



External coolant



Internal coolant



Internal coolant



Centered, internal coolant hole



Radial, internal coolant holes



Internal coolant holes



Internal coolant holes

MEMO

EUROPEAN SALES COMPANIES

GERMANY

MITSUBISHI MATERIALS TOOLS EUROPE GMBH
Comeniusstr. 2 . 40670 Meerbusch
Phone +49 2159 91890 . Fax +49 2159 918966
Email admin@mmchg.de

UK Office

MMC HARDMETAL UK LTD
1 Centurion Court, Centurion Way
Tamworth, B77 5PN
Phone +44 1827 312312
Email sales@mitsubishicarbide.co.uk

UK Deliveries / Returns

Unit 4 B5K Business Park, Quartz Close
Tamworth, B77 4GR

SPAIN

MITSUBISHI MATERIALS ESPAÑA, S.A.
Calle Emperador 2 . 46136 Museros / Valencia
Phone +34 96 1441711
Email comercial@mmevalencia.es

FRANCE

MMC METAL FRANCE S.A.R.L.
6, Rue Jacques Monod . 91400 Orsay
Phone +33 1 69 35 53 53 . Fax +33 1 69 35 53 50
Email mmfsales@mmc-metal-france.fr

POLAND

MMC HARDMETAL POLAND SP. Z O.O.
Al. Armii Krajowej 61 . 50-541 Wrocław
Phone +48 71335 1620 . Fax +48 71335 1621
Email sales@mitsubishicarbide.com.pl

ITALY

MMC ITALIA S.R.L.
Viale Certosa 144 . 20156 Milano
Phone +39 0293 77031 . Fax +39 0293 589093
Email info@mmc-italia.it

TURKEY

MITSUBISHI MATERIALS TOOLS EUROPE GMBH ALMANYA İZMİR MERKEZ ŞUBESİ
Adalet Mahallesi Anadolu Caddesi No: 41-1 . 15001 35530 Bayraklı / İzmir
Phone +90 232 5015000 . Fax +90 232 5015007
Email info@mmchg.com.tr

www.mmc-carbide.com

DISTRIBUTED BY:

┌

┐

└

┘