


BC8200 / MB8200 SERIES


THE NEXT GENERATION OF COATED AND UNCOATED
PCBN GRADES FOR MACHINING HARDENED STEELS

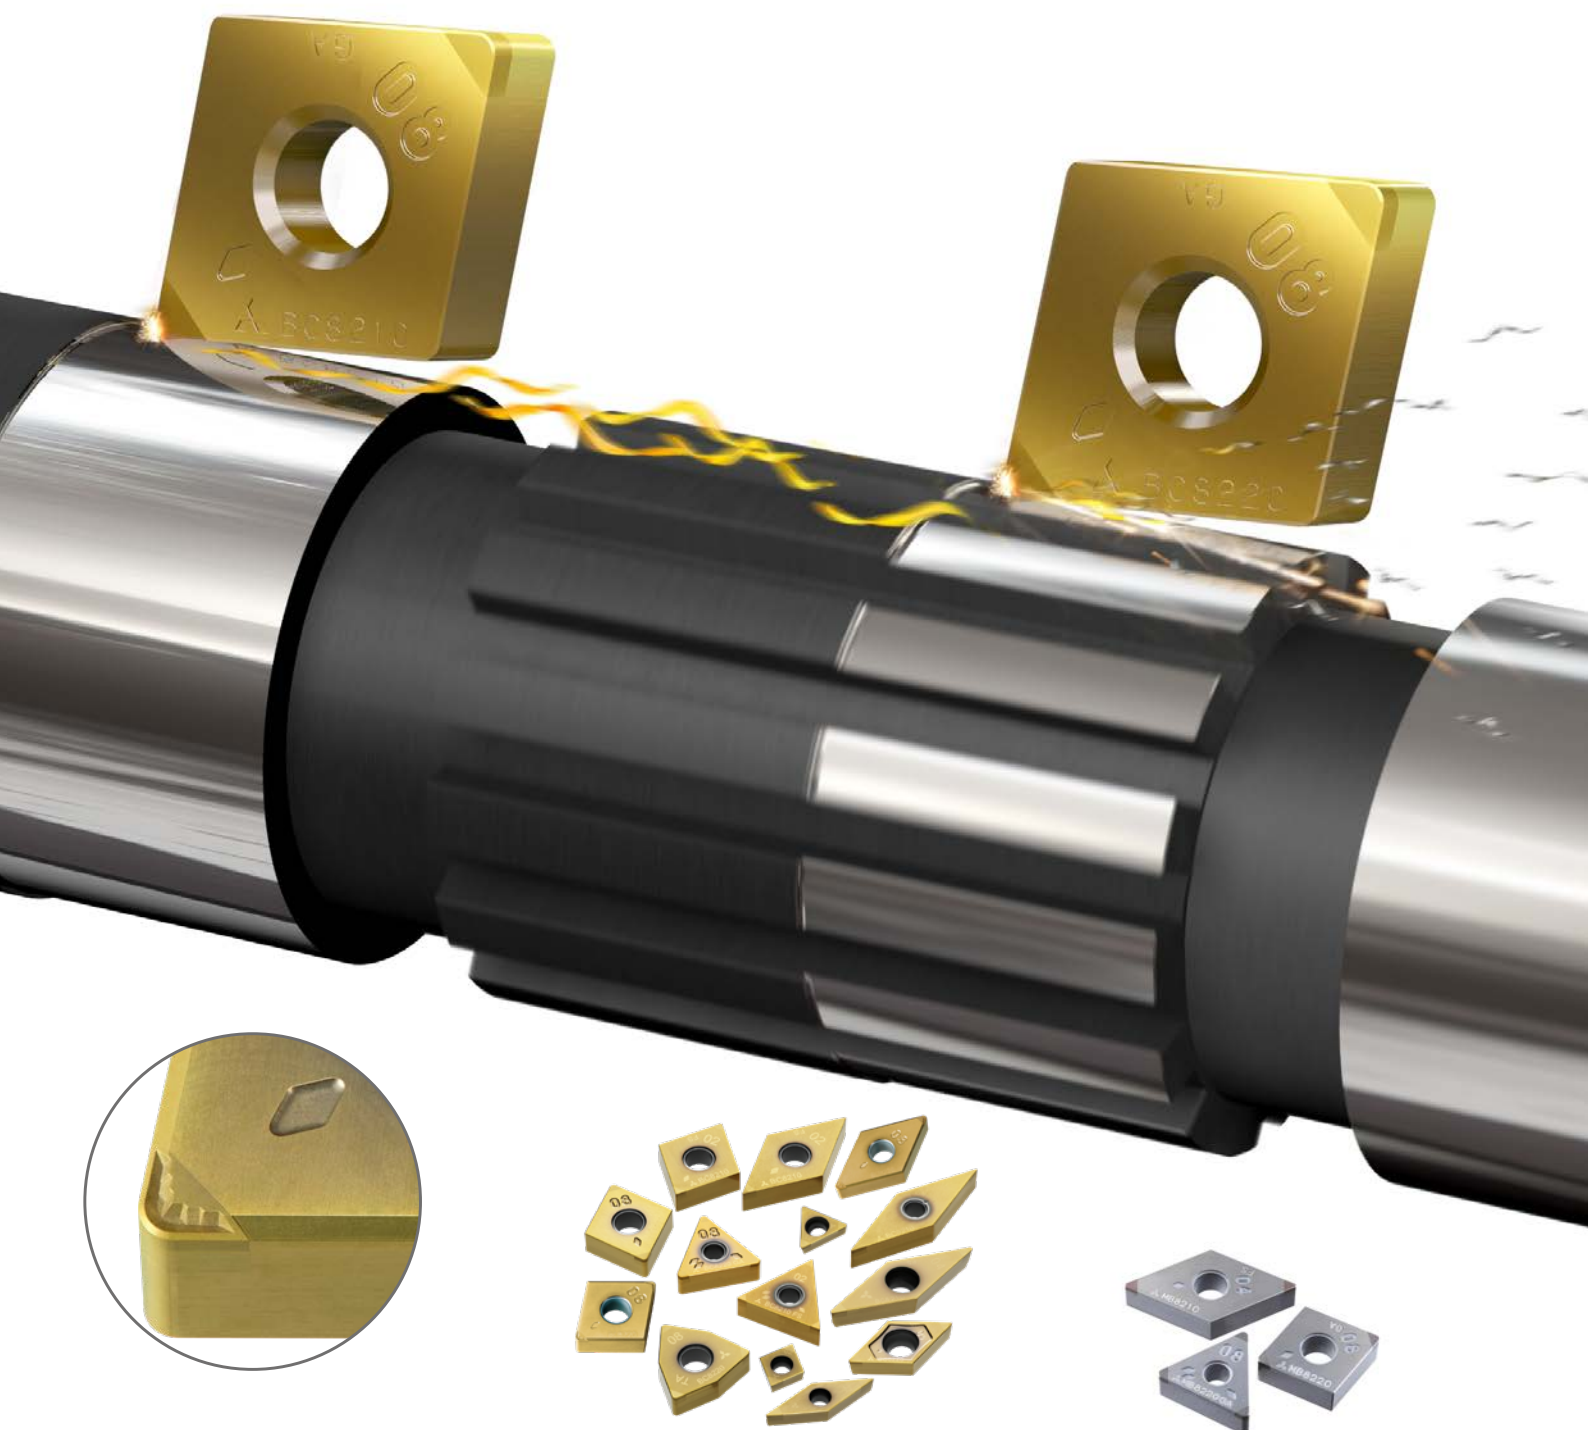

BC8200 SERIES

BC8210

FOR CONTINUOUS AND LIGHT INTERRUPTED CUTTING

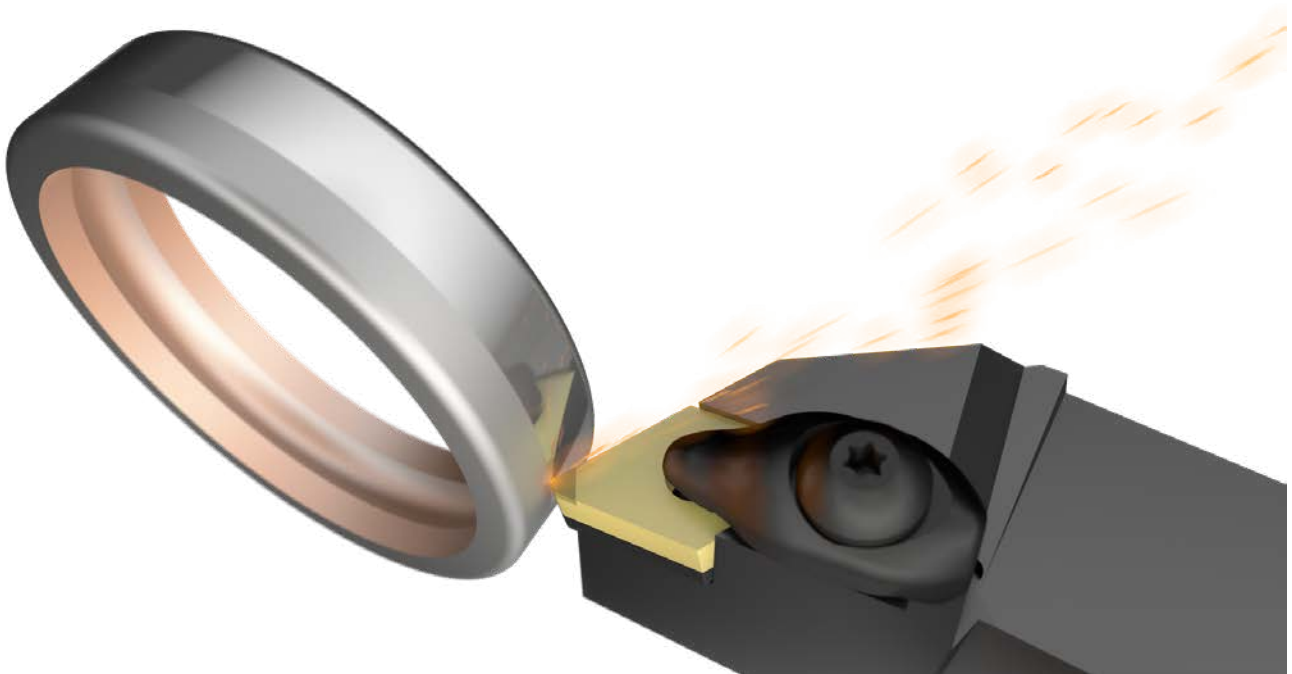

HIGH-SPEED MACHINING WITH OUTSTANDING TOOL LIFE

Suitable for continuous through to light interrupted cutting. BC8210 exhibits excellent chipping, flank and crater wear resistance, thereby providing a stable machining process at high speed cutting conditions.

NEW PVD COATING FOR LONG TOOL LIFE


A combination of the newly developed AlCrSiN-base coating that absorbs impacts, and the TiAlSiN-base coating which has excellent wear resistance, provide stability during continuous through to low interrupted cutting applications.



BC8200 SERIES

BC8220

FOR GENERAL APPLICATIONS

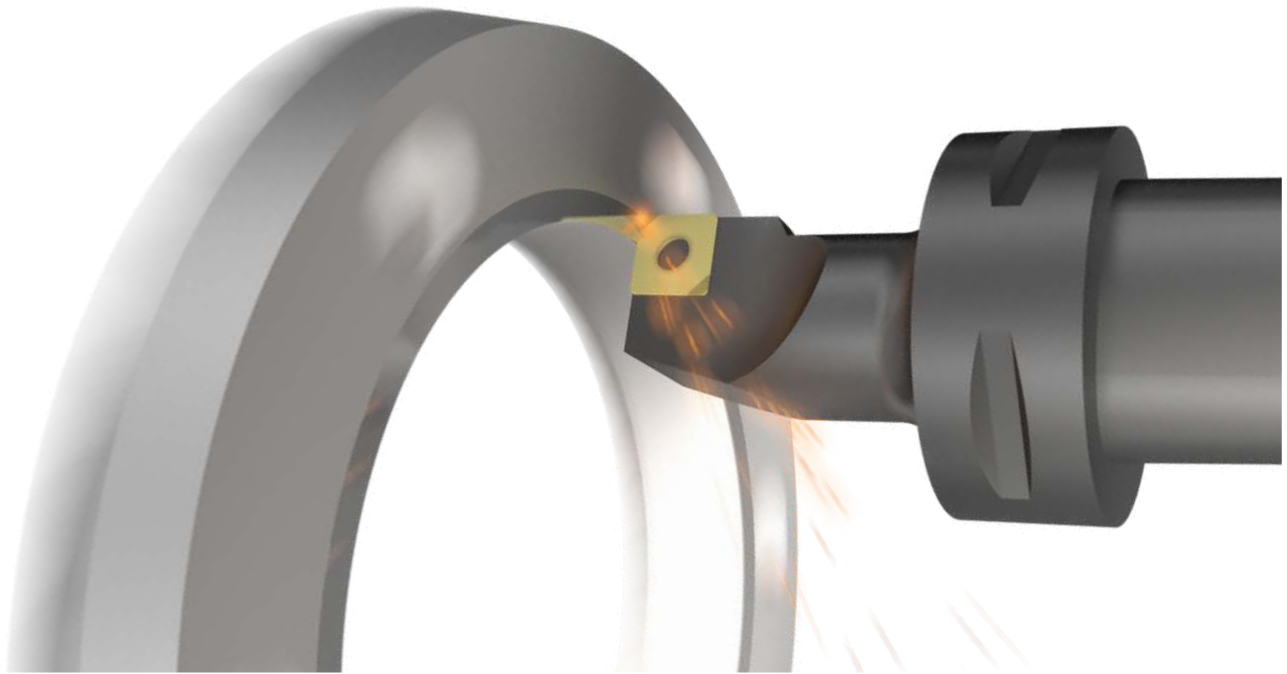

ACHIEVES IMPRESSIVE TOOL LIFE OVER A WIDE RANGE OF CUTTING CONDITIONS

Highly suited to a wide application area from continuous through to heavy interrupted cutting. It also has excellent crater wear and fracture resistance due to the new PcBN base material and together with a new coating, tool life is dramatically extended.

NEW PVD COATING WITH IDEAL BALANCE OF WEAR AND CHIPPING RESISTANCE

BC8220 utilises a new specially developed, super multi-layer PVD coating. The high level of both chipping and wear resistance is achieved by a much improved adhesion between the substrate and coating. Together with the easy identification of edges used due to the gold coloured TiN top coating layer, BC8220 achieves high performance and reliability over a wide range of hardened steel machining applications.





BC8210

CUTTING PERFORMANCE

COMPARISON OF CONTINUOUS CUTTING

BC8210 reduces flank wear and maintains good surface finishes.

Insert	NP-CNGA120408GS2 BC8210
Material	DIN 20Cr4
Vc (m/min)	200
f (mm/rev)	0.1
ap (mm)	0.2
Cutting mode	Dry cutting

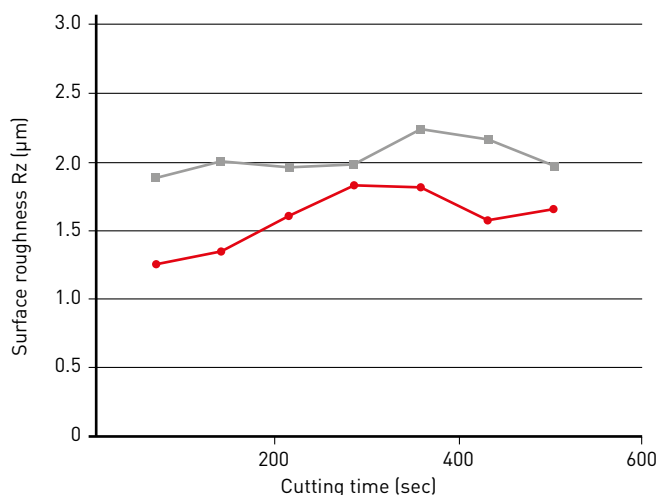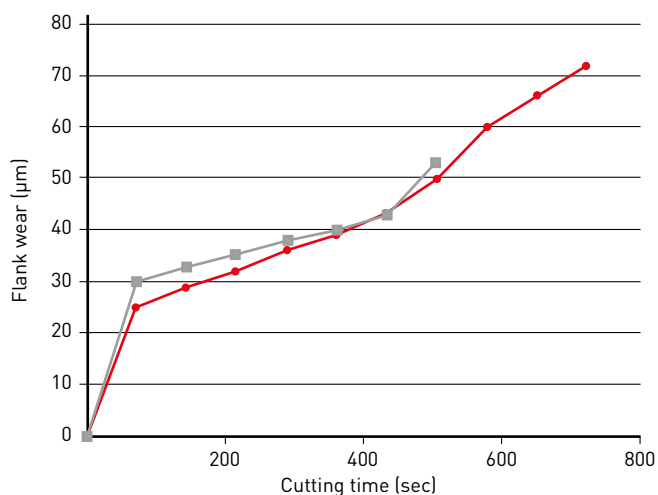

COMPARISON OF LIGHT INTERRUPTED CUTTING


BC8210 provides excellent chipping resistance.

Insert	NP-CNGA120408VA2 BC8210
Material	DIN 20Cr4
Vc (m/min)	160
f (mm/rev)	0.1
ap (mm)	0.2
Cutting mode	Dry cutting


CHIPPING AFTER MACHINING 360 SECONDS



BC8210



Conventional

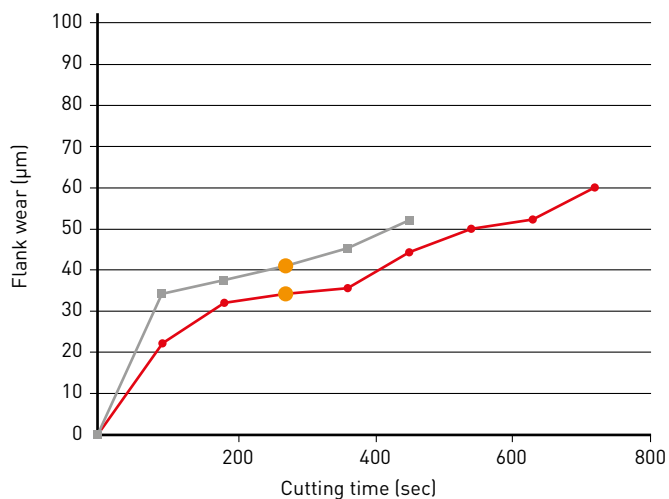

BC8220

CUTTING PERFORMANCE

COMPARISON OF FRACTURE RESISTANCE DURING MEDIUM INTERRUPTED CUTTING


BC8220 has excellent chipping and fracture resistance.

Insert	NP-CNGA120408VA2 BC8220
Material	DIN 20Cr4
Vc (m/min)	250
f (mm/rev)	0.15
ap (mm)	0.1
Cutting mode	Dry cutting


FRACTURE AFTER MACHINING 210 SECONDS



BC8220



Conventional

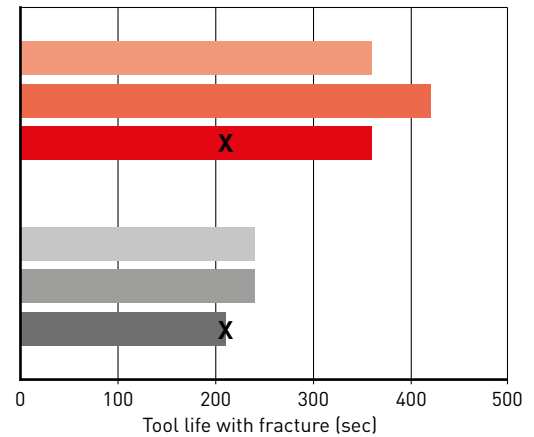

COMPARISON OF FRACTURE RESISTANCE DURING HEAVY INTERRUPTED CUTTING


BC8220 has improved chipping resistance when compared to conventional products.

Insert	NP-CNGA120408VA2 BC8220
Material	DIN 20Cr4
Vc (m/min)	200
f (mm/rev)	0.05
ap (mm)	0.1
Cutting mode	Wet cutting


CHIPPING AFTER MACHINING 180 SECONDS



BC8220




Conventional

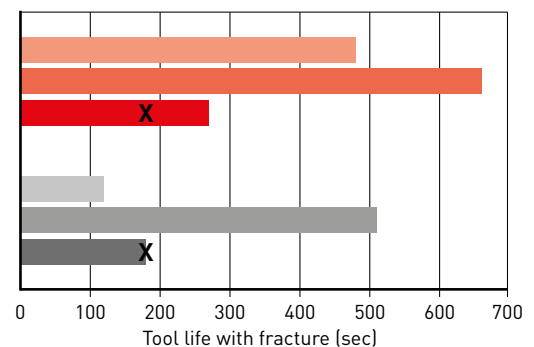

BC8200 SERIES


BC8200 COATED PCBN SERIES

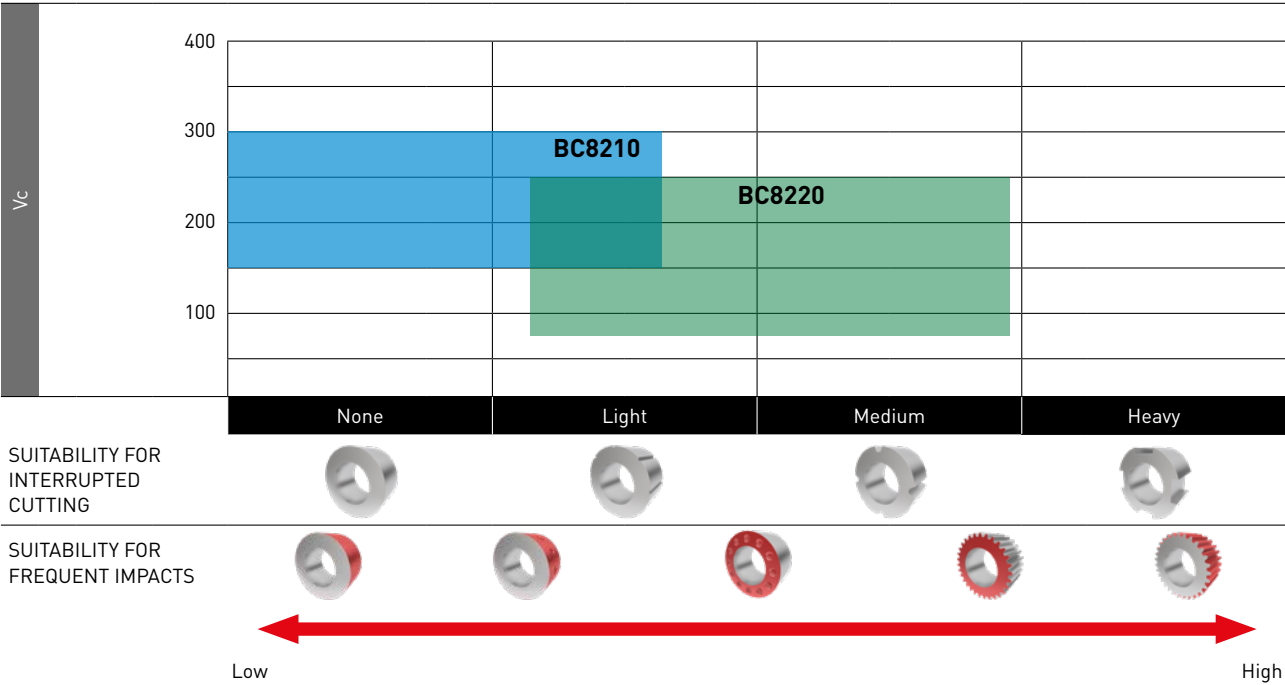

BC8200 SERIES

EDGE PREPARATION (HONING)

A wide variety of cutting edge preparations are available for all applications.
VA honing type with improved fracture resistance for high speeds and feeds.

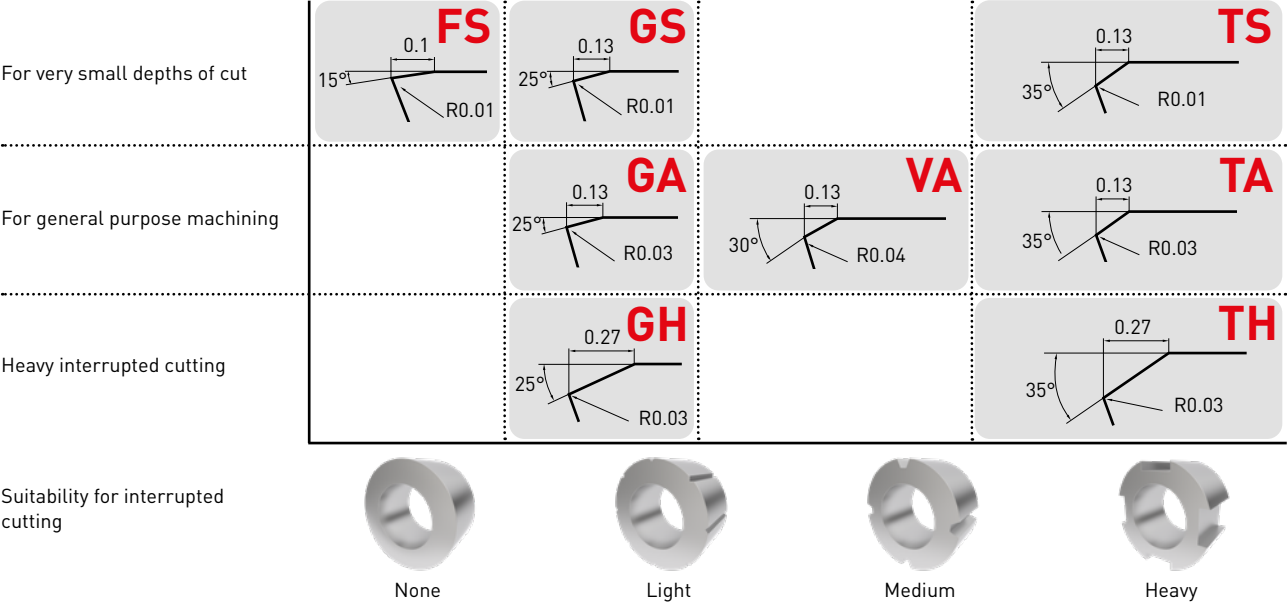


	Continuous cutting	General purpose		For fracture resistance	Interrupted cutting	
	General cutting	General cutting	High feed and depth	High speed and feed	General cutting	High feed and depth
BC8210	FS	GS	GH		TS	
BC8220		GA	GH	VA	TA	TH

MB8200 SERIES


UNCOATED PCBN GRADE FOR TURNING HARDENED STEEL

DISPLAYS EXCELLENT CUTTING PERFORMANCE DURING MEDIUM INTERRUPTED MACHINING

RECOMMENDED MACHINING

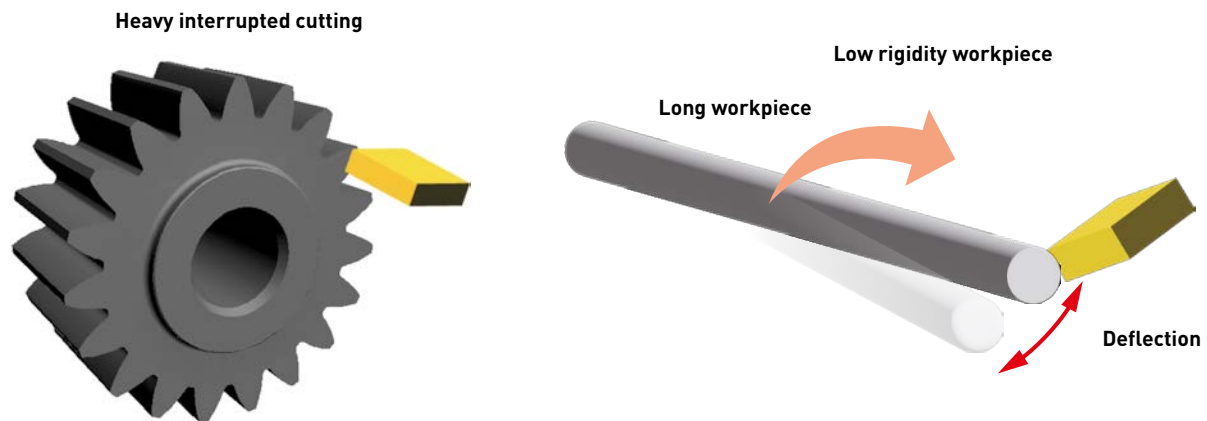

RECOMMENDED APPLICATION AREA

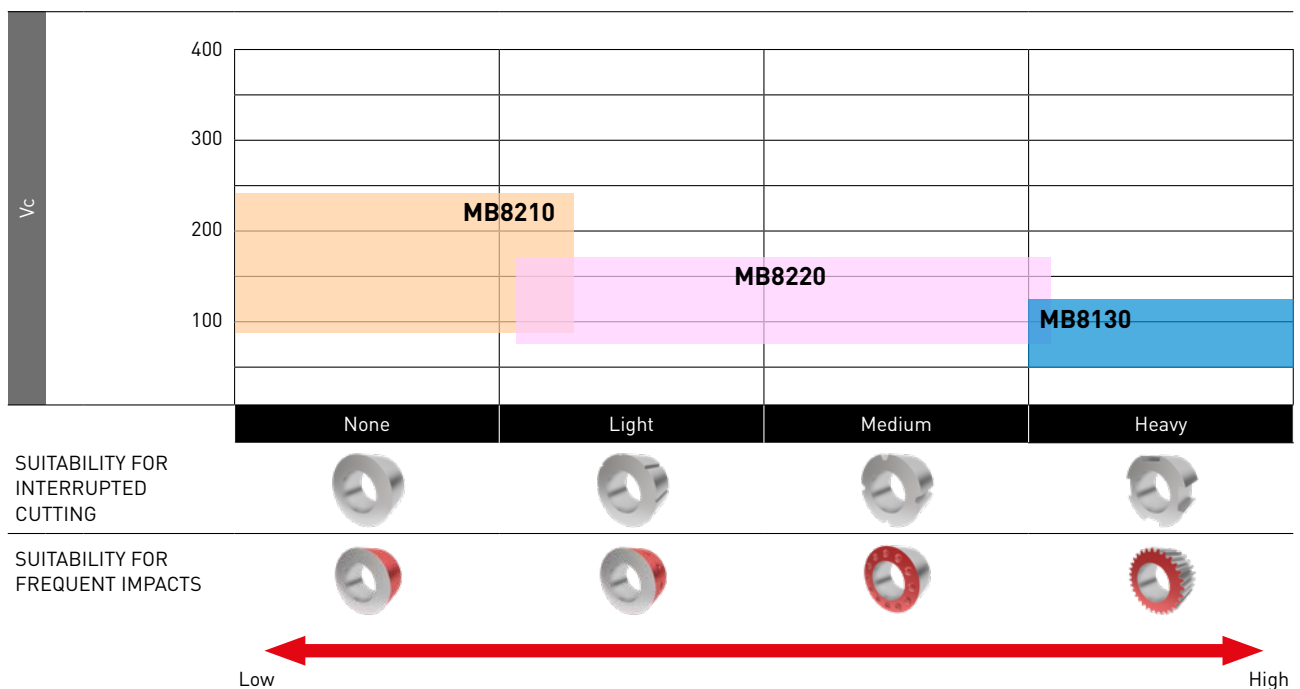

MB8210

Enables stable machining during continuous and light intermittent cutting of low rigidity applications.

MB8220



Displays excellent cutting performance during medium interrupted machining.

BC8200 SERIES

FEATURES OF THE INSERT

CHIPBREAKER

The new BL chipbreaker provides good chip control at medium to light depths of cut. A versatile range of chipbreakers are available for a wide range of applications.

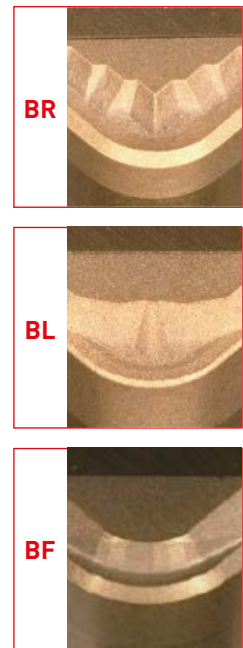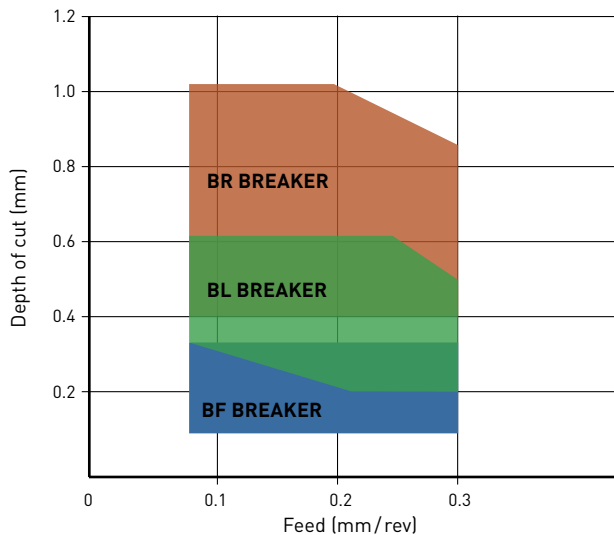



Breaker system for excellent chip control when finishing, removing carburized layers, high load machining and for hard-soft machining.

BL BREAKER (BC8220)


It exhibits excellent chip control performance at cutting depths of 0.2 to 0.6 mm. Combined with the dedicated honing, a low resistance cutting edge is created that suppresses chatter and vibration.

Cutting Performance


Material	20Cr4 (60HRC)
Insert	BL-CNGM120412TN2
Vc (m/min)	150
f (mm/rev)	0.2
ap (mm)	0.4
Cutting mode	Dry cutting

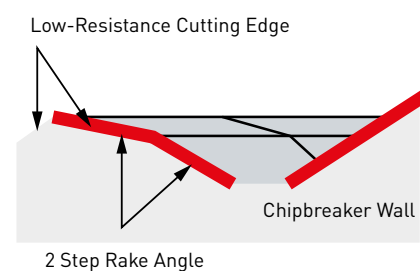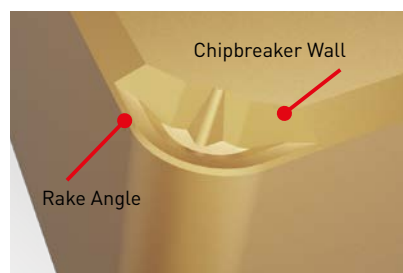

CONDITION OF THE FINISHED SURFACE



BL



Conventional A



Conventional B

CHIP SHAPE



BL



Conventional A



Conventional B

BC8200 SERIES

FEATURES OF THE INSERT



BR BREAKER (BC8220)

A reduced number of passes needed and improved chip control during high depths of cut. Chips are formed with the effect from the rake angle and the multi stage breaker wall supports a wide range of cuts.

Recommended cutting conditions:

Vc (m/min)	80 – 200
f (mm/rev)	<0.3
ap (mm)	0.6 – 1.0


Rake angle

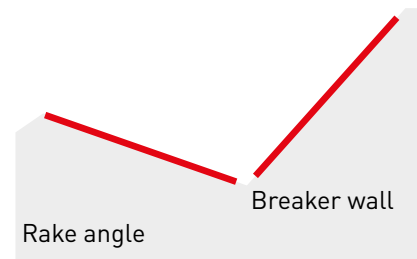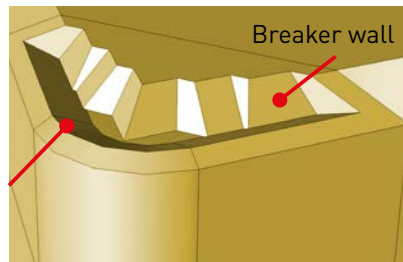

Achieves ideal chip control even at high depths of cut.

Cutting Performance

Material	DIN 20Cr4 (60 HRC)
Insert	BR-CNGM120408TA2
Vc (m/min)	200
f (mm/rev)	0.1 / 0.3
ap (mm)	0.6 / 1.0
Cutting mode	Dry cutting


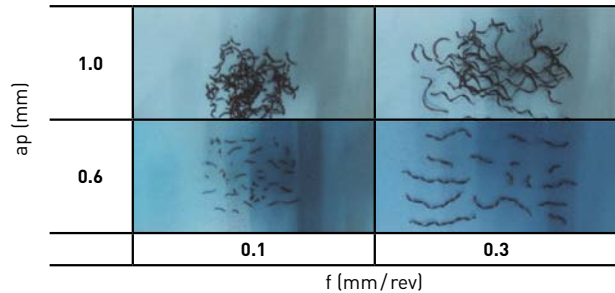


BM BREAKER (BC8220)

Great chip control when machining at medium depths of cut. (0.3–0.8 mm)


Recommended cutting conditions:

Vc (m/min)	80 – 200
f (mm/rev)	<0.3
ap (mm)	0.3–0.8

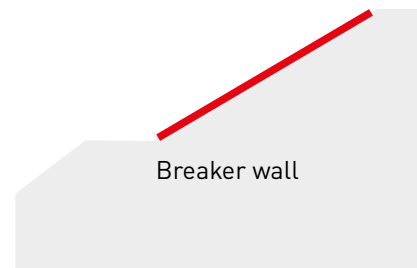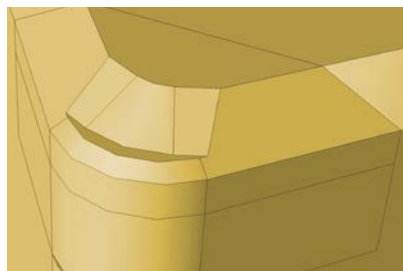

Cutting Performance

Material	DIN 15Cr3 (60 HRC)
Insert	BM-CNGM120408TA2
Vc (m/min)	160
f (mm/rev)	0.1 / 0.3
ap (mm)	0.4 / 0.8
Cutting mode	Dry cutting

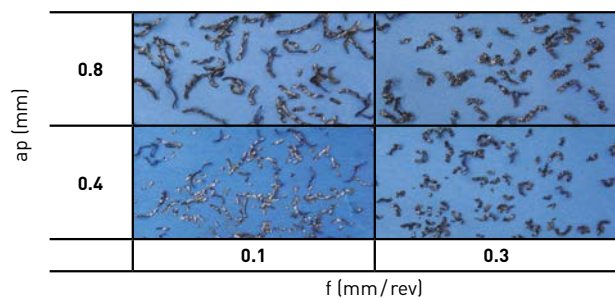

BC8200 SERIES



FEATURES OF THE INSERT

BF BREAKER (BC8210, BC8220)


Achieves excellent chip control while finish cutting at depths of 0.3 mm or less.

Recommended cutting conditions:

Vc (m/min)	80 – 200
f (mm/rev)	<0.3
ap (mm)	0.1 – 0.3

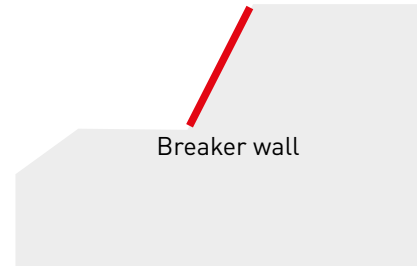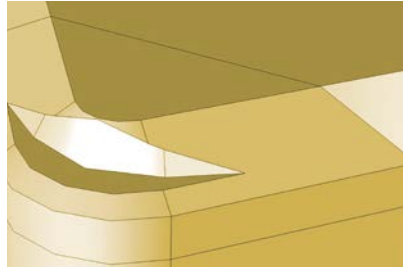


External turning

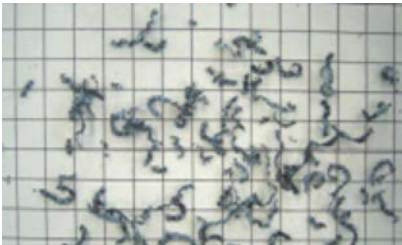

Vc (m/min)	100
f (mm/rev)	0.3
ap (mm)	0.2

Boring

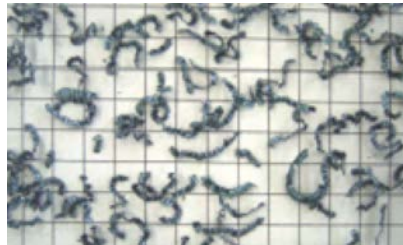

Vc (m/min)	120
f (mm/rev)	0.3
ap (mm)	0.2

Cutting Performance

Material	DIN 15Cr3 (60 HRC)
Insert	BF-CNGM120408TS2
Cutting mode	Dry cutting


BC8200 / MB8200 SERIES

OPTIMISED SUBSTRATE TECHNOLOGY

PCBN SUBSTRATE FEATURING TOUGHNESS AND CRATER WEAR RESISTANCE

The PcBN substrate contains a ultra-fine grain, heat resistant binder. This suppresses both chipping and crater wear and promotes longer tool life.

BC8200 / BC8100 SERIES

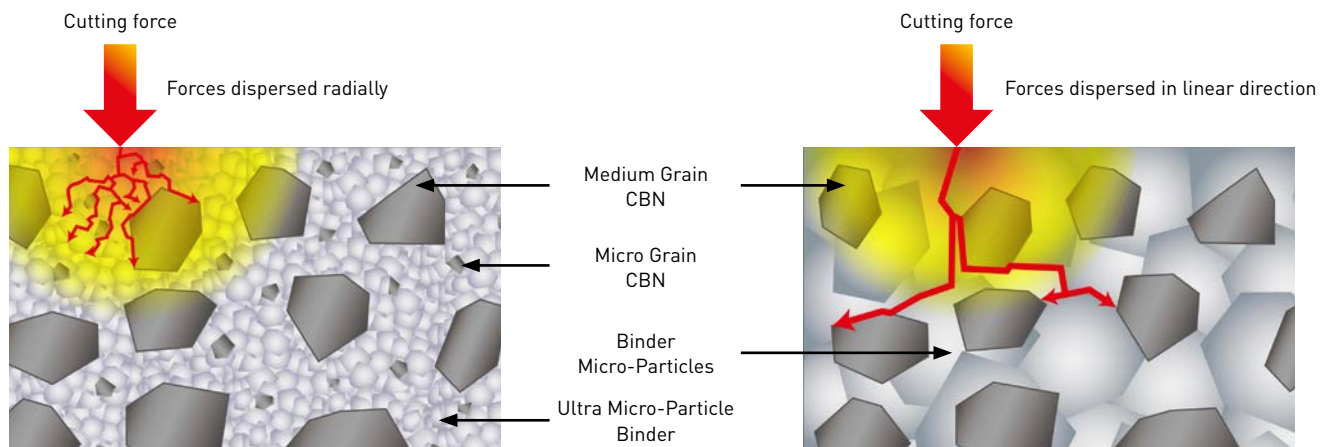


The ultra micro-particle binder for coated and uncoated PcBN inserts prevents linear crack development to avoid sudden fracturing.

POSITIVE EFFECT OF THE NEWLY DEVELOPED, HEAT RESISTANT BINDER

The progress of crater wear is greatly reduced due to the use of a heat resistant binder. This suppresses chipping, crater wear and fracturing.


BC8200 / MB8200 SERIES

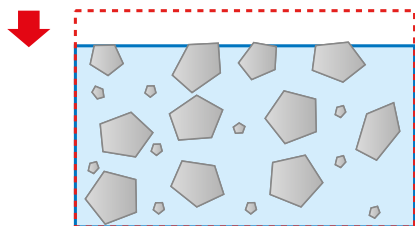

Reduce crater wear

Suppresses the binder wear caused by cutting heat.

CONVENTIONAL

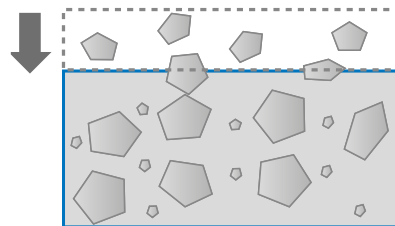


Crater wear progress

As binder wear progresses, the CBN particles are exposed and lost.

BC8200 / MB8200 SERIES

Small crater wear




Crater wear


Small Large

CONVENTIONAL

Large crater wear



WIPER INSERT



IMPROVING SURFACE FINISHES

Under the same machining conditions as conventional breakers, but with the feed rate increased, the surface finish of the workpiece can be improved.

MORE EFFICIENCY

High feed rates not only shorten machining times, but also make it possible to combine roughing and finishing operations.

INCREASED TOOL LIFE

When using in high feed conditions, the time required to cut one component is decreased, thus more parts can be machined with each insert. In addition, the high feed rate prevents rubbing which delays the progression of wear, thereby increasing tool life.

BETTER CHIP CONTROL


Under high feed conditions, the chips generated become thicker and are more easily broken, thereby improving chip control.

RECOMMENDED CUTTING CONDITIONS AND PERFORMANCE


HIGH PRECISION FINISHING

Without wiper

With wiper



$R_y = 3.2 \mu\text{m}$




$R_y = 1.0 \mu\text{m}$

V_c (m/min)	100
f (mm/rev)	0.1
a_p (mm)	0.1
Cutting mode	Dry cutting


HIGH FEED MACHINING

Without wiper

With wiper




$R_y = 12.2 \mu\text{m}$




$R_y = 1.2 \mu\text{m}$

V_c (m/min)	100
f (mm/rev)	0.3
a_p (mm)	0.1
Cutting mode	Dry cutting

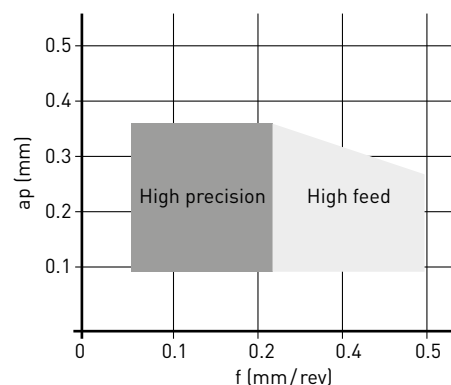

CUTTING PERFORMANCE

Insert	NP-CNGA120408
Material	Hardened steel (HRC60)
Cutting mode	Continuous
V_c (m/min)	120
f (mm/rev)	Various
a_p (mm)	0.1
Cutting mode	Dry cutting

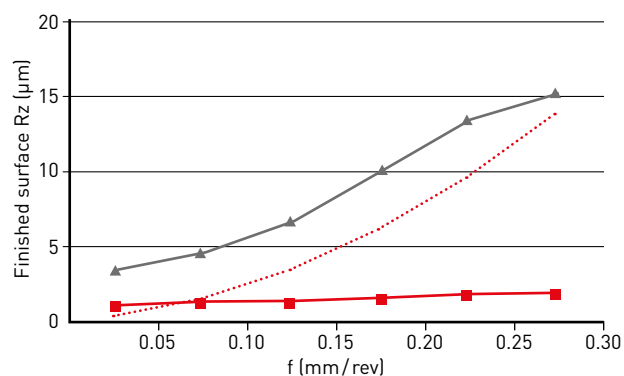


- WL-Wiper
- ▲ No wiper
- Theoretical finished surface roughness

COMBINATION OF BF BREAKER AND WS WIPER INSERT


CNGM and DNGM types are now available with new inserts that combine a BF chipbreaker with a WS wiper Insert (BF-CNGM120408TSWS2). It is effective for chip control and improvement of finished surface roughness without concern about the hand of the tool even during continuous external turning or internal turning and facing.

Effect of chipbreaker and wiper insert

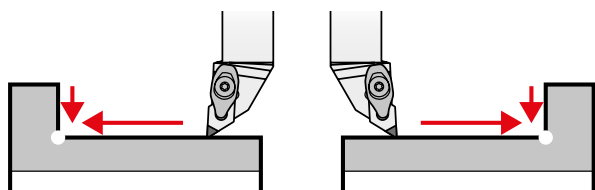


Demonstrates the effects of breaker and wiper Insert in both right handed and left handed cutting.

BF CHIPBREAKER



WS Wiper Insert (Neutral)
BF-CNGM120408TSWS2

BF CHIPBREAKER




WS Wiper Insert (Neutral)
BF-DNGM150412TWS2

NOTES FOR USE

WHEN USING A CNGM TYPE

No Restriction for Holders


A standard holder can be used.
[*A double clamp, high rigidity tool is recommended.]

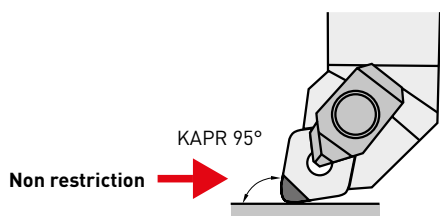



WHEN USING A DNGM TYPE

Restriction for Holders

Use a PDJN holder or DDJN holder with an cutting angle of 93° for improving wiper efficiency. There is no wiper efficiency with other cutting angles (60°, 90°, 107° etc.).



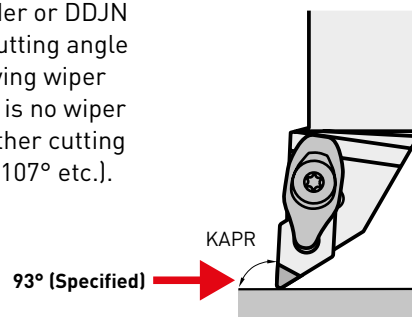


Displays great wiper efficiency when machining the end face and outer diameter in both right-hand and left-hand machining.

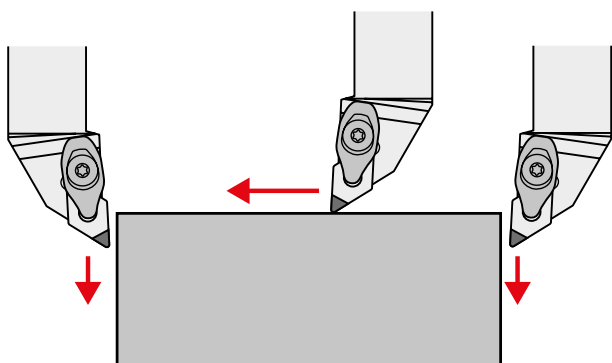


* The DNGM type is not suitable for machining the R that connects the end face and the outer diameter because it will leave uncut parts.



IDENTIFICATION

BF – CNGM 120404 TA WS 2 --			
Insert shape		Insert size	
Number of cutting edges			
Insert geometry	Cutting edge preparation	Wiper	Cutting direction*
BR For high depth of cut chipbreaker	FS Continuous cutting	WS With wiper	Figure Symbol  JR Right
BL For medium depth of cut chipbreaker	GS General cutting	No mark Without wiper	Figure Symbol  JL Left
BM For finish cutting chipbreaker	GA General cutting		
BF For finish cutting chipbreaker	GH General cutting		
NP New petit cut	VA For high speed, High feed cutting		Figure Symbol  No mark Neutral
	TS Interrupted cutting		
	TA Interrupted cutting		
	TH Interrupted cutting		

CNGA, CNGM

NEGATIVE INSERTS (WITH HOLE)

Order number	BC8210	BC8220	NEW MB8210	NEW MB8220	ZEFF	IC	S	RE	D1	LE	Geometry
NP-CNGA120404GA4		●			4	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408GA4		●			4	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412GA4		●			4	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120404GS4	●				4	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408GS4	●				4	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412GS4	●				4	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120404GH4	★	★			4	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408GH4	★	★			4	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412GH4	●	★			4	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120404FS4	★				4	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408FS4	★				4	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412FS4	★				4	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120404VA4		●			4	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408VA4		●			4	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412VA4		●			4	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120404TA4		★			4	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408TA4		●			4	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412TA4		★			4	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120404TS4	★				4	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408TS4	★				4	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412TS4	★				4	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120408TH4		★			4	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412TH4		★			4	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120404FSWS4	●				4	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408FSWS4	●				4	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412FSWS4	●				4	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120404GAWS4		●			4	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408GAWS4		●			4	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412GAWS4		●			4	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120404GSWS4	●				4	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408GSWS4	●				4	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412GSWS4	●				4	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120402GA2		★			2	12.7	4.76	0.2	5.16	1.7	
NP-CNGA120404GA2	●	●		●	2	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408GA2	●	●		●	2	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412GA2	●	●		●	2	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120402GS2	★				2	12.7	4.76	0.2	5.16	1.7	
NP-CNGA120404GS2	●	●			2	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408GS2	●	●			2	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412GS2	●	●			2	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120404GH2	★	★			2	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408GH2	★	★			2	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412GH2	●	★			2	12.7	4.76	1.2	5.16	2.2	





1/2

● / ★ = Expansion

● : Inventory maintained. ★ : Inventory maintained in Japan.

CNGA, CNGM – NEGATIVE INSERTS (WITH HOLE)


Order number	BC8210	BC8220	NEW MB8210	NEW MB8220	ZEFF	IC	S	RE	D1	LE	Geometry
NP-CNGA120402FS2	★	●	●		2	12.7	4.76	0.2	5.16	1.7	
NP-CNGA120404FS2	●	●	●		2	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408FS2	●	●	●		2	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412FS2	●	●	●		2	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120404VA2		●			2	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408VA2		●			2	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412VA2		●			2	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120404TA2	●	●			2	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408TA2	●	●			2	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412TA2	●	●			2	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120404TS2	●	●			2	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408TS2	●	●			2	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412TS2	●	●			2	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120408TH2	●	★			2	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412TH2	●	★			2	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120404FSWS2	●		●		2	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408FSWS2	●		●		2	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412FSWS2	●		●		2	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120404GAWS2		●		●	2	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408GAWS2		●		★	2	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412GAWS2		●		●	2	12.7	4.76	1.2	5.16	2.2	
NP-CNGA120404GSWS2	●				2	12.7	4.76	0.4	5.16	1.8	
NP-CNGA120408GSWS2	●				2	12.7	4.76	0.8	5.16	2.0	
NP-CNGA120412GSWS2	●				2	12.7	4.76	1.2	5.16	2.2	
BF-CNGM120408TAWS2		●			2	12.7	4.76	0.8	5.16	2.0	
BF-CNGM120412TAWS2		●			2	12.7	4.76	1.2	5.16	2.2	
BF-CNGM120404TS2	●				2	12.7	4.76	0.4	5.16	1.8	
BF-CNGM120408TS2	●				2	12.7	4.76	0.8	5.16	2.0	
BF-CNGM120412TS2	●				2	12.7	4.76	1.2	5.16	2.2	
BF-CNGM120408TSWS2	●				2	12.7	4.76	0.8	5.16	2.0	
BF-CNGM120412TSWS2	●				2	12.7	4.76	1.2	5.16	2.2	
NEW BL-CNGM120404TN2		●			2	12.7	4.76	0.4	5.16	1.8	
NEW BL-CNGM120408TN2		●			2	12.7	4.76	0.8	5.16	2.0	
NEW BL-CNGM120412TN2		●			2	12.7	4.76	1.2	5.16	2.2	
BM-CNGM120404TA2		●			2	12.7	4.76	0.4	5.16	1.8	
BM-CNGM120408TA2		●			2	12.7	4.76	0.8	5.16	2.0	
BM-CNGM120412TA2		●			2	12.7	4.76	1.2	5.16	2.2	
BR-CNGM120404TA2		●			2	12.7	4.76	0.4	5.16	1.8	
BR-CNGM120408TA2		●			2	12.7	4.76	0.8	5.16	2.0	
BR-CNGM120412TA2		●			2	12.7	4.76	1.2	5.16	2.2	

2/2

DNGA, DNGM



NEGATIVE INSERTS (WITH HOLE)

Order number	BC8210	BC8220	NEW MB8210	NEW MB8220	ZEFF	IC	S	RE	D1	LE	Geometry
NP-DNGA150404GA4		★			4	12.7	4.76	0.4	5.16	2.1	
NP-DNGA150408GA4		★			4	12.7	4.76	0.8	5.16	2.0	
NP-DNGA150412GA4		★			4	12.7	4.76	1.2	5.16	1.8	
NP-DNGA150604GA4		●			4	12.7	6.35	0.4	5.16	2.1	
NP-DNGA150608GA4		●			4	12.7	6.35	0.8	5.16	2.0	
NP-DNGA150612GA4		●			4	12.7	6.35	1.2	5.16	1.8	
NP-DNGA150404GS4	★				4	12.7	4.76	0.4	5.16	2.1	
NP-DNGA150408GS4	★				4	12.7	4.76	0.8	5.16	2.0	
NP-DNGA150412GS4	★				4	12.7	4.76	1.2	5.16	1.8	
NP-DNGA150604GS4	●				4	12.7	6.35	0.4	5.16	2.1	
NP-DNGA150608GS4	●				4	12.7	6.35	0.8	5.16	2.0	
NP-DNGA150612GS4	●				4	12.7	6.35	1.2	5.16	1.8	
NP-DNGA150404GH4	★	★			4	12.7	4.76	0.4	5.16	2.1	
NP-DNGA150408GH4	★	★			4	12.7	4.76	0.8	5.16	2.0	
NP-DNGA150412GH4	★	★			4	12.7	4.76	1.2	5.16	1.8	
NP-DNGA150604GH4	★	★			4	12.7	6.35	0.4	5.16	2.1	
NP-DNGA150608GH4	★	★			4	12.7	6.35	0.8	5.16	2.0	
NP-DNGA150612GH4	★	★			4	12.7	6.35	1.2	5.16	1.8	
NP-DNGA150404FS4	★				4	12.7	4.76	0.4	5.16	2.1	
NP-DNGA150408FS4	★				4	12.7	4.76	0.8	5.16	2.0	
NP-DNGA150412FS4	★				4	12.7	4.76	1.2	5.16	1.8	
NP-DNGA150604FS4	★				4	12.7	6.35	0.4	5.16	2.1	
NP-DNGA150608FS4	★				4	12.7	6.35	0.8	5.16	2.0	
NP-DNGA150612FS4	★				4	12.7	6.35	1.2	5.16	1.8	
NP-DNGA150404VA4		★			4	12.7	4.76	0.4	5.16	2.1	
NP-DNGA150408VA4		★			4	12.7	4.76	0.8	5.16	2.0	
NP-DNGA150412VA4		★			4	12.7	4.76	1.2	5.16	1.8	
NP-DNGA150604VA4		★			4	12.7	6.35	0.4	5.16	2.1	
NP-DNGA150608VA4		★			4	12.7	6.35	0.8	5.16	2.0	
NP-DNGA150612VA4		★			4	12.7	6.35	1.2	5.16	1.8	
NP-DNGA150404TA4		★			4	12.7	4.76	0.4	5.16	2.1	
NP-DNGA150408TA4		★			4	12.7	4.76	0.8	5.16	2.0	
NP-DNGA150412TA4		★			4	12.7	4.76	1.2	5.16	1.8	
NP-DNGA150604TA4		★			4	12.7	6.35	0.4	5.16	2.1	
NP-DNGA150608TA4		★			4	12.7	6.35	0.8	5.16	2.0	
NP-DNGA150612TA4		★			4	12.7	6.35	1.2	5.16	1.8	




1/4

DNGA, DNGM – NEGATIVE INSERTS (WITH HOLE)

Order number	BC8210	BC8220	NEW MB8210	NEW MB8220	ZEFF	IC	S	RE	D1	LE	Geometry
NP-DNGA150404TS4	★				4	12.7	4.76		5.16	2.1	
NP-DNGA150408TS4	★				4	12.7	4.76	0.8	5.16	2.0	
NP-DNGA150412TS4	★				4	12.7	4.76	1.2	5.16	1.8	
NP-DNGA150604TS4	★				4	12.7	6.35	0.4	5.16	2.1	
NP-DNGA150608TS4	★				4	12.7	6.35	0.8	5.16	2.0	
NP-DNGA150612TS4	★				4	12.7	6.35	1.2	5.16	1.8	
NP-DNGA150408TH4		★			4	12.7	4.76	0.8	5.16	2.0	
NP-DNGA150412TH4		★			4	12.7	4.76	1.2	5.16	1.8	
NP-DNGA150608TH4		★			4	12.7	6.35	0.8	5.16	2.0	
NP-DNGA150612TH4		★			4	12.7	6.35	1.2	5.16	1.8	
NP-DNGA110408GA2		●		●	2	9.525	4.76	0.8	3.81	2.0	
NP-DNGA150402GA2		★			2	12.7	4.76	0.2	5.16	2.2	
NP-DNGA150404GA2	★	★		●	2	12.7	4.76	0.4	5.16	2.1	
NP-DNGA150408GA2	★	★		●	2	12.7	4.76	0.8	5.16	2.0	
NP-DNGA150412GA2	★	★		★	2	12.7	4.76	1.2	5.16	1.8	
NP-DNGA150604GA2	●	●			2	12.7	6.35	0.4	5.16	2.1	
NP-DNGA150608GA2	●	●			2	12.7	6.35	0.8	5.16	2.0	
NP-DNGA150612GA2	●	●			2	12.7	6.35	1.2	5.16	1.8	
NP-DNGA150402GS2	★				2	12.7	4.76	0.2	5.16	2.2	
NP-DNGA150404GS2	★	★			2	12.7	4.76	0.4	5.16	2.1	
NP-DNGA150408GS2	★	★			2	12.7	4.76	0.8	5.16	2.0	
NP-DNGA150412GS2	★	★			2	12.7	4.76	1.2	5.16	1.8	
NP-DNGA150604GS2	●	●			2	12.7	6.35	0.4	5.16	2.1	
NP-DNGA150608GS2	●	●			2	12.7	6.35	0.8	5.16	2.0	
NP-DNGA150612GS2	●	●			2	12.7	6.35	1.2	5.16	1.8	
NP-DNGA150404GH2	★	★			2	12.7	4.76	0.4	5.16	2.1	
NP-DNGA150408GH2	★	★			2	12.7	4.76	0.8	5.16	2.0	
NP-DNGA150412GH2	★	★			2	12.7	4.76	1.2	5.16	1.8	
NP-DNGA150604GH2	★	★			2	12.7	6.35	0.4	5.16	2.1	
NP-DNGA150608GH2	★	★			2	12.7	6.35	0.8	5.16	2.0	
NP-DNGA150612GH2	★	★			2	12.7	6.35	1.2	5.16	1.8	
NP-DNGA150402FS2	★		★		2	12.7	4.76	0.2	5.16	2.2	
NP-DNGA150404FS2	★	★	●		2	12.7	4.76	0.4	5.16	2.1	
NP-DNGA150408FS2	★	★	●		2	12.7	4.76	0.8	5.16	2.0	
NP-DNGA150412FS2	★	★	●		2	12.7	4.76	1.2	5.16	1.8	
NP-DNGA150604FS2	●	●			2	12.7	6.35	0.4	5.16	2.1	
NP-DNGA150608FS2	●	●			2	12.7	6.35	0.8	5.16	2.0	
NP-DNGA150612FS2	●	●			2	12.7	6.35	1.2	5.16	1.8	
NP-DNGA150404VA2		★			2	12.7	4.76	0.4	5.16	2.1	
NP-DNGA150408VA2		★			2	12.7	4.76	0.8	5.16	2.0	
NP-DNGA150412VA2		★			2	12.7	4.76	1.2	5.16	1.8	
NP-DNGA150604VA2		●			2	12.7	6.35	0.4	5.16	2.1	
NP-DNGA150608VA2		●			2	12.7	6.35	0.8	5.16	2.0	
NP-DNGA150612VA2		●			2	12.7	6.35	1.2	5.16	1.8	


2/4

DNGA, DNGM – NEGATIVE INSERTS (WITH HOLE)

Order number	BC8210	BC8220	NEW MB8210	NEW MB8220	ZEFF	IC	S	RE	D1	LE	Geometry
NP-DNGA150404TA2	★	★			2	12.7	4.76	0.4	5.16	2.1	
NP-DNGA150408TA2	★	★			2	12.7	4.76	0.8	5.16	2.0	
NP-DNGA150412TA2	★	★			2	12.7	4.76	1.2	5.16	1.8	
NP-DNGA150604TA2	●	●			2	12.7	6.35	0.4	5.16	2.1	
NP-DNGA150608TA2	●	●			2	12.7	6.35	0.8	5.16	2.0	
NP-DNGA150612TA2	●	●			2	12.7	6.35	1.2	5.16	1.8	
NP-DNGA150404TS2	★	★			2	12.7	4.76	0.4	5.16	2.1	
NP-DNGA150408TS2	★	★			2	12.7	4.76	0.8	5.16	2.0	
NP-DNGA150412TS2	★	★			2	12.7	4.76	1.2	5.16	1.8	
NP-DNGA150604TS2	●	●			2	12.7	6.35	0.4	5.16	2.1	
NP-DNGA150608TS2	●	●			2	12.7	6.35	0.8	5.16	2.0	
NP-DNGA150612TS2	●	●			2	12.7	6.35	1.2	5.16	1.8	
NP-DNGA150408TH2	★	★			2	12.7	4.76	0.8	5.16	2.0	
NP-DNGA150412TH2	★	★			2	12.7	4.76	1.2	5.16	1.8	
NP-DNGA150608TH2	●	★			2	12.7	6.35	0.8	5.16	2.0	
NP-DNGA150612TH2	●	★			2	12.7	6.35	1.2	5.16	1.8	
NP-DNGA150404AWS2JR		★			2	12.7	4.76	0.4	5.16	1.8	
NP-DNGA150404AWS2JL		★			2	12.7	4.76	0.4	5.16	1.8	
NP-DNGA150408AWS2JR		★			2	12.7	4.76	0.8	5.16	1.7	
NP-DNGA150408AWS2JL		★			2	12.7	4.76	0.8	5.16	1.7	
NP-DNGA150604AWS2JR		●			2	12.7	6.35	0.4	5.16	1.8	
NP-DNGA150604AWS2JL		●			2	12.7	6.35	0.4	5.16	1.8	
NP-DNGA150608AWS2JR		●			2	12.7	6.35	0.8	5.16	1.7	
NP-DNGA150608AWS2JL		●			2	12.7	6.35	0.8	5.16	1.7	
NP-DNGA150404GSWS2JR	★				2	12.7	4.76	0.4	5.16	1.8	
NP-DNGA150404GSWS2JL	★				2	12.7	4.76	0.4	5.16	1.8	
NP-DNGA150408GSWS2JR	★				2	12.7	4.76	0.8	5.16	1.7	
NP-DNGA150408GSWS2JL	★				2	12.7	4.76	0.8	5.16	1.7	
NP-DNGA150604GSWS2JR	●				2	12.7	6.35	0.4	5.16	1.8	
NP-DNGA150604GSWS2JL	●				2	12.7	6.35	0.4	5.16	1.8	
NP-DNGA150608GSWS2JR	●				2	12.7	6.35	0.8	5.16	1.7	
NP-DNGA150608GSWS2JL	●				2	12.7	6.35	0.8	5.16	1.7	

3/4

DNGA, DNGM – NEGATIVE INSERTS (WITH HOLE)

Order number	BC8210	BC8220	NEW MB8210	NEW MB8220	ZEFF	IC	S	RE	D1	LE	Geometry
BF-DNGM150408TAWs2		●			2	12.7	4.76	0.8	5.16	2.4	
BF-DNGM150412TAWs2		●			2	12.7	4.76	1.2	5.16	2.6	
BF-DNGM150404TS2	★				2	12.7	4.76	0.4	5.16	2.1	
BF-DNGM150408TS2	★				2	12.7	4.76	0.8	5.16	2.0	
BF-DNGM150412TS2	★				2	12.7	4.76	1.2	5.16	1.8	
BF-DNGM150408TSWS2	★				2	12.7	4.76	0.8	5.16	2.4	
BF-DNGM150412TSWS2	★				2	12.7	4.76	1.2	5.16	2.6	
NEW BL-DNGM150404TN2		●			2	12.7	4.76	0.4	5.16	2.1	
NEW BL-DNGM150408TN2		●			2	12.7	4.76	0.8	5.16	2.0	
NEW BL-DNGM150412TN2		●			2	12.7	4.76	1.2	5.16	1.8	
BM-DNGM150404TA2	★				2	12.7	4.76	0.4	5.16	2.1	
BM-DNGM150408TA2	★				2	12.7	4.76	0.8	5.16	2.0	
BM-DNGM150412TA2	★				2	12.7	4.76	1.2	5.16	1.8	
BR-DNGM150404TA2		●			2	12.7	4.76	0.4	5.16	2.1	
BR-DNGM150408TA2	★				2	12.7	4.76	0.8	5.16	2.0	
BR-DNGM150412TA2	★				2	12.7	4.76	1.2	5.16	1.8	
BR-DNGM150604TA2		●			2	12.7	6.35	0.4	5.16	2.1	
BR-DNGM150608TA2		●			2	12.7	6.35	0.8	5.16	2.0	
BR-DNGM150612TA2		●			2	12.7	6.35	1.2	5.16	1.8	


4/4

● / ★ = Expansion

● : Inventory maintained. ★ : Inventory maintained in Japan.

SNGA

NEGATIVE INSERTS (WITH HOLE)



Order number	BC8210	BC8220	NEW MB8210	NEW MB8220	ZEFF	IC	S	RE	D1	LE	Geometry
NP-SNGA120408GA2		●		★	2	12.7	4.76	0.8	5.16	2.2	
NP-SNGA120412GA2		★		●	2	12.7	4.76	1.2	5.16	2.5	

1/1

31 

WNGA

NEGATIVE INSERTS (WITH HOLE)

Order number	BC8210	BC8220	NEW MB8210	NEW MB8220	ZEFF	IC	S	RE	D1	LE	Geometry
NP-WNGA080408GS6	●				6	12.7	4.76	0.8	5.16	2.0	
NP-WNGA080408FS6	★				6	12.7	4.76	0.8	5.16	2.0	
NP-WNGA080408TS6	★				6	12.7	4.76	0.8	5.16	2.0	
NP-WNGA080408GA3		★			3	12.7	4.76	0.8	5.16	2.0	
NP-WNGA080408GS3	★				3	12.7	4.76	0.8	5.16	2.0	
NP-WNGA080408FS3	★				3	12.7	4.76	0.8	5.16	2.0	
NP-WNGA080408TA3		★			3	12.7	4.76	0.8	5.16	2.0	
NP-WNGA080408TS3	★				3	12.7	4.76	0.8	5.16	2.0	
NP-WNGA080408GSWS3	●				3	12.7	4.76	0.8	5.16	2.0	

1/1

31 

● / ★ = Expansion

● : Inventory maintained. ★ : Inventory maintained in Japan.

TNGA, TNGM


NEGATIVE INSERTS (WITH HOLE)

Order number	BC8210	BC8220	NEW MB8210	NEW MB8220	ZEFF	IC	S	RE	D1	LE	Geometry
NP-TNGA160404GA6		●			6	9.525	4.76	0.4	3.81	1.6	
NP-TNGA160408GA6		●			6	9.525	4.76	0.8	3.81	1.7	
NP-TNGA160412GA6		●			6	9.525	4.76	1.2	3.81	1.9	
NP-TNGA160404GS6	●				6	9.525	4.76	0.4	3.81	1.6	
NP-TNGA160408GS6	●				6	9.525	4.76	0.8	3.81	1.7	
NP-TNGA160412GS6	●				6	9.525	4.76	1.2	3.81	1.9	
NP-TNGA160404GH6		★			6	9.525	4.76	0.4	3.81	1.6	
NP-TNGA160408GH6		★			6	9.525	4.76	0.8	3.81	1.7	
NP-TNGA160412GH6		★			6	9.525	4.76	1.2	3.81	1.9	
NP-TNGA160404FS6	★				6	9.525	4.76	0.4	3.81	1.6	
NP-TNGA160408FS6	★				6	9.525	4.76	0.8	3.81	1.7	
NP-TNGA160412FS6	★				6	9.525	4.76	1.2	3.81	1.9	
NP-TNGA160404VA6		★			6	9.525	4.76	0.4	3.81	1.6	
NP-TNGA160408VA6		★			6	9.525	4.76	0.8	3.81	1.7	
NP-TNGA160412VA6		★			6	9.525	4.76	1.2	3.81	1.9	
NP-TNGA160404TA6		★			6	9.525	4.76	0.4	3.81	1.6	
NP-TNGA160408TA6		★			6	9.525	4.76	0.8	3.81	1.7	
NP-TNGA160412TA6		★			6	9.525	4.76	1.2	3.81	1.9	
NP-TNGA160404TS6	★				6	9.525	4.76	0.4	3.81	1.6	
NP-TNGA160408TS6	★				6	9.525	4.76	0.8	3.81	1.7	
NP-TNGA160412TS6	★				6	9.525	4.76	1.2	3.81	1.9	
NP-TNGA160408TH6		★			6	9.525	4.76	0.8	3.81	1.7	
NP-TNGA160412TH6		★			6	9.525	4.76	1.2	3.81	1.9	
NP-TNGA160402GA3		★			3	9.525	4.76	0.2	3.81	1.5	
NP-TNGA160404GA3		●		★	3	9.525	4.76	0.4	3.81	1.6	
NP-TNGA160408GA3		●		●	3	9.525	4.76	0.8	3.81	1.7	
NP-TNGA160412GA3		★		●	3	9.525	4.76	1.2	3.81	1.9	
NP-TNGA160402GS3	★				3	9.525	4.76	0.2	3.81	1.5	
NP-TNGA160404GS3	★				3	9.525	4.76	0.4	3.81	1.6	
NP-TNGA160408GS3	★				3	9.525	4.76	0.8	3.81	1.7	
NP-TNGA160412GS3	★				3	9.525	4.76	1.2	3.81	1.9	
NP-TNGA160404GH3		★			3	9.525	4.76	0.4	3.81	1.6	
NP-TNGA160408GH3		★			3	9.525	4.76	0.8	3.81	1.7	
NP-TNGA160412GH3		★			3	9.525	4.76	1.2	3.81	1.9	
NP-TNGA160402FS3	★				3	9.525	4.76	0.2	3.81	1.5	
NP-TNGA160404FS3	●		●		3	9.525	4.76	0.4	3.81	1.6	
NP-TNGA160408FS3	●		●		3	9.525	4.76	0.8	3.81	1.7	
NP-TNGA160412FS3	●		●		3	9.525	4.76	1.2	3.81	1.9	

1/2

TNGA, TNGM – NEGATIVE INSERTS (WITH HOLE)

Order number	BC8210	BC8220	NEW MB8210	NEW MB8220	ZEFF	IC	S	RE	D1	LE
NP-TNGA160404VA3		★			3	9.525	4.76	0.4	3.81	1.6
NP-TNGA160408VA3		●			3	9.525	4.76	0.8	3.81	1.7
NP-TNGA160412VA3		★			3	9.525	4.76	1.2	3.81	1.9
NP-TNGA160404TA3		●			3	9.525	4.76	0.4	3.81	1.6
NP-TNGA160408TA3		●			3	9.525	4.76	0.8	3.81	1.7
NP-TNGA160412TA3		●			3	9.525	4.76	1.2	3.81	1.9
NP-TNGA160404TS3	●				3	9.525	4.76	0.4	3.81	1.6
NP-TNGA160408TS3	●				3	9.525	4.76	0.8	3.81	1.7
NP-TNGA160412TS3	●				3	9.525	4.76	1.2	3.81	1.9
NP-TNGA160408TH3		★			3	9.525	4.76	0.8	3.81	1.7
NP-TNGA160412TH3		★			3	9.525	4.76	1.2	3.81	1.9
NEW BL-TNGM160404TN3		★			3	9.525	4.76	0.4	3.81	1.6
NEW BL-TNGM160408TN3		★			3	9.525	4.76	0.8	3.81	1.7
NEW BL-TNGM160412TN3		★			3	9.525	4.76	1.2	3.81	1.9



2/2



31

● / ★ = Expansion

● : Inventory maintained. ★ : Inventory maintained in Japan.

VNGA, VNGM

NEGATIVE INSERTS (WITH HOLE)

Order number	BC8210	BC8220	NEW MB8210	NEW MB8220	ZEFF	IC	S	RE	D1	LE	Geometry
NP-VNGA160404GA4		●			4	9.525	4.76	0.4	3.81	2.5	
NP-VNGA160408GA4		●			4	9.525	4.76	0.8	3.81	2.0	
NP-VNGA160412GA4		●			4	9.525	4.76	1.2	3.81	1.5	
NP-VNGA160404GS4	★				4	9.525	4.76	0.4	3.81	2.5	
NP-VNGA160408GS4	●				4	9.525	4.76	0.8	3.81	2.0	
NP-VNGA160412GS4	★				4	9.525	4.76	1.2	3.81	1.5	
NP-VNGA160404GH4		★			4	9.525	4.76	0.4	3.81	2.5	
NP-VNGA160408GH4		★			4	9.525	4.76	0.8	3.81	2.0	
NP-VNGA160404FS4	★				4	9.525	4.76	0.4	3.81	2.5	
NP-VNGA160408FS4	★				4	9.525	4.76	0.8	3.81	2.0	
NP-VNGA160404VA4		★			4	9.525	4.76	0.4	3.81	2.5	
NP-VNGA160408VA4		★			4	9.525	4.76	0.8	3.81	2.0	
NP-VNGA160412VA4		★			4	9.525	4.76	1.2	3.81	1.5	
NP-VNGA160404TA4		★			4	9.525	4.76	0.4	3.81	2.5	
NP-VNGA160408TA4		★			4	9.525	4.76	0.8	3.81	2.0	
NP-VNGA160404TS4	★				4	9.525	4.76	0.4	3.81	2.5	
NP-VNGA160408TS4	★				4	9.525	4.76	0.8	3.81	2.0	
NP-VNGA160404TH4		★			4	9.525	4.76	0.4	3.81	2.5	
NP-VNGA160408TH4		★			4	9.525	4.76	0.8	3.81	2.0	
NP-VNGA160402GA2		●			2	9.525	4.76	0.2	3.81	2.5	
NP-VNGA160404GA2		●		●	2	9.525	4.76	0.4	3.81	2.5	
NP-VNGA160408GA2		●		●	2	9.525	4.76	0.8	3.81	2.0	
NP-VNGA160412GA2		★		★	2	9.525	4.76	1.2	3.81	1.5	
NP-VNGA160402GS2	★				2	9.525	4.76	0.2	3.81	2.5	
NP-VNGA160404GS2	●				2	9.525	4.76	0.4	3.81	2.5	
NP-VNGA160408GS2	●				2	9.525	4.76	0.8	3.81	2.0	
NP-VNGA160412GS2	★				2	9.525	4.76	1.2	3.81	1.5	
NP-VNGA160404GH2		★			2	9.525	4.76	0.4	3.81	2.5	
NP-VNGA160408GH2		★			2	9.525	4.76	0.8	3.81	2.0	
NP-VNGA160402FS2	★		●		2	9.525	4.76	0.2	3.81	2.5	
NP-VNGA160404FS2	★		●		2	9.525	4.76	0.4	3.81	2.5	
NP-VNGA160408FS2	★		●		2	9.525	4.76	0.8	3.81	2.0	
NP-VNGA160404VA2		●			2	9.525	4.76	0.4	3.81	2.5	
NP-VNGA160408VA2		●			2	9.525	4.76	0.8	3.81	2.0	
NP-VNGA160412VA2		★			2	9.525	4.76	1.2	3.81	1.5	
NP-VNGA160404TA2		●			2	9.525	4.76	0.4	3.81	2.5	
NP-VNGA160408TA2		●			2	9.525	4.76	0.8	3.81	2.0	
NP-VNGA160404TS2	★				2	9.525	4.76	0.4	3.81	2.5	
NP-VNGA160408TS2	★				2	9.525	4.76	0.8	3.81	2.0	
NP-VNGA160404TH2		★			2	9.525	4.76	0.4	3.81	2.5	
NP-VNGA160408TH2		★			2	9.525	4.76	0.8	3.81	2.0	
NEW BL-VNGM160404TN2		●			2	9.525	4.76	0.4	3.81	2.5	
NEW BL-VNGM160408TN2		●			2	9.525	4.76	0.8	3.81	2.0	

1/1



● / ★ = Expansion

● : Inventory maintained. ★ : Inventory maintained in Japan.

CCGW 7°, CCGT 7°, CPGB 11°


POSITIVE INSERTS (WITH HOLE)

Order number	BC8210	BC8220	NEW MB8210	NEW MB8220	ZEFF	IC	S	RE	D1	LE	Geometry
NP-CCGW060202GA2		●			2	6.35	2.38	0.2	2.8	1.7	
NP-CCGW060204GA2		●		●	2	6.35	2.38	0.4	2.8	1.8	
NP-CCGW060208GA2		●		●	2	6.35	2.38	0.8	2.8	2.0	
NP-CCGW09T302GA2		●			2	9.525	3.97	0.2	4.4	1.7	
NP-CCGW09T304GA2	●	●		●	2	9.525	3.97	0.4	4.4	1.8	
NP-CCGW09T308GA2	●	●		●	2	9.525	3.97	0.8	4.4	2.0	
NP-CCGW060202GS2	★				2	6.35	2.38	0.2	2.8	1.7	
NP-CCGW060204GS2	●				2	6.35	2.38	0.4	2.8	1.8	
NP-CCGW060208GS2	●				2	6.35	2.38	0.8	2.8	2.0	
NP-CCGW09T302GS2	★				2	9.525	3.97	0.2	4.4	1.7	
NP-CCGW09T304GS2	●	●			2	9.525	3.97	0.4	4.4	1.8	
NP-CCGW09T308GS2	●	●			2	9.525	3.97	0.8	4.4	2.0	
NP-CCGW060202FS2	●		●		2	6.35	2.38	0.2	2.8	1.7	
NP-CCGW060204FS2	●		●		2	6.35	2.38	0.4	2.8	1.8	
NP-CCGW060208FS2	●		●		2	6.35	2.38	0.8	2.8	2.0	
NP-CCGW09T302FS2	●		●		2	9.525	3.97	0.2	4.4	1.7	
NP-CCGW09T304FS2	●	●	●		2	9.525	3.97	0.4	4.4	1.8	
NP-CCGW09T308FS2	●	●	●		2	9.525	3.97	0.8	4.4	2.0	
NP-CCGW09T304VA2		●			2	9.525	3.97	0.4	4.4	1.8	
NP-CCGW09T308VA2		●			2	9.525	3.97	0.8	4.4	2.0	
NP-CCGW09T304TA2	●	●			2	9.525	3.97	0.4	4.4	1.8	
NP-CCGW09T308TA2	●	●			2	9.525	3.97	0.8	4.4	2.0	
NP-CCGW09T304FSWS2	●		●		2	9.525	3.97	0.4	4.4	1.8	
NP-CCGW09T308FSWS2	●		●		2	9.525	3.97	0.8	4.4	2.0	
NP-CCGW09T304GWS2		●		●	2	9.525	3.97	0.4	4.4	1.8	
NP-CCGW09T308GWS2		●		●	2	9.525	3.97	0.8	4.4	2.0	
NP-CCGW09T304GSWS2	●				2	9.525	3.97	0.4	4.4	1.8	
NP-CCGW09T308GSWS2	●				2	9.525	3.97	0.8	4.4	2.0	
BF-CCGT09T304TS2	●				2	9.525	3.97	0.4	4.4	1.8	
BF-CCGT09T308TS2	●				2	9.525	3.97	0.8	4.4	2.0	
NEW BL-CCGT09T304TN2		●			2	9.525	3.97	0.4	4.4	1.8	
NEW BL-CCGT09T308TN2		●			2	9.525	3.97	0.8	4.4	2.0	
BM-CCGT09T304TA2		●			2	9.525	3.97	0.4	4.4	1.8	
BM-CCGT09T308TA2		●			2	9.525	3.97	0.8	4.4	2.0	
NP-CCGW03S102FS	●		●		1	3.57*	1.39	0.2	2.0	1.1	
NP-CCGW03S104FS	●		●		1	3.57*	1.39	0.4	2.0	1.0	
NP-CCGW04T002FS	●		●		1	4.37*	1.79	0.2	2.4	1.5	
NP-CCGW04T004FS	●		●		1	4.37*	1.79	0.4	2.4	1.4	



1/2

CCGW 7°, CCGT 7°, CPGB 11° – POSITIVE INSERTS (WITH HOLE)


Order number	BC8210	BC8220	NEW MB8210	NEW MB8220	ZEFF	IC	S	RE	D1	LE	Geometry
NP-CPGB080204GA2		●			2	7.94	2.38	0.4	3.5	1.8	
NP-CPGB080208GA2		●			2	7.94	2.38	0.8	3.5	2.0	
NP-CPGB080212GA2		★			2	7.94	2.38	1.2	3.5	2.2	
NP-CPGB090302GA2		★			2	9.525	3.18	0.2	4.5	1.7	
NP-CPGB090304GA2		●			2	9.525	3.18	0.4	4.5	1.8	
NP-CPGB090308GA2		●			2	9.525	3.18	0.8	4.5	2.0	
NP-CPGB090312GA2		★			2	9.525	3.18	1.2	4.5	2.2	
NP-CPGB080204GS2	★				2	7.94	2.38	0.4	3.5	1.8	
NP-CPGB080208GS2	★				2	7.94	2.38	0.8	3.5	2.0	
NP-CPGB090302GS2	★				2	9.525	3.18	0.2	4.5	1.7	
NP-CPGB090304GS2	★				2	9.525	3.18	0.4	4.5	1.8	
NP-CPGB090308GS2	★				2	9.525	3.18	0.8	4.5	2.0	
NP-CPGB090304VA2		●			2	9.525	3.18	0.4	4.5	1.8	
NP-CPGB090308VA2		●			2	9.525	3.18	0.8	4.5	2.0	
NP-CPGB090312VA2		★			2	9.525	3.18	1.2	4.5	2.2	
NP-CPGB090304TA2		★			2	9.525	3.18	0.4	4.5	1.8	
NP-CPGB090308TA2		★			2	9.525	3.18	0.8	4.5	2.0	
NP-CPGB090312TA2		★			2	9.525	3.18	1.2	4.5	2.2	

2/2

DCGW 7°, DCGT 7°

POSITIVE INSERTS (WITH HOLE)


Order number	BC8210	BC8220	NEW MB8210	NEW MB8220	ZEFF	IC	S	RE	D1	LE	Geometry
NP-DCGW070202GA2	●	●			2	6.35	2.38	0.2	2.8	2.2	
NP-DCGW070204GA2	●	●		●	2	6.35	2.38	0.4	2.8	2.1	
NP-DCGW070208GA2	★				2	6.35	2.38	0.8	2.8	2.0	
NP-DCGW11T302GA2	●	●			2	9.525	3.97	0.2	4.4	2.2	
NP-DCGW11T304GA2	●	●		●	2	9.525	3.97	0.4	4.4	2.1	
NP-DCGW11T308GA2	●	●		●	2	9.525	3.97	0.8	4.4	2.0	
NP-DCGW070202GS2	●				2	6.35	2.38	0.2	2.8	2.2	
NP-DCGW070204GS2	●				2	6.35	2.38	0.4	2.8	2.1	
NP-DCGW070208GS2	●				2	6.35	2.38	0.8	2.8	2.0	
NP-DCGW11T302GS2	●				2	9.525	3.97	0.2	4.4	2.2	
NP-DCGW11T304GS2	●	●			2	9.525	3.97	0.4	4.4	2.1	
NP-DCGW11T308GS2	●	●			2	9.525	3.97	0.8	4.4	2.0	
NP-DCGW070202FS2	●		●		2	6.35	2.38	0.2	2.8	2.2	
NP-DCGW070204FS2	●		●		2	6.35	2.38	0.4	2.8	2.1	
NP-DCGW070208FS2	★		●		2	6.35	2.38	0.8	2.8	2.0	
NP-DCGW11T302FS2	●		●		2	9.525	3.97	0.2	4.4	2.2	
NP-DCGW11T304FS2	●	●	●		2	9.525	3.97	0.4	4.4	2.1	
NP-DCGW11T308FS2	●	●	●		2	9.525	3.97	0.8	4.4	2.0	
NP-DCGW11T304VA2		●			2	9.525	3.97	0.4	4.4	2.1	
NP-DCGW11T308VA2		●			2	9.525	3.97	0.8	4.4	2.0	
NP-DCGW11T304TA2	●	★			2	9.525	3.97	0.4	4.4	2.1	
NP-DCGW11T308TA2	●	★			2	9.525	3.97	0.8	4.4	2.0	
BF-DCGT11T304TS2	●				2	9.525	3.97	0.4	4.4	2.1	
BF-DCGT11T308TS2	●				2	9.525	3.97	0.8	4.4	2.0	
NEW BL-DCGT11T304TN2		●			2	9.525	3.97	0.4	4.4	2.1	
NEW BL-DCGT11T308TN2		●			2	9.525	3.97	0.8	4.4	2.0	
BM-DCGT11T304TA2		●			2	9.525	3.97	0.4	4.4	2.1	
BM-DCGT11T308TA2		●			2	9.525	3.97	0.8	4.4	2.0	



1/1

TPGB 11°

POSITIVE INSERTS (WITH HOLE)

Order number	BC8210	BC8220	NEW MB8210	NEW MB8220	ZEFF	IC	S	RE	D1	LE	Geometry
NP-TPGB090204GA3	★	★		●	3	5.56	2.38	0.4	2.9	1.6	
NP-TPGB090208GA3	★	★		★	3	5.56	2.38	0.8	2.9	1.7	
NP-TPGB110302GA3	★	★			3	6.35	3.18	0.2	3.4	1.5	
NP-TPGB110304GA3	●			●	3	6.35	3.18	0.4	3.4	1.6	
NP-TPGB110308GA3	●			★	3	6.35	3.18	0.8	3.4	1.7	
NP-TPGB160304GA3	●			★	3	9.525	3.18	0.4	4.4	1.6	
NP-TPGB160308GA3	●			★	3	9.525	3.18	0.8	4.4	1.7	
NP-TPGB080204GS3	★				3	4.76	2.38	0.4	2.4	1.6	
NP-TPGB080208GS3	★				3	4.76	2.38	0.8	2.4	1.7	
NP-TPGB090204GS3	★				3	5.56	2.38	0.4	2.9	1.6	
NP-TPGB090208GS3	★				3	5.56	2.38	0.8	2.9	1.7	
NP-TPGB110302GS3	★				3	6.35	3.18	0.2	3.4	1.5	
NP-TPGB110304GS3	★				3	6.35	3.18	0.4	3.4	1.6	
NP-TPGB110308GS3	★				3	6.35	3.18	0.8	3.4	1.7	
NP-TPGB160304GS3	★				3	9.525	3.18	0.4	4.4	1.6	
NP-TPGB160308GS3	★				3	9.525	3.18	0.8	4.4	1.7	
NP-TPGB110302FS3	★		★		3	6.35	3.18	0.2	3.4	1.5	
NP-TPGB110304FS3	★		●		3	6.35	3.18	0.4	3.4	1.6	
NP-TPGB110308FS3	★		●		3	6.35	3.18	0.8	3.4	1.7	
NP-TPGB110304VA3		●			3	6.35	3.18	0.4	3.4	1.6	
NP-TPGB110308VA3		●			3	6.35	3.18	0.8	3.4	1.7	
NP-TPGB110304TA3		★			3	6.35	3.18	0.4	3.4	1.6	
NP-TPGB110308TA3		★			3	6.35	3.18	0.8	3.4	1.7	

1/1





● / ★ = Expansion

● : Inventory maintained. ★ : Inventory maintained in Japan.

VBGW 5°, VBGT 5°, VCGW 7°

POSITIVE INSERTS (WITH HOLE)

Order number	BC8210	BC8220	NEW MB8210	NEW MB8220	ZEFF	IC	S	RE	D1	LE	Geometry
NP-VBGW110302GA2		●			2	6.35	3.18	0.2	2.85	2.5	
NP-VBGW110304GA2		●		★	2	6.35	3.18	0.4	2.85	2.5	
NP-VBGW110308GA2		★		★	2	6.35	3.18	0.8	2.85	2.0	
NP-VBGW160402GA2		★			2	9.525	4.76	0.2	4.43	2.5	
NP-VBGW160404GA2		●		●	2	9.525	4.76	0.4	4.43	2.5	
NP-VBGW160408GA2		●		●	2	9.525	4.76	0.8	4.43	2.0	
NP-VBGW110302GS2	★				2	6.35	3.18	0.2	2.85	2.5	
NP-VBGW110304GS2	★				2	6.35	3.18	0.4	2.85	2.5	
NP-VBGW110308GS2	★				2	6.35	3.18	0.8	2.85	2.0	
NP-VBGW160402GS2	●				2	9.525	4.76	0.2	4.43	2.5	
NP-VBGW160404GS2	●				2	9.525	4.76	0.4	4.43	2.5	
NP-VBGW160408GS2	●				2	9.525	4.76	0.8	4.43	2.0	
NP-VBGW110302FS2	●		●		2	6.35	3.18	0.2	2.85	2.5	
NP-VBGW110304FS2	★		●		2	6.35	3.18	0.4	2.85	2.5	
NP-VBGW110308FS2	★		●		2	6.35	3.18	0.8	2.85	2.0	
NP-VBGW160402FS2	★		●		2	9.525	4.76	0.2	4.43	2.5	
NP-VBGW160404FS2			●		2	9.525	4.76	0.4	4.43	2.5	
NP-VBGW160408FS2			●		2	9.525	4.76	0.8	4.43	2.0	
NP-VBGW160404VA2		●			2	9.525	4.76	0.4	4.43	2.5	
NP-VBGW160408VA2		●			2	9.525	4.76	0.8	4.43	2.0	
NP-VBGW160404TA2		●			2	9.525	4.76	0.4	4.43	2.5	
NP-VBGW160408TA2		★			2	9.525	4.76	0.8	4.43	2.0	
NEW BL-VBGT110304TN2		●			2	6.35	3.18	0.4	2.85	2.5	
NEW BL-VBGT110304TN2		●			2	6.35	3.18	0.8	2.85	2.0	
NEW BL-VBGT160404TN2		●			2	9.525	4.76	0.4	4.43	2.5	
NEW BL-VBGT160408TN2		●			2	9.525	4.76	0.8	4.43	2.0	
NP-VCGW160404GA2		●			2	9.525	4.76	0.4	4.4	2.5	
NP-VCGW160408GA2		●			2	9.525	4.76	0.8	4.4	2.0	
NP-VCGW160404GS2	●				2	9.525	4.76	0.4	4.4	2.5	
NP-VCGW160408GS2	●				2	9.525	4.76	0.8	4.4	2.0	
NP-VCGW160404VA2		●			2	9.525	4.76	0.4	4.4	2.5	
NP-VCGW160408VA2		●			2	9.525	4.76	0.8	4.4	2.0	
NP-VCGW160404TA2		★			2	9.525	4.76	0.4	4.4	2.5	
NP-VCGW160408TA2		★			2	9.525	4.76	0.8	4.4	2.0	


1/1

BC8200 / MB8200 SERIES

RECOMMENDED CUTTING CONDITIONS

Material	Grade	Cutting mode	Vc	f	ap	Coolant
H Hardened steels	BC8210	Continuous cutting	150 – 250 (90 – 300)	≤0.2	≤0.35	Dry, wet
		Light interrupted cutting	100 – 180 (50 – 200)	≤0.2	≤0.35	
	BC8220	Continuous cutting	150 – 200 (80 – 250)	≤0.2	≤0.5	
		Light to medium interrupted cutting	100 – 180 (50 – 200)	≤0.2	≤0.3	

1/1

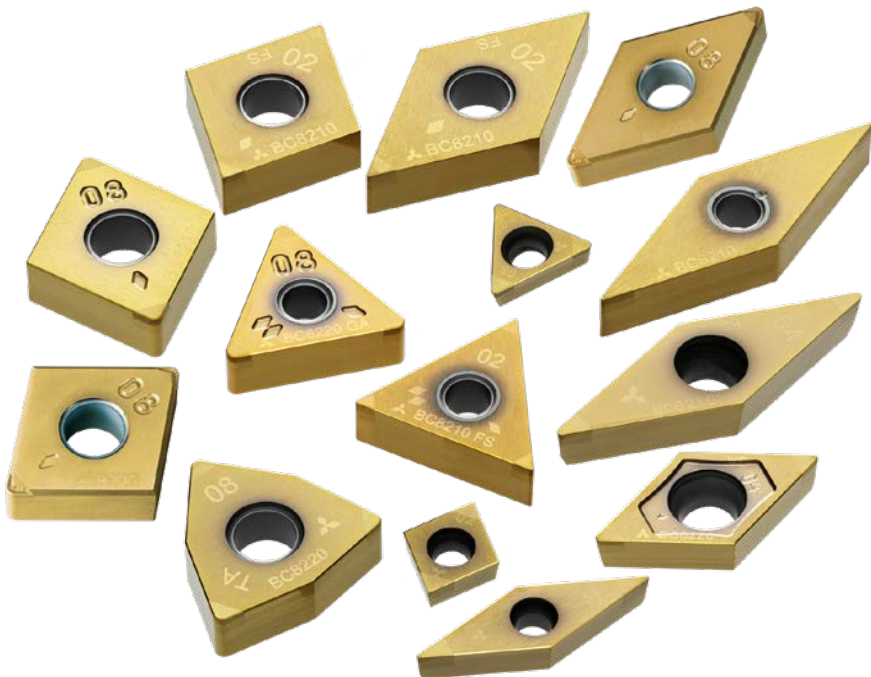


MB8200 SERIES

CUTTING PERFORMANCE

COMPARISON OF CONTINUOUS CUTTING : SCR420 (60HRC)

MB8210 achieves stable machining during continuous cutting.


Material	20Cr4 (60HRC)
Insert	CNGA120408
Vc (m/min)	180
f (mm/rev)	0.15
ap (mm)	0.2
Cutting mode	Dry cutting

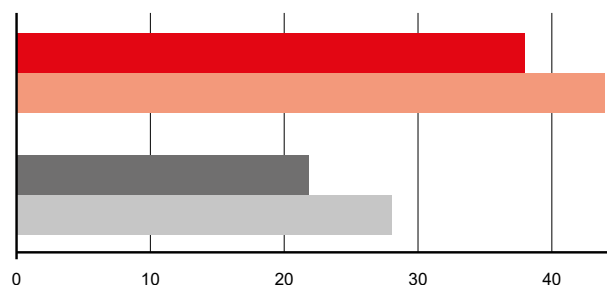

COMPARISON OF LIGHT INTERRUPTED CUTTING : SCR420 (60HRC)

MB8220 achieves stable cutting and is ideal for light interrupted cutting.

Material	20Cr4 (60HRC)
Insert	CNGA120408
Vc (m/min)	130
f (mm/rev)	0.15
ap (mm)	0.2
Cutting mode	Dry cutting

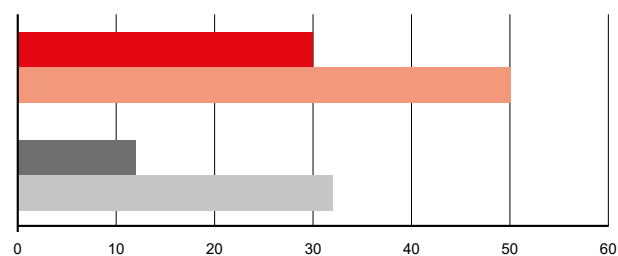

RECOMMENDED CUTTING CONDITIONS

Material	Grade	Cutting mode	Vc	f	ap	Coolant
H Hardened steels (Heat treated steels)	MB8210	External continuous cutting	100 ~ 250	-0.20	-0.30	Dry, wet
	MB8220	External interrupted cutting	100 ~ 150	-0.20	-0.50	



BC8200 SERIES

APPLICATION EXAMPLES

Insert	NP-CNGA120412GSWS2 BC8210
Material	Non-micro alloyed Steel
Cutting mode	External continuous cutting
Vc (m/min)	260
f (mm/rev)	0.20
ap (mm)	0.15
Cutting mode	Dry cutting

Result



During continuous cutting, it was possible to maintain a good surface roughness and achieve a tool life of 1.6 x or more when compared to conventional products.

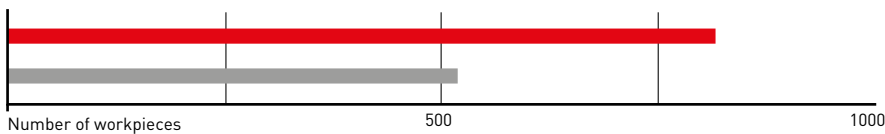

Insert	NP-DCGW11T304GS2 BC8210
Material	DIN 16MnCr5
Cutting mode	Internal continuous cutting
Vc (m/min)	240
f (mm/rev)	0.08
ap (mm)	0.20
Cutting mode	Dry cutting

Result



The same tool life as continuous cutting was achieved. Good surface roughness compared to conventional products was also maintained.

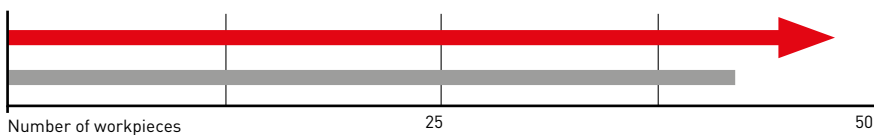

Insert	NP-CCGW09T308GS2 BC8210
Material	DIN 16MnCr5
Component	Automobile parts
Cutting mode	Internal continuous cutting
Vc (m/min)	140
f (mm/rev)	0.07
ap (mm)	0.10
Cutting mode	Dry cutting

Result


By significantly suppressing the deterioration of the surface of the insert, tool life was extended during continuous cutting to 1.8 x longer than that of conventional products.

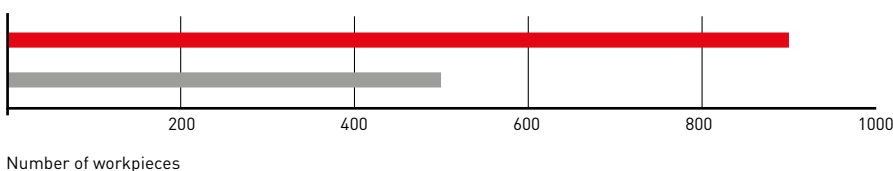

BC8200 SERIES

APPLICATION EXAMPLES

Insert	NP-DNGA110416GA2 BC8220
Material	DIN Cf53 (58HRC)
Component	Automobile parts
Cutting mode	External continuous cutting
Vc (m/min)	140
f (mm/rev)	0.15
ap (mm)	0.15
Cutting mode	Dry cutting




Result

Tool life for continuous cutting is 1.2 x longer than that of conventional products.




Number of workpieces

Insert	NP-TNGA160420TA3 BC8220
Material	DIN 16MnCr5
Cutting mode	Heavy interrupted boring
Vc (m/min)	130
f (mm/rev)	0.12
ap (mm)	0.25
Cutting mode	Dry cutting



Result

BC8220 has excellent fracture resistance and a tool life 1.25 x longer than conventional products.

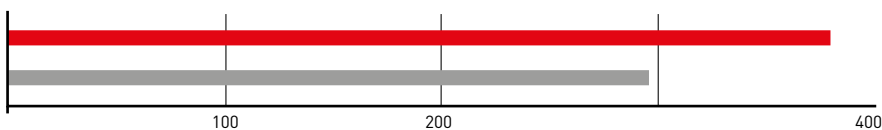


Number of workpieces

BC8200 SERIES

APPLICATION EXAMPLES

Insert	BR-CNGM120408TA2 BC8220
Material	Steel (62-64HRC)
Component	Gear
Cutting mode	External continuous cutting
Vc (m/min)	150 – 170
f (mm/rev)	0.1 – 0.2
ap (mm)	0.7
Cutting mode	Dry cutting




Result

While conventional products can machine up to 300 pieces, BC8220 can machine up to 450 pieces.




Number of workpieces

Insert	BR-DNGM150408TA2 BC8220
Material	SMnC420 (59-63HRC)
Component	Gear
Cutting mode	External continuous interrupted turning
Vc (m/min)	180
f (mm/rev)	0.03 – 0.13
ap (mm)	1.0 – 1.1
Cutting mode	Dry cutting



Result

The BR breaker removed the required material in one pass compared to a conventional product that took 4 passes. This gave the BR breaker a tool life 1.5 x greater than the conventional product.

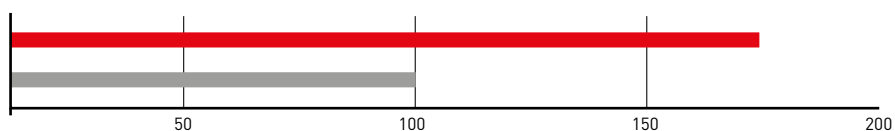

Number of workpieces

SYMBOLS

 Recommended cutting conditions	MACHINING TYPE
NEW Completely new products or expansions released in the current Spring or Autumn product launch and are not included in the latest version of the General Catalogue.	 Roughing
NEW Products or expansions that have already been introduced in one of the previous Spring or Autumn product launches but are not included in the latest General Catalogue.	 Medium cutting
APPLICATION	 Light cutting
 Face milling	 Pre-finishing
 Chamfer milling	 Finishing
 Shoulder milling with R	 Fine-finishing
 Face milling close to a wall	TOOL MATERIAL
 Shoulder milling	 Ultra micro grain carbide Ultra micro grain carbide substrate material.
 Side milling	 Cubic boron nitride Mitsubishi Materials' original CBN material.
 Slot milling	 Ceramic For high speed efficient machining of super alloys due to the excellent high temperature strength property.
 Ramping	 High hardness powder metallurgy HSS High hardness powder metallurgy HSS substrate material.
 Pocket milling	 High grade high alloy HSS High grade high alloy HSS substrate material.
 Slot milling with R	 Cobalt high speed steel Cobalt high speed steel substrate material.
 Copy milling	 High speed steel High speed steel substrate material.
 T-Slot milling	

SYMBOLS

COATING



SMART MIRACLE coating

New smooth and dense coating technology for high efficiency milling of difficult to cut materials.



CRN coating

Newly developed CrN coating for Copper Electrodes machining.



Violet coating

Increased tool life of 2-3 times more than TiN coated products.



DP coating

New generation coating suitable for a wide range of materials.



MIRACLE coating

The original Miracle (Al,Ti)N coating. Also suitable for dry cutting.



[Al, Ti]N coating

[Al,Ti]N highly versatile application range.



[Al,Ti,Cr]N multi-layer coating

For carbon, alloy and hardened steels.



IMPACT MIRACLE coating

Single phase nano crystal coating technology has higher film hardness and heat resistance.



MIRACLE coating

The original MIRACLE (Al,Ti)N coating. Also suitable for dry cutting.



VFR coating

The [AlCrSi]N/[AlTiSi]N PVD multilayer coating is ideal for machining of extremely hard materials up to 70 HRC.



DLC coating

Hardness similar to CVD diamond coating achieved with high adhesion strength.



Diamond coating

Suitable for CFRP and CFRP-aluminium materials.



Diamond coating

Suitable for graphite machining.



Diamond coating

The original CVD diamond coating.



CVD Diamond coating

Unique multi-layer micro-grain diamond crystal control technology drastically improves wear resistance and smoothness.

CUTTING EDGE PROPERTIES



Sharp corner edge

Indicates the end mill has a sharp corner edge.



Gash land

Indicates the end mill cutting edge has a protective chamfer.



Rake angle



Helix angle

Indicates the helix angle of the end mill.



Point angle

Indicates the drill point angle.



Roughing flute geometry



Variable helix



Rounded gash



Corner angle

WEB THINNING



X type point geometry

X web thinning used at the drill point.



XR type point geometry

XR web thinning used at the drill point.



S type point geometry

Easy cutting geometry.



N type point geometry

Effective when the point web is thick.



Chipbreaker

SYMBOLS

TOLERANCES



Tolerance of taper angle
Indicates the tolerance of the taper angle.



R tolerance
Indicates the radial tolerance of a ball nose end mill.



R tolerance
Indicates the radial tolerance of the corner radius.



R tolerance
Indicates the radial tolerance of a cutter with a corner radius.



Outside diameter tolerance
Indicates the diameter tolerance of the end mill.



Peak tolerance
Indicates the tolerance for the end diameter.



Shank diameter tolerance



Shank diameter tolerance



Drill tolerance / diameter

COOLANT HOLES



External coolant



Internal coolant



Internal coolant



Centered, internal coolant hole



Radial, internal coolant holes



Internal coolant holes



Internal coolant holes

MEMO

EUROPEAN SALES COMPANIES

GERMANY

MITSUBISHI MATERIALS TOOLS EUROPE GMBH
Comeniusstr. 2 . 40670 Meerbusch
Phone +49 2159 91890 . Fax +49 2159 918966
Email admin@mmchg.de

UK Office

MMC HARDMETAL UK LTD
1 Centurion Court, Centurion Way
Tamworth, B77 5PN
Phone +44 1827 312312
Email sales@mitsubishicarbide.co.uk

UK Deliveries / Returns

Unit 4 B5K Business Park, Quartz Close
Tamworth, B77 4GR

SPAIN

MITSUBISHI MATERIALS ESPAÑA, S.A.
Calle Emperador 2 . 46136 Museros / Valencia
Phone +34 96 1441711
Email comercial@mmevalencia.es

FRANCE

MMC METAL FRANCE S.A.R.L.
6, Rue Jacques Monod . 91400 Orsay
Phone +33 1 69 35 53 53 . Fax +33 1 69 35 53 50
Email mmfsales@mmc-metal-france.fr

POLAND

MMC HARDMETAL POLAND SP. Z O.O.
Al. Armii Krajowej 61 . 50-541 Wrocław
Phone +48 71335 1620 . Fax +48 71335 1621
Email sales@mitsubishicarbide.com.pl

ITALY

MMC ITALIA S.R.L.
Viale Certosa 144 . 20156 Milano
Phone +39 0293 77031 . Fax +39 0293 589093
Email info@mmc-italia.it

TURKEY

MITSUBISHI MATERIALS TOOLS EUROPE GMBH ALMANYA İZMİR MERKEZ ŞUBESİ
Adalet Mahallesi Anadolu Caddesi No: 41-1 . 15001 35530 Bayraklı / İzmir
Phone +90 232 5015000 . Fax +90 232 5015007
Email info@mmchg.com.tr

www.mmc-carbide.com

DISTRIBUTED BY:

┌

┐

└

┘