


NEW

2025.10

B277E

MC/MP7100 SERIES

DEDICATED CARBIDE SUBSTRATE
NEW COATING TECHNOLOGY FOR STAINLESS STEEL
TURNING

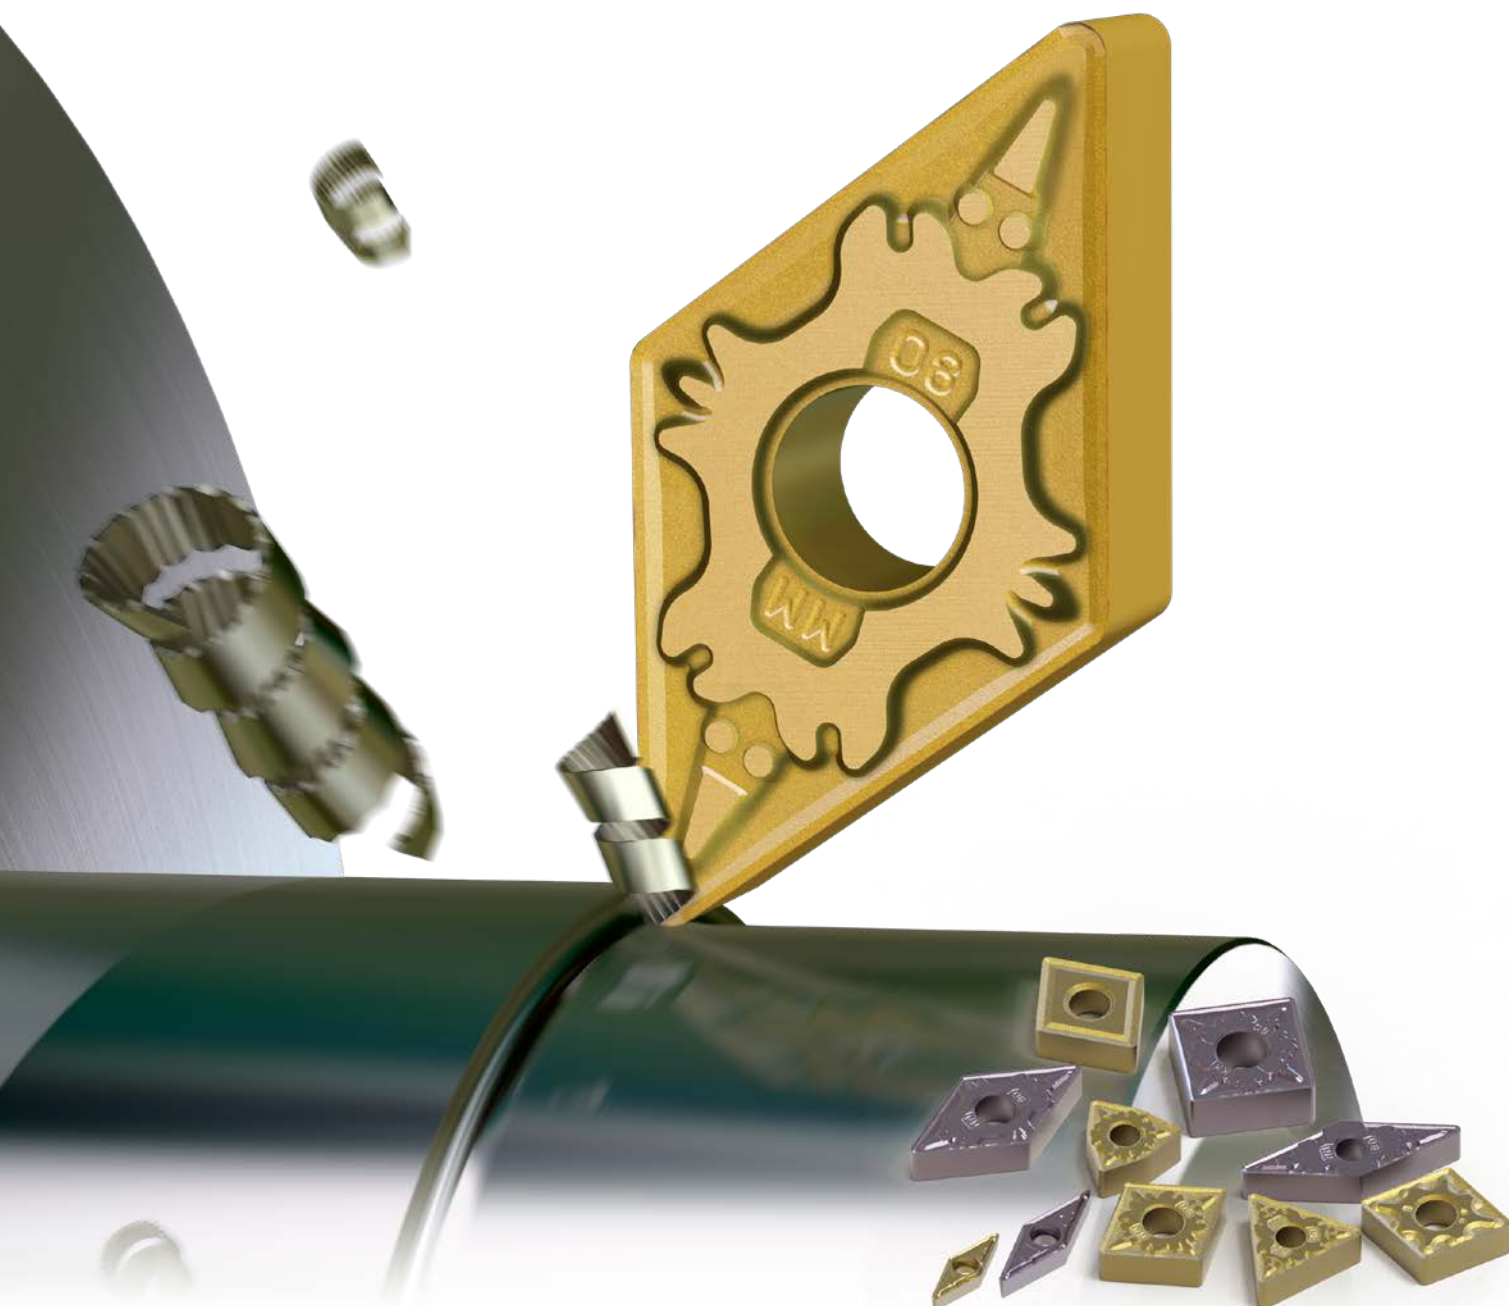

 **MITSUBISHI MATERIALS**

MC/MP7100 SERIES

CREATION OF A NEW SERIES FOR A VARIETY OF STAINLESS STEEL APPLICATIONS

MC7125



THE ALL ROUND CHOICE FOR STAINLESS STEEL TURNING

First recommended grade.
Compatible with a wide range of applications,
from continuous cutting through to
interrupted cutting.
Suitable for a wide variety of stainless steels.


MC7115



FOR HIGH SPEED TURNING

CVD coated carbide grade specialised
for high speed cutting.
For medium to large austenitic stainless steel
parts, cutting speeds of 250 m/min or more reduce
machining time.

MP7135



TOUGHER FOR INTERRUPTED CUTTING

PVD coated carbide grade that is resistant to the
impacts of interrupted cutting.
It is ideal for intermittent cutting of workpieces,
as well as for rough machining of forged and cast
stainless products.

MC/MP7100 SERIES MACHINING VIDEO




MC/MP7100 SERIES

MC7125

THE ALL-ROUNDER FOR STAINLESS STEEL TURNING

Incredibly stable with both plastic deformation and chipping resistance.

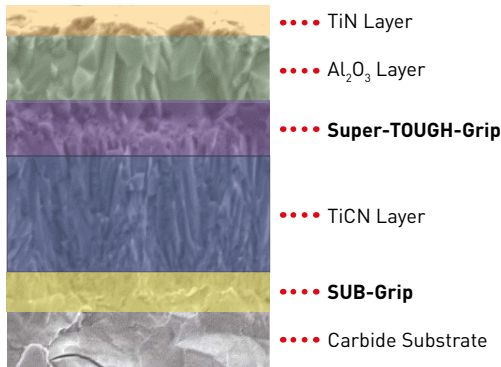

COATING LAYER WITH HIGH ADHESIVE STRENGTH

Tough and Super TOUGH-Grip dramatically improve adhesion strength and maximise the effectiveness of the coating.


SUBSTRATE RESISTANT TO PLASTIC DEFORMATION AND CHIPPING

By optimising the particle size distribution of the main component WC and improving its dispersibility, reduced contact between the WC particles, dramatically improves resistance to plastic deformation and fracture.

MC7115

FOR HIGH SPEED TURNING

Increases the hardness of the base material, providing excellent resistance to plastic deformation and crater wear.

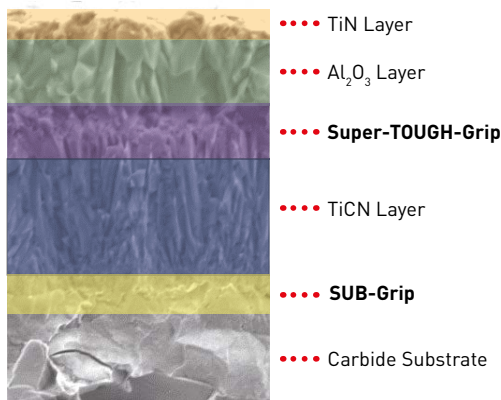

COATING LAYER WITH HIGH ADHESIVE STRENGTH

Tough and Super Tough Grip improve adhesion strength and maximise the effectiveness of the coating. "Super" Nano Texture Technology suppresses crater wear during high speed cutting.


CARBIDE SUBSTRATE THAT IS STRONG FOR HIGH SPEED CUTTING

The hard carbide substrate is resistant to the high temperatures generated during high speed cutting and has excellent resistance to plastic deformation and crater wear.

MP7135

TOUGHER FOR INTERRUPTED CUTTING

The highly heat resistant coating and dedicated carbide substrate provide both wear resistance and chipping resistance.

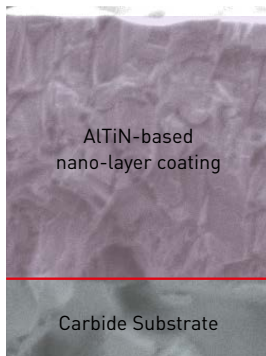

AlTiN-BASED NANO-LAYER COATING

By layering the highly heat resistant AlTiN coating at the Nano level, excellent wear and chipping resistance has been achieved.

TECHNOLOGY TO IMPROVE ADHESION STRENGTH

Suppresses peeling when machining stainless steel and exhibits excellent chipping resistance.

DEDICATED CARBIDE BASE MATERIAL

A carbide substrate exclusively for stainless steel that combines both wear and fracture resistance.


MC/MP7100 SERIES

COATED GRADE FOR STAINLESS STEEL TURNING

IMPROVED COATING ADHESION STRENGTH AND DEDICATED CARBIDE SUBSTRATE SUPPRESSES NOTCHING DURING STAINLESS STEEL TURNING

Stainless steels are widely used for components that require resistance to corrosion. When comparing stainless steels to other steels and cast irons, it has low hardness but is tough to machine and susceptible to work hardening. Due to these characteristics, turning inserts are prone to edge damage and weld chipping. Additionally, plastic deformation of the insert due to the heat generated makes more difficult to cut, resulting in unstable tool life. The properties of stainless steels, such as corrosion and heat resistance, vary greatly depending on the metallurgical structure and composition, and these small differences can make it appear as if a completely different workpiece material is being machined.

Mitsubishi Materials has the ability to combine coating and substrate technology to produce a series of grades to successfully machine stainless steels.



Notching



Fracture from welding chipping





Plastic deformation

FEATURES OF THE MC7100 SERIES COATING

“SUPER” NANO TEXTURE TECHNOLOGY

The standard Nano Texture Technology has been improved and developed to be an industry leading standard for crystal growth of Al_2O_3 coatings. This Super Nano Texture Technology increases tool life and wear resistance due to the process that creates fine, dense crystal growth.

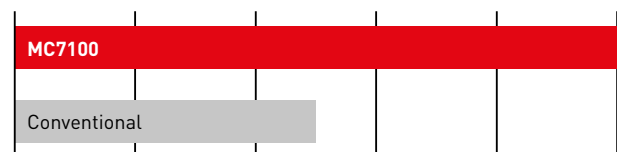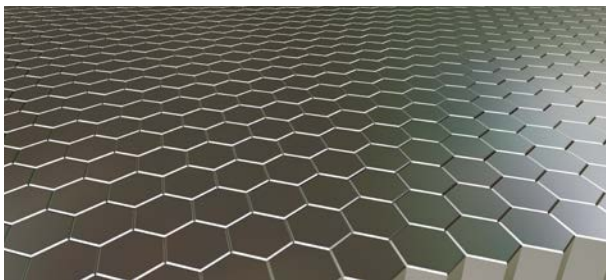

The ratio of Al_2O_3 crystal grains with the same orientation


CRYSTAL ORIENTATION

(Image)



Conventional CVD inserts

Grain size and growth direction are uneven.



Nano Texture

Uniformity of the grain size and growth direction has improved.




“Super” Nano Texture

Uniformity of the growth direction has drastically improved.

MC/MP7100 SERIES

TOUGH AND SUB GRIP LAYERS

THE EXTRA STRENGTH OF THE ADHESION BETWEEN THE COATING LAYERS SUPPRESSES PEELING DURING MACHINING OF STAINLESS STEELS

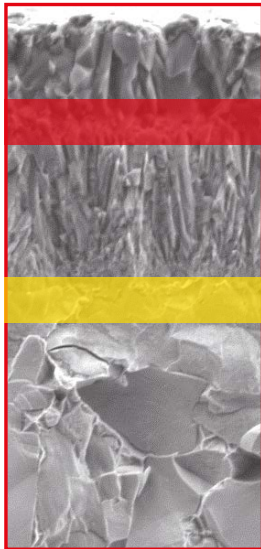

SUPER-TOUGH-GRIP

The adhesion strength of the Al_2O_3 layer, which was prone to peeling due to the work-hardened layer when machining stainless steel, has been significantly improved.

SUB-GRIP

It increases the adhesion strength between the carbide substrate and the coating layer, and prevents the coating from peeling off due to welding.

FEATURES OF THE CARBIDE SUBSTRATES

MC7115


Has crater wear and plastic deformation resistance that are ideal for high-speed cutting of stainless steel.

MP7135

The dedicated carbide substrate has excellent wear resistance and greatly improved chipping resistance.

MC7125



By optimising the particle size distribution, the boundary contact between the low toughness WC particles has been reduced and promotes hardness, thereby dramatically improving plastic deformation and fracture resistance.

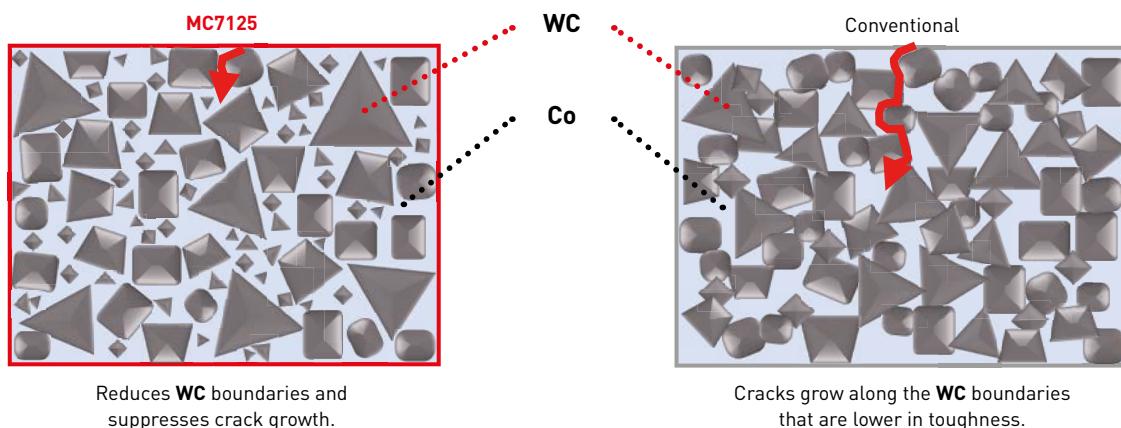

CHIPBREAKER SYSTEM

NEGATIVE INSERT FOR EXTERNAL TURNING

M

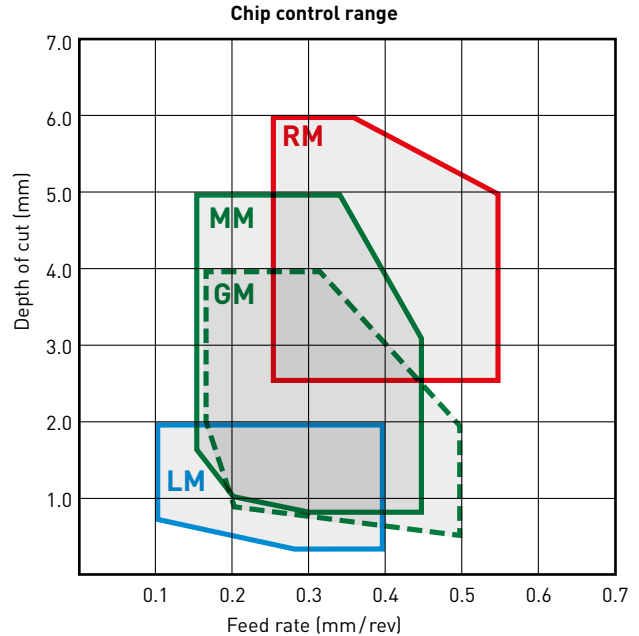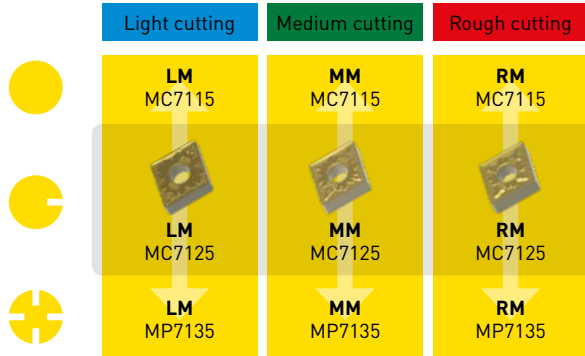


- Stable cutting**
 - Continuous cutting
 - Constant depth of cut
 - Pre-machined surfaces
 - Securely clamped component cutting
- General cutting**
- Unstable cutting**
 - Heavy interrupted cutting
 - Irregular depth of cut
 - Low clamping rigidity cutting

MAIN CHIPBREAKER

LM CHIPBREAKER FOR LIGHT CUTTING

Excellent burr control


Reduces the incidence of burrs drastically because the sharpness properties and cutting edge strength are optimised with different rake angles.



MM CHIPBREAKER FOR MEDIUM CUTTING

Excellent welding resistance


The sharp design of the corner radius and main cutting edge improves welding resistance and prevents problems.



RM CHIPBREAKER FOR ROUGH CUTTING

Excellent fracture resistance


By optimizing the land angle and honing geometry, high cutting edge stability is achieved during interrupted machining.



GM CHIPBREAKER

Interpolated chipbreaker


Sub chipbreaker of the main LM and MM chipbreaker. Excellent in notching resistance for light cutting to medium cutting.



MA CHIPBREAKER

Multi-Assist chipbreaker

Suitable for medium cutting range.



CHIPBREAKER SYSTEM

5°, 7°, 11° POSITIVE INSERT

M

	Finish cutting	Light cutting	Medium cutting
●	FM MC7125	LM MC7125	MM MC7125
◐	FM MC7125	LM MC7125	MM MC7125
⊕	FM MP7135	LM MP7135	MM MP7135



Stable cutting

- Continuous cutting
- Constant depth of cut
- Pre-machined surfaces
- Securely clamped component cutting




General cutting



Unstable cutting

- Heavy interrupted cutting
- Irregular depth of cut
- Low clamping rigidity cutting

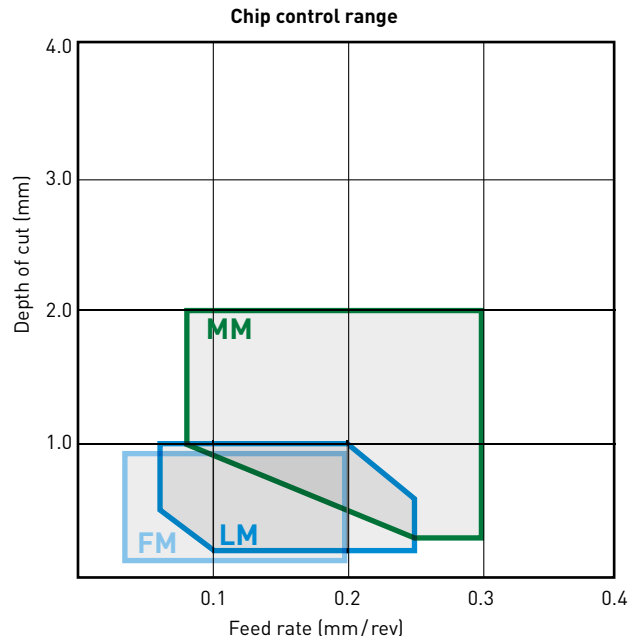


MAIN CHIPBREAKER

FM CHIPBREAKER FOR FINISH CUTTING

First recommendation for finishing stainless steel

Chipbreaker protrusion at the tip controls chips even at small depth of cut. Maintains edge strength and prevents sudden fractures.

5°, 7° Positive Insert

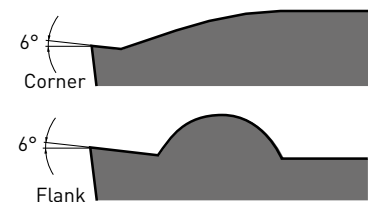


LM CHIPBREAKER FOR LIGHT CUTTING

First recommendation for light cutting of stainless steel

The large rake angle gives a sharp cutting edge that prevents chip welding, which in turn helps to control the surface finish.

The protruding chipbreaker provides an ideal range of chip control.

5°, 7°, 11° Positive Insert

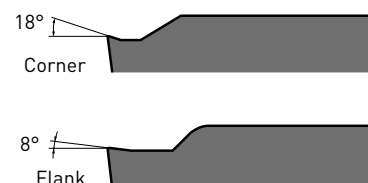


MM CHIPBREAKER FOR MEDIUM CUTTING

First recommendation for medium cutting of stainless steel

The flat land enables a good balance of wear and fracture resistance. The wide pocket reduces vibration and chip jamming and also prevents increases in cutting resistance even at large depths of cut.

5°, 7° Positive Insert

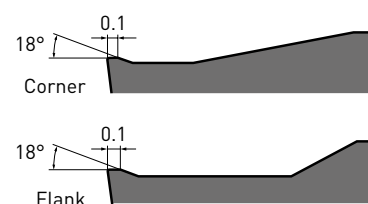

MC/MP7100 SERIES

CLASSIFICATION

M

Ferritic stainless steel

AISI430 / DIN 1.4016

Austenitic stainless steel

AISI304 / DIN 1.4301,
AISI316 / DIN 1.4401

Martensitic stainless steel

AISI420J2 / DIN 1.4028

Hardened stainless steel

AISI630 / DIN 1.4542

MC7125

First recommended


MM Chipbreaker



The new design has improved sharpness and welding resistance.

MA Chipbreaker


When cutting edge stability is required



A general-purpose chipbreaker with excellent stability and chip control.

GM Chipbreaker

When sharpness is required



It has a sharp cutting edge and produces chips that do not get tangled.

High-efficiency
High-speed

MC7115

MM Chipbreaker



LM Chipbreaker



The large rake angle helps to reduce burrs.

Wear Resistance
Continuous Machining

Fracture Resistance
Intermittent Machining

Duplex stainless steel

Duplex material,
DIN 1.4462

MP7135

First recommended

GM Chipbreaker



Combined with PVD coating, it provides excellent sharpness even during rough machining.

MM Chipbreaker

When cutting edge stability is required



RM Chipbreaker

For rough machining



The strong cutting edge geometry provides excellent breakage resistance during interrupted cutting.

For general stainless steels, MC7125 is the first recommendation.

For duplex stainless steels, MP7135 is the first recommendation.

Even with the same grade, it is possible to improve tool life by selecting the appropriate chipbreaker.

When using MC7125 and wear is stable, higher efficiency could be realised through higher speeds by using MC7115.

For greater fracture resistance choose MP7135.

When using MP7135 for continuous machining wear resistance and improved productivity can be realised by using MC7125.

MC/MP7100 SERIES

RECOMMENDED CUTTING CONDITIONS

EXTRACTS FROM RECOMMENDED CONDITIONS FOR NEGATIVE INSERTS

Material		Cutting conditions	Grade		Vc	f	ap
Austenitic stainless steel AISI304 / DIN 1.4301, AISI316 / DIN 1.4401, etc.	L	First recommended	MC7115	LM	185 – 295	0.10 – 0.35	0.3 – 2.0
		Fracture resistance	MC7125	LM	175 – 240	0.10 – 0.35	0.3 – 2.5
	M	First recommended	MC7125	MM	160 – 220	0.15 – 0.50	0.3 – 5.0
		Alternative	MC7125	GM, MA	160 – 220	0.15 – 0.50	0.3 – 5.0
		Wear resistance	MC7115	MM	170 – 270	0.15 – 0.45	0.7 – 5.0
		Fracture resistance	MP7135	GM, MM, MA	120 – 155	0.15 – 0.50	0.3 – 4.0
	R	First recommended	MP7135	RM	110 – 145	0.25 – 0.60	1.5 – 6.0
		Wear resistance	MC7125	RM	150 – 205	0.25 – 0.55	1.5 – 6.0
Ferritic and martensitic stainless steel AISI430 / DIN 1.4016, AISI420J2 / DIN 1.4028, etc.	L	First recommended	MC7115	LM	185 – 295	0.10 – 0.35	0.3 – 2.0
		Fracture resistance	MC7125	LM	175 – 240	0.10 – 0.50	0.3 – 2.5
	M	First recommended	MC7125	MM	160 – 220	0.15 – 0.50	0.3 – 5.0
		Alternative	MC7125	GM, MA	160 – 220	0.15 – 0.50	0.3 – 5.0
		Wear resistance	MC7115	MM	170 – 270	0.15 – 0.45	0.7 – 5.0
		Fracture resistance	MP7135	GM, MM, MA	120 – 155	0.15 – 0.50	0.3 – 4.0
	R	First recommended	MP7135	RM	110 – 145	0.25 – 0.60	1.5 – 6.0
		Wear resistance	MC7125	RM	150 – 205	0.25 – 0.55	1.5 – 6.0
Precipitation-hardening stainless steel AISI630 / DIN 1.4542, etc.	L	First recommended	MC7115	LM	110 – 165	0.10 – 0.35	0.3 – 2.0
		Fracture resistance	MC7125	LM	95 – 120	0.10 – 0.50	0.3 – 2.5
	M	First recommended	MC7125	MM	90 – 110	0.15 – 0.50	0.3 – 5.0
		Alternative	MC7125	GM, MA	90 – 110	0.15 – 0.50	0.3 – 5.0
		Wear resistance	MC7115	MM	100 – 150	0.15 – 0.45	0.7 – 5.0
		Fracture resistance	MP7135	GM, MM, MA	65 – 90	0.15 – 0.50	0.3 – 5.0
	R	First recommended	MP7135	RM	60 – 85	0.25 – 0.60	1.5 – 6.0
		Wear resistance	MC7125	RM	85 – 100	0.25 – 0.55	1.5 – 6.0
Duplex stainless steel, Duplex material, DIN 1.4462, etc.	L	First recommended	MP7135	LM	85 – 115	0.10 – 0.40	0.3 – 2.5
		Fracture resistance	MC7125	LM	115 – 160	0.10 – 0.40	0.3 – 2.5
	M	First recommended	MP7135	GM	80 – 105	0.15 – 0.50	0.3 – 5.0
		Alternative	MP7135	MM, MA	80 – 105	0.15 – 0.50	0.3 – 5.0
		Wear resistance	MC7125	GM, MM, MA	105 – 145	0.15 – 0.50	0.3 – 5.0
	R	First recommended	MP7135	RM	75 – 100	0.25 – 0.60	1.5 – 6.0

1/1



1. For recommended conditions other than those listed above, please refer to the information starting from page 23.

CNMG, CNMM

NEGATIVE INSERTS (WITH HOLE)

M Class

CNMG, CNMM

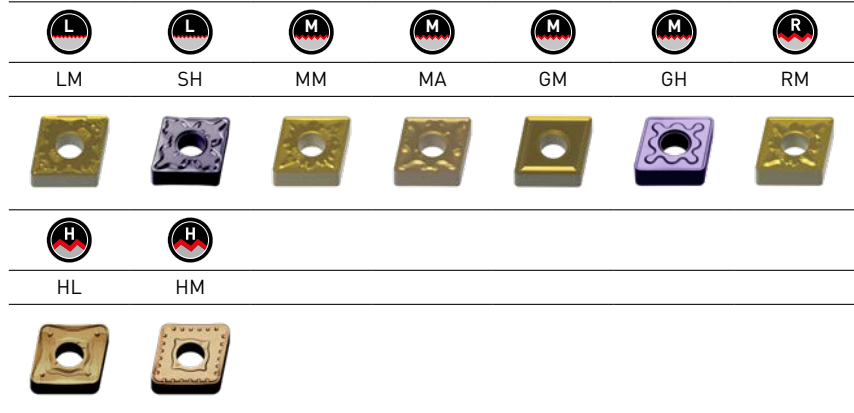

Order number		MC7115	MC7125	MP7135	IC	S	RE	D1
CNMG120404-LM	L	●	●	●	12.7	4.76	0.4	5.16
CNMG120408-LM	L	●	●	●	12.7	4.76	0.8	5.16
CNMG120412-LM	L	●	●	●	12.7	4.76	1.2	5.16
CNMG120404-SH	L			●	12.7	4.76	0.4	5.16
CNMG120408-SH	L			●	12.7	4.76	0.8	5.16
CNMG120408-MM	M	●	●	●	12.7	4.76	0.8	5.16
CNMG120412-MM	M	●	●	●	12.7	4.76	1.2	5.16
CNMG120416-MM	M	●	●	●	12.7	4.76	1.6	5.16
CNMG160608-MM	M	●	●	●	15.875	6.35	0.8	6.35
CNMG160612-MM	M	●	●	●	15.875	6.35	1.2	6.35
CNMG160616-MM	M	●	●	●	15.875	6.35	1.6	6.35
CNMG190608-MM	M	●	●	●	19.05	6.35	0.8	7.93
CNMG190612-MM	M	●	●	●	19.05	6.35	1.2	7.93
CNMG190616-MM	M	●	●	●	19.05	6.35	1.6	7.93
CNMG120404-MA	M		●	●	12.7	4.76	0.4	5.16
CNMG120408-MA	M		●	●	12.7	4.76	0.8	5.16
CNMG120412-MA	M		●	●	12.7	4.76	1.2	5.16
CNMG120416-MA	M		●	●	12.7	4.76	1.6	5.16
CNMG160608-MA	M			●	15.875	6.35	0.8	6.35
CNMG160612-MA	M			●	15.875	6.35	1.2	6.35
CNMG160616-MA	M			●	15.875	6.35	1.6	6.35
CNMG190612-MA	M			●	19.05	6.35	1.2	7.93
CNMG190616-MA	M		●	●	19.05	6.35	1.6	7.93
CNMG120404-GM	M		●	●	12.7	4.76	0.4	5.16
CNMG120408-GM	M		●	●	12.7	4.76	0.8	5.16
CNMG120412-GM	M		●	●	12.7	4.76	1.2	5.16
CNMG120408-GH	M			●	12.7	4.76	0.8	5.16
CNMG120412-GH	M			●	12.7	4.76	1.2	5.16
CNMG160612-GH	M			●	15.875	6.35	1.2	6.35
CNMG190612-GH	M			●	19.05	6.35	1.2	7.93
CNMG190616-GH	M			●	19.05	6.35	1.6	7.93

1/2

[10 inserts in one case]

CNMG, CNMM – NEGATIVE INSERTS (WITH HOLE)

Order number			MC7115	MC7125	MP7135	IC	S	RE	D1
CNMG120408-RM	R		●	●	●	12.7	4.76	0.8	5.16
CNMG120412-RM	R		●	●	●	12.7	4.76	1.2	5.16
CNMG120416-RM	R		●	●	●	12.7	4.76	1.6	5.16
CNMG160612-RM	R		●	●	●	15.875	6.35	1.2	6.35
CNMG160616-RM	R		●	●	●	15.875	6.35	1.6	6.35
CNMG190612-RM	R		●	●	●	19.05	6.35	1.2	7.93
CNMG190616-RM	R		●	●	●	19.05	6.35	1.6	7.93
CNMM190612-HL	H			●		19.05	6.35	1.2	7.93
CNMM190616-HL	H			●		19.05	6.35	1.6	7.93
CNMM190612-HM	H			●		19.05	6.35	1.2	7.93
CNMM190616-HM	H			●		19.05	6.35	1.6	7.93
									2/2

[10 inserts in one case]



23 

DNMG

NEGATIVE INSERTS (WITH HOLE)

M Class

DNMG

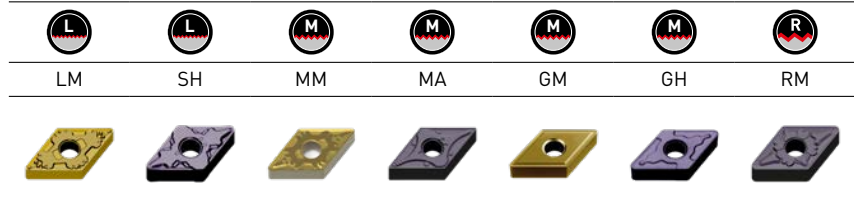

Order number		MC7115	MC7125	MP7135	IC	S	RE	D1
DNMG110404-LM	L	●	●	●	9.525	4.76	0.4	3.81
DNMG110408-LM	L	●	●	●	9.525	4.76	0.8	3.81
DNMG150404-LM	L	●	●	★	12.7	4.76	0.4	5.16
DNMG150408-LM	L	●	●	★	12.7	4.76	0.8	5.16
DNMG150412-LM	L	★	★	★	12.7	4.76	1.2	5.16
DNMG150604-LM	L	●	●	●	12.7	6.35	0.4	5.16
DNMG150608-LM	L	●	●	●	12.7	6.35	0.8	5.16
DNMG110404-SH	L			●	9.525	4.76	0.4	3.81
DNMG110408-SH	L			●	9.525	4.76	0.8	3.81
DNMG150404-SH	L			●	12.7	4.76	0.4	5.16
DNMG150408-SH	L			★	12.7	4.76	0.8	5.16
DNMG150408-MM	M	●	●	●	12.7	4.76	0.8	5.16
DNMG150412-MM	M		★	★	12.7	4.76	1.2	5.16
DNMG150608-MM	M	●	●	●	12.7	6.35	0.8	5.16
DNMG150612-MM	M	★	●	●	12.7	6.35	1.2	5.16
DNMG150404-MA	M		●	●	12.7	4.76	0.4	5.16
DNMG150408-MA	M		●	●	12.7	4.76	0.8	5.16
DNMG150412-MA	M		★	★	12.7	4.76	1.2	5.16
DNMG150604-MA	M		●	●	12.7	6.35	0.4	5.16
DNMG150608-MA	M		●	●	12.7	6.35	0.8	5.16
DNMG150612-MA	M		★	●	12.7	6.35	1.2	5.16
DNMG150404-GM	M		●	●	12.7	4.76	0.4	5.16
DNMG150408-GM	M		★	★	12.7	4.76	0.8	5.16
DNMG150604-GM	M		●	★	12.7	6.35	0.4	5.16
DNMG150608-GM	M		●	●	12.7	6.35	0.8	5.16
DNMG150408-GH	M			●	12.7	4.76	0.8	5.16
DNMG150412-GH	M			★	12.7	4.76	1.2	5.16
DNMG150608-GH	M			●	12.7	6.35	0.8	5.16
DNMG150612-GH	M			●	12.7	6.35	1.2	5.16
DNMG150408-RM	R	●	●	●	12.7	4.76	0.8	5.16
DNMG150412-RM	R		●	★	12.7	4.76	1.2	5.16
DNMG150416-RM	R		★	★	12.7	4.76	1.6	5.16
DNMG150608-RM	R		●	●	12.7	6.35	0.8	5.16
DNMG150612-RM	R		●	★	12.7	6.35	1.2	5.16

1/1

(10 inserts in one case)





SNMG, SNMM

NEGATIVE INSERTS (WITH HOLE)

M Class

SNMG, SNMM

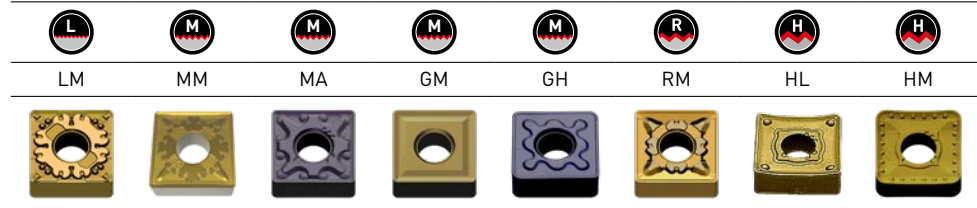

Order number		MC7115	MC7125	MP7135	IC	S	RE	D1
SNMG120404-LM	L	●	★	★	12.7	4.76	0.4	5.16
SNMG120408-LM	L	●	●	★	12.7	4.76	0.8	5.16
SNMG120408-MM	M	●	●	●	12.7	4.76	0.8	5.16
SNMG120412-MM	M	●	●	●	12.7	4.76	1.2	5.16
SNMG120416-MM	M	★	★	★	12.7	4.76	1.6	5.16
SNMG150608-MM	M		●	★	15.875	6.35	0.8	6.35
SNMG150612-MM	M	●	●	★	15.875	6.35	1.2	6.35
SNMG150616-MM	M		★		15.875	6.35	1.6	6.35
SNMG190612-MM	M		●	●	19.05	6.35	1.2	7.93
SNMG190616-MM	M		●	●	19.05	6.35	1.6	7.93
SNMG120404-MA	M		●	★	12.7	4.76	0.4	5.16
SNMG120408-MA	M		●	●	12.7	4.76	0.8	5.16
SNMG120412-MA	M		★	●	12.7	4.76	1.2	5.16
SNMG150608-MA	M		●	●	15.875	6.35	0.8	6.35
SNMG150612-MA	M		●	●	15.875	6.35	1.2	6.35
SNMG190616-MA	M		●	●	19.05	6.35	1.6	7.93
SNMG120404-GM	M		●	★	12.7	4.76	0.4	5.16
SNMG120408-GM	M		●	●	12.7	4.76	0.8	5.16
SNMG120412-GM	M		★	●	12.7	4.76	1.2	5.16
SNMG120408-GH	M			●	12.7	4.76	0.8	5.16
SNMG120412-GH	M			★	12.7	4.76	1.2	5.16
SNMG120416-GH	M			●	12.7	4.76	1.6	5.16
SNMG190612-GH	M			●	19.05	6.35	1.2	7.93
SNMG190616-GH	M			●	19.05	6.35	1.6	7.93
SNMG120408-RM	R	★	●	●	12.7	4.76	0.8	5.16
SNMG120412-RM	R	★	●	●	12.7	4.76	1.2	5.16
SNMG120416-RM	R	★	★	●	12.7	4.76	1.6	5.16
SNMG150612-RM	R	●	★	●	15.875	6.35	1.2	6.35
SNMG150616-RM	R	●			15.875	6.35	1.6	6.35
SNMG190612-RM	R	★	●	★	19.05	6.35	1.2	7.93
SNMG190616-RM	R	●	●	●	19.05	6.35	1.6	7.93
SNMM190612-HL	H		★		19.05	6.35	1.2	7.93
SNMM190616-HL	H		★		19.05	6.35	1.6	7.93
SNMM190612-HM	H		●		19.05	6.35	1.2	7.93
SNMM190616-HM	H		●		19.05	6.35	1.6	7.93
SNMM250732-HM	H		●		25.4	7.94	3.2	9.12

1/1

(10 inserts in one case)





● : Inventory maintained. ★ : Inventory maintained in Japan.

TNMG, TNMX

NEGATIVE INSERTS (WITH HOLE)

M Class

TNMG, TNMX

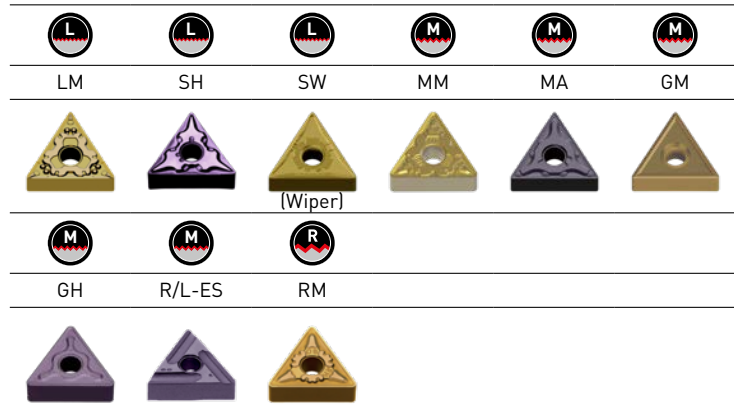

Order number		MC7115	MC7125	MP7135	IC	S	RE	D1
TNMG160404-LM	L	●	●	●	9.525	4.76	0.4	3.81
TNMG160408-LM	L	★	●	●	9.525	4.76	0.8	3.81
TNMG160412-LM	L	★	★	★	9.525	4.76	1.2	3.81
TNMG160404-SH	L			●	9.525	4.76	0.4	3.81
TNMG160408-SH	L			●	9.525	4.76	0.8	3.81
TNMX160408-SW	L		★		9.525	4.76	0.8	3.81
TNMG160408-MM	M	●	●	●	9.525	4.76	0.8	3.81
TNMG160412-MM	M	★	★	★	9.525	4.76	1.2	3.81
TNMG220408-MM	M	★	●	★	12.7	4.76	0.8	5.16
TNMG220412-MM	M		★	★	12.7	4.76	1.2	5.16
TNMG220416-MM	M		●		12.7	4.76	1.6	5.16
TNMG160404-MA	M		●	●	9.525	4.76	0.4	3.81
TNMG160408-MA	M		●	●	9.525	4.76	0.8	3.81
TNMG160412-MA	M		★	●	9.525	4.76	1.2	3.81
TNMG220408-MA	M		●	●	12.7	4.76	0.8	5.16
TNMG220412-MA	M		★	●	12.7	4.76	1.2	5.16
TNMG160404-GM	M		●	●	9.525	4.76	0.4	3.81
TNMG160408-GM	M		●	●	9.525	4.76	0.8	3.81
TNMG160412-GM	M		●	★	9.525	4.76	1.2	3.81
TNMG220408-GM	M		★	★	12.7	4.76	0.8	5.16
TNMG160408-GH	M			●	9.525	4.76	0.8	3.81
TNMG220408-GH	M			●	12.7	4.76	0.8	5.16
TNMG220412-GH	M			●	12.7	4.76	1.2	5.16
TNMG160404R-ES	M		●	●	9.525	4.76	0.4	3.81
TNMG160404L-ES	M		●	●	9.525	4.76	0.8	3.81
TNMG160408R-ES	M		●	●	9.525	4.76	0.8	3.81
TNMG160408L-ES	M		●	●	9.525	4.76	0.8	3.81
TNMG220408R-ES	M			●	12.7	4.76	0.8	5.16
TNMG220408L-ES	M			●	12.7	4.76	0.8	5.16
TNMG160408-RM	R	★	●	★	9.525	4.76	0.8	3.81
TNMG160412-RM	R	★	★	●	9.525	4.76	1.2	3.81
TNMG220408-RM	R		●	★	12.7	4.76	0.8	5.16
TNMG220412-RM	R		★	★	12.7	4.76	1.2	5.16
TNMG220416-RM	R		●	★	12.7	4.76	1.6	5.16

1/1

(10 inserts in one case)



● : Inventory maintained. ★ : Inventory maintained in Japan.

VNMG

NEGATIVE INSERTS (WITH HOLE)

M Class

VNMG

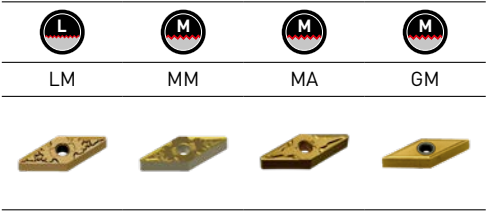

Order number	F L M R H		MC7115	MC7125	MP7135	IC	S	RE	D1
VNMG160404-LM	L		●	●	●	9.525	4.76	0.4	3.81
VNMG160408-LM	L		★	●	★	9.525	4.76	0.8	3.81
VNMG160408-MM	M		●	●	●	9.525	4.76	0.8	3.81
VNMG160404-MA	M			●	●	9.525	4.76	0.4	3.81
VNMG160408-MA	M			●	●	9.525	4.76	0.8	3.81
VNMG160404-GM	M			●	★	9.525	4.76	0.4	3.81
VNMG160408-GM	M			●	●	9.525	4.76	0.8	3.81

1/1

[10 inserts in one case]




WNMG

NEGATIVE INSERTS (WITH HOLE)

M Class

WNMG



Order number		MC7115	MC7125	MP7135	IC	S	RE	D1
WNMG060404-LM	L	●	●	●	9.525	4.76	0.4	3.81
WNMG060408-LM	L	●	●	★	9.525	4.76	0.8	3.81
WNMG080404-LM	L	●	●	●	12.7	4.76	0.4	5.16
WNMG080408-LM	L	●	●	●	12.7	4.76	0.8	5.16
WNMG06T304-SH	L			●	9.525	3.97	0.4	3.81
WNMG06T308-SH	L			●	9.525	3.97	0.8	3.81
WNMG060404-SH	L			●	9.525	4.76	0.4	3.81
WNMG060408-SH	L			●	9.525	4.76	0.8	3.81
WNMG080404-SH	L			●	12.7	4.76	0.4	5.16
WNMG080408-SH	L			●	12.7	4.76	0.8	5.16
WNMG060408-MM	M	★	●	●	9.525	4.76	0.8	3.81
WNMG060412-MM	M		●	●	9.525	4.76	1.2	3.81
WNMG080408-MM	M	●	●	●	12.7	4.76	0.8	5.16
WNMG080412-MM	M	●	●	●	12.7	4.76	1.2	5.16
WNMG06T304-MA	M		●	●	9.525	3.97	0.4	3.81
WNMG06T308-MA	M		●	●	9.525	3.97	0.8	3.81
WNMG06T312-MA	M		★	★	9.525	3.97	1.2	3.81
WNMG060408-MA	M		●	●	9.525	4.76	0.8	3.81
WNMG060412-MA	M		★	●	9.525	4.76	1.2	3.81
WNMG080404-MA	M		●	●	12.7	4.76	0.4	5.16
WNMG080408-MA	M		●	●	12.7	4.76	0.8	5.16
WNMG080412-MA	M		●	●	12.7	4.76	1.2	5.16
WNMG060404-GM	M		●	●	9.525	4.76	0.4	3.81
WNMG060408-GM	M		●	●	9.525	4.76	0.8	3.81
WNMG080404-GM	M		●	●	12.7	4.76	0.4	5.16
WNMG080408-GM	M		●	●	12.7	4.76	0.8	5.16
WNMG080412-GM	M		●	●	12.7	4.76	1.2	5.16
WNMG080408-GH	M			●	12.7	4.76	0.8	5.16
WNMG080412-GH	M			●	12.7	4.76	1.2	5.16
WNMG060408-RM	R	●	★	★	9.525	4.76	0.8	3.81
WNMG060412-RM	R		★	●	9.525	4.76	1.2	3.81
WNMG080408-RM	R	●	●	●	12.7	4.76	0.8	5.16
WNMG080412-RM	R	●	●	●	12.7	4.76	1.2	5.16

1/1

(10 inserts in one case)


● : Inventory maintained. ★ : Inventory maintained in Japan.

CCMT, CCMH, CPMH



7°, 11° POSITIVE INSERTS (WITH HOLE)

M Class

CCMT, CCMH



CPMH

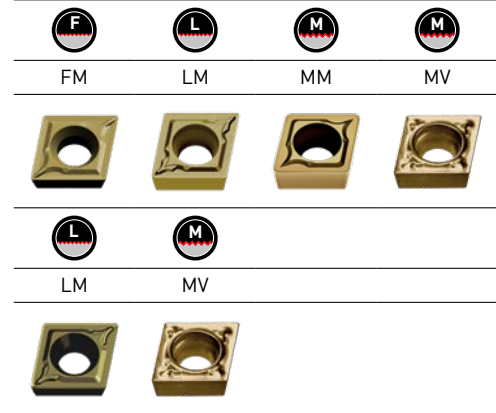

Order number						IC	S	RE	D1
	MC7115	MC7125	MP7135						
CCMT060202-FM	F	★				6.35	2.38	0.2	2.8
CCMT060204-FM	F	★	★	★		6.35	2.38	0.4	2.8
CCMT09T302-FM	F		★			9.525	3.97	0.2	4.4
CCMT09T304-FM	F	★	★	★		9.525	3.97	0.4	4.4
CCMT09T308-FM	F	★	★	★		9.525	3.97	0.8	4.4
CCMT060204-LM	L	●	●	●		6.35	2.38	0.4	2.8
CCMT060208-LM	L	●	●	★		6.35	2.38	0.8	2.8
CCMT09T304-LM	L	●	●	●		9.525	3.97	0.4	4.4
CCMT09T308-LM	L	●	●	●		9.525	3.97	0.8	4.4
CCMT060202-MM	M		●	●		6.35	2.38	0.2	2.8
CCMT060204-MM	M	●	●	●		6.35	2.38	0.4	2.8
CCMT060208-MM	M	●	●	●		6.35	2.38	0.8	2.8
CCMT09T302-MM	M		●	●		9.525	3.97	0.2	4.4
CCMT09T304-MM	M	●	●	●		9.525	3.97	0.4	4.4
CCMT09T308-MM	M	●	●	●		9.525	3.97	0.8	4.4
CCMT120404-MM	M	●	●	●		12.7	4.76	0.4	5.5
CCMT120408-MM	M	●	●	●		12.7	4.76	0.8	5.5
CCMT120412-MM	M	●	●	★		12.7	4.76	1.2	5.5
CCMH060202-MV	M		●	●		6.35	2.38	0.2	2.8
CCMH060204-MV	M		●	●		6.35	2.38	0.4	2.8
CPMH080204-LM	L	●	●	●		7.94	2.38	0.4	3.5
CPMH080208-LM	L	●	●	●		7.94	2.38	0.8	3.5
CPMH090304-LM	L	●	●	●		9.525	3.18	0.4	4.4
CPMH090308-LM	L	●	●	●		9.525	3.18	0.8	4.4
CPMH080204-MV	M		●	●		7.94	2.38	0.4	3.5
CPMH080208-MV	M		●	●		7.94	2.38	0.8	3.5
CPMH090304-MV	M		●	●		9.525	3.18	0.4	4.4
CPMH090308-MV	M		●	●		9.525	3.18	0.8	4.4

1/1

(10 inserts in one case)





DCMT

7° POSITIVE INSERTS (WITH HOLE)

M Class

DCMT

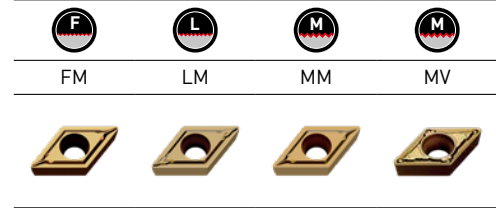

Order number	F L M R H		MC7115	MC7125	MP7135	IC	S	RE	D1
DCMT070202-FM	F			★		6.35	2.38	0.2	2.8
DCMT070204-FM	F		★	★		6.35	2.38	0.4	2.8
DCMT11T302-FM	F			★		9.525	3.97	0.2	4.4
DCMT11T304-FM	F		★	★	★	9.525	3.97	0.4	4.4
DCMT11T308-FM	F		★	★	★	9.525	3.97	0.8	4.4
DCMT070202-LM	L			★		6.35	2.38	0.2	2.8
DCMT070204-LM	L		●	●	●	6.35	2.38	0.4	2.8
DCMT070208-LM	L		●	●	●	6.35	2.38	0.8	2.8
DCMT11T302-LM	L			★		9.525	3.97	0.2	4.4
DCMT11T304-LM	L		★	●	●	9.525	3.97	0.4	4.4
DCMT11T308-LM	L		●	●	●	9.525	3.97	0.8	4.4
DCMT070202-MM	M			●	●	6.35	2.38	0.2	2.8
DCMT070204-MM	M		●	●	●	6.35	2.38	0.4	2.8
DCMT070208-MM	M		●	●	★	6.35	2.38	0.8	2.8
DCMT11T302-MM	M			●		9.525	3.97	0.2	4.4
DCMT11T304-MM	M		●	●	●	9.525	3.97	0.4	4.4
DCMT11T308-MM	M		●	●	●	9.525	3.97	0.8	4.4
DCMT150404-MM	M		●	●	★	12.7	4.76	0.4	5.5
DCMT150408-MM	M		●	●	●	12.7	4.76	0.8	5.5
DCMT070202-MV	M			●	●	6.35	2.38	0.2	2.8
DCMT070204-MV	M			●	●	6.35	2.38	0.4	2.8
DCMT070208-MV	M			●	●	6.35	2.38	0.8	2.8
DCMT11T302-MV	M			●		9.525	3.97	0.2	4.4
DCMT11T304-MV	M			●	●	9.525	3.97	0.4	4.4
DCMT11T308-MV	M			●	●	9.525	3.97	0.8	4.4

1/1

1/1

(10 inserts in one case)



23 

SCMT

7° POSITIVE INSERTS (WITH HOLE)

M Class

SCMT



Order number		MC7115	MC7125	MP7135	IC	S	RE	D1
SCMT09T304-LM	L	●	★	★	9.525	3.97	0.4	4.4
SCMT09T308-LM	L	●	★	★	9.525	3.97	0.8	4.4
SCMT09T304-MM	M	●	●	★	9.525	3.97	0.4	4.4
SCMT09T308-MM	M	●	●	★	9.525	3.97	0.8	4.4
SCMT120404-MM	M	●	●	★	12.7	4.76	0.4	5.5
SCMT120408-MM	M	●	●	●	12.7	4.76	0.8	5.5

1/1

[10 inserts in one case]


23 

TCMT, TPMH


7°, 11° POSITIVE INSERTS (WITH HOLE)

M Class

TCMT



TPMH



Order number						IC	S	RE	D1
	MC7115	MC7125	MP7135						
TCMT090204-FM	F	★	★	★		5.56	2.38	0.4	2.5
TCMT090204-LM	L		●	★		5.56	2.38	0.4	2.5
TCMT110204-LM	L		●	●		6.35	2.38	0.4	2.8
TCMT110208-LM	L		●	●		6.35	2.38	0.8	2.8
TCMT16T304-LM	L	●	●	★		9.525	3.97	0.4	4.4
TCMT16T308-LM	L	●	●	★		9.525	3.97	0.8	4.4
TCMT090204-MM	M		●	★		5.56	2.38	0.4	2.5
TCMT090208-MM	M			★		5.56	2.38	0.8	2.5
TCMT110204-MM	M		●	●		6.35	2.38	0.4	2.8
TCMT110208-MM	M	★	●	★		6.35	2.38	0.8	2.8
TCMT130304-MM	M			★		7.94	3.18	0.4	3.4
TCMT16T304-MM	M	●	●	●		9.525	3.97	0.4	4.4
TCMT16T308-MM	M	●	●	●		9.525	3.97	0.8	4.4
TCMT16T312-MM	M		●	●		9.525	3.97	1.2	4.4
TPMH090204-LM	L		●	●		5.56	2.38	0.4	2.9
TPMH110304-LM	L		●	●		6.35	3.18	0.4	3.4
TPMH110308-LM	L		●	●		6.35	3.18	0.8	3.4
TPMH160304-LM	L		●	●		9.525	3.18	0.4	4.4
TPMH160308-LM	L		●	●		9.525	3.18	0.8	4.4
TPMH080202-MV	M		●	●		4.76	2.38	0.2	2.4
TPMH080204-MV	M		●	●		4.76	2.38	0.4	2.4
TPMH090204-MV	M		●	●		5.56	2.38	0.4	2.9
TPMH090208-MV	M		★	★		5.56	2.38	0.8	2.9
TPMH110302-MV	M		★	★		6.35	3.18	0.2	3.4
TPMH110304-MV	M		●	●		6.35	3.18	0.4	3.4
TPMH110308-MV	M		★	●		6.35	3.18	0.8	3.4
TPMH160304-MV	M		●	●		9.525	3.18	0.4	4.4
TPMH160308-MV	M		●	●		9.525	3.18	0.8	4.4

1/1

(10 inserts in one case)




VBMT, VCMT



5°, 7° POSITIVE INSERTS (WITH HOLE)

M Class

VBMT



VCMT

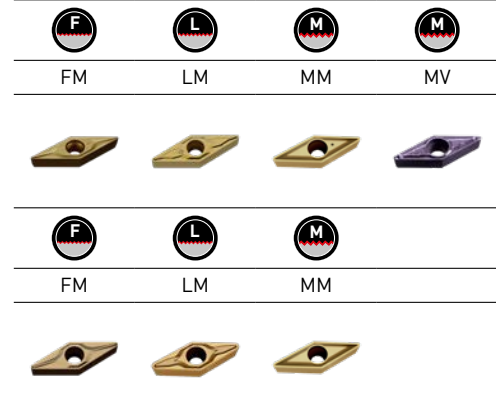

Order number		MC7115	MC7125	MP7135	IC	S	RE	D1
VBMT110302-FM	F		★	★	6.35	3.18	0.2	2.9
VBMT110304-FM	F	★	★	★	6.35	3.18	0.4	2.9
VBMT110308-FM	F	★	★		6.35	3.18	0.8	2.9
VBMT160404-FM	F	★	★	★	9.525	4.76	0.4	4.4
VBMT160408-FM	F	★	★		9.525	4.76	0.8	4.4
VBMT110304-LM	L	●	●	●	6.35	3.18	0.4	2.9
VBMT110308-LM	L	●	★	★	6.35	3.18	0.8	2.9
VBMT160404-LM	L	●	●	●	9.525	4.76	0.4	4.4
VBMT160408-LM	L	●	●	★	9.525	4.76	0.8	4.4
VBMT160404-MM	M	●	●	●	9.525	4.76	0.4	4.4
VBMT160408-MM	M	●	●	●	9.525	4.76	0.8	4.4
VBMT110304-MV	M		●	●	6.35	3.18	0.4	2.9
VBMT110308-MV	M		★	★	6.35	3.18	0.8	2.9
VBMT160404-MV	M		●	●	9.525	4.76	0.4	4.4
VBMT160408-MV	M		●	●	9.525	4.76	0.8	4.4
VCMT110302-FM	F		★	★	6.35	3.18	0.2	2.8
VCMT110304-FM	F	★	★	★	6.35	3.18	0.4	2.8
VCMT160404-FM	F	★	★	★	9.525	4.76	0.4	4.4
VCMT110304-LM	L	●	●	●	6.35	3.18	0.4	2.8
VCMT110308-LM	L	●	●	●	6.35	3.18	0.8	2.8
VCMT160404-LM	L	●	●	●	9.525	4.76	0.4	4.4
VCMT160408-LM	L	●	●	★	9.525	4.76	0.8	4.4
VCMT160404-MM	M	●	●	●	9.525	4.76	0.4	4.4
VCMT160408-MM	M	●	●	●	9.525	4.76	0.8	4.4
VCMT160412-MM	M		★	★	9.525	4.76	1.2	4.4
VCMT080202-MV	M		●	●	4.76	2.38	0.2	2.4
VCMT080204-MV	M		●	●	4.76	2.38	0.4	2.4

1/1

(10 inserts in one case)




WBMT, WCMT, WPMT

5°, 7°, 11° POSITIVE INSERTS (WITH HOLE)

M Class

WBMT



L-MV




MM




MV



WCMT



WPMT



Order number

MC7115

MC7125

MP7135

IC

S

RE

D1

WBMTL30202L-MV	M	★		4.76	2.38	0.2	2.3
WBMTL30204L-MV	M	★		4.76	2.38	0.4	2.3
WCMT020102-MM	M	●	●	3.97	1.59	0.2	2.3
WCMT020104-MM	M	●	●	3.97	1.59	0.4	2.3
WCMTL30202-MM	M	●	●	4.76	2.38	0.2	2.3
WCMTL30204-MM	M	●	●	4.76	2.38	0.4	2.3
WCMT040202-MM	M	●	●	6.35	2.38	0.2	2.8
WCMT040204-MM	M	●	●	6.35	2.38	0.4	2.8
WCMT06T304-MM	M	●	●	9.525	3.97	0.4	4.4
WCMT06T308-MM	M	●	●	9.525	3.97	0.8	4.4
WPMT040204-MV	M	●	●	6.35	2.38	0.4	2.8
WPMT060304-MV	M	●	●	9.525	3.18	0.4	4.4
WPMT060308-MV	M	●	●	9.525	3.18	0.8	4.4

1/1

(10 inserts in one case)



MC/MP7100 SERIES

RECOMMENDED CUTTING CONDITIONS

NEGATIVE INSERTS (FOR EXTERNAL TURNING)

Material	Hardness	Cutting mode	F L M R H	Priority	Grade		Vc	f	ap	
M Austenitic stainless steel	<200 HB		L	1	MC7115	LM	185 – 295	0.10 – 0.35	0.3 – 2.0	
			L	2	MC7125	LM	175 – 240	0.10 – 0.35	0.3 – 2.0	
			L	3	MC7125	SW	175 – 240	0.10 – 0.50	0.3 – 2.5	
			M	1	MC7115	MM	170 – 270	0.15 – 0.45	0.7 – 5.0	
			R	1	MC7115	RM	160 – 255	0.25 – 0.55	1.5 – 6.0	
			H	1	MC7125	HL	135 – 185	0.30 – 0.70	3.0 – 7.5	
			L	1	MC7125	LM	175 – 240	0.10 – 0.35	0.3 – 2.0	
			M	1	MC7125	MM	160 – 220	0.15 – 0.45	0.7 – 5.0	
			M	2	MC7125	GM	160 – 220	0.16 – 0.50	0.5 – 4.0	
			M	3	MC7125	MA	160 – 220	0.20 – 0.50	0.3 – 4.0	
			M	4	MC7125	R/L-ES	160 – 220	0.20 – 0.50	0.8 – 4.0	
			M	5	MP7135	GM	120 – 155	0.16 – 0.50	0.5 – 4.0	
			M	6	MP7135	MM	120 – 155	0.15 – 0.45	0.7 – 5.0	
			M	7	MP7135	MA	120 – 155	0.20 – 0.50	0.3 – 4.0	
			R	1	MC7125	RM	150 – 205	0.25 – 0.55	1.5 – 6.0	
			R	2	MP7135	RM	110 – 145	0.25 – 0.55	1.5 – 6.0	
			R	3	MP7135	GH	110 – 145	0.25 – 0.60	1.5 – 6.0	
			H	1	MC7125	HL	135 – 185	0.30 – 0.70	3.0 – 7.5	
			H	2	MC7125	HM	135 – 185	0.50 – 1.10	2.0 – 10.0	
			L	1	MP7135	LM	130 – 170	0.10 – 0.35	0.3 – 2.0	
			L	2	MP7135	SH	130 – 170	0.10 – 0.40	0.3 – 2.0	
			M	1	MP7135	GM	120 – 155	0.16 – 0.50	0.5 – 4.0	
			M	2	MP7135	MM	120 – 155	0.15 – 0.45	0.7 – 5.0	
			M	3	MP7135	MA	120 – 155	0.20 – 0.50	0.3 – 4.0	
			M	4	MC7125	R/L-ES	160 – 220	0.20 – 0.50	0.8 – 4.0	
			R	1	MP7135	RM	110 – 145	0.25 – 0.55	1.5 – 6.0	
			R	2	MP7135	GH	110 – 145	0.25 – 0.60	1.5 – 6.0	
			H	1	MC7125	HL	135 – 185	0.30 – 0.70	3.0 – 7.5	
			H	2	MC7125	HM	135 – 185	0.50 – 1.10	2.0 – 10.0	
		200 HB		L	1	MC7115	LM	155 – 245	0.10 – 0.35	0.3 – 2.0
				L	2	MC7125	LM	145 – 200	0.10 – 0.35	0.3 – 2.0
				M	1	MC7115	MM	140 – 225	0.15 – 0.45	0.7 – 0.5
			R	1	MC7115	RM	135 – 215	0.25 – 0.55	1.5 – 6.0	
			H	1	MC7125	HL	110 – 155	0.30 – 0.70	3.0 – 7.5	
			H	2	MC7125	HM	110 – 155	0.50 – 1.10	2.0 – 10.0	
			L	1	MC7125	LM	145 – 200	0.10 – 0.35	0.3 – 2.0	
			M	1	MC7125	MM	130 – 180	0.15 – 0.45	0.7 – 5.0	
			M	2	MC7125	GM	130 – 180	0.16 – 0.50	0.5 – 4.0	
			M	3	MC7125	MA	130 – 180	0.20 – 0.50	0.3 – 4.0	
			M	4	MP7135	GM	100 – 130	0.16 – 0.50	0.5 – 4.0	
			M	5	MP7135	MM	100 – 130	0.15 – 0.45	0.7 – 5.0	
			M	6	MP7135	MA	100 – 130	0.20 – 0.50	0.3 – 4.0	
			R	1	MC7125	RM	125 – 175	0.25 – 0.55	1.5 – 6.0	
			R	2	MP7135	RM	95 – 120	0.25 – 0.55	1.5 – 6.0	
			R	3	MP7135	GH	95 – 120	0.25 – 0.60	1.5 – 6.0	
			H	1	MC7125	HL	110 – 155	0.30 – 0.70	3.0 – 7.5	
			H	2	MC7125	HM	110 – 155	0.50 – 1.10	2.0 – 10.0	
			L	1	MP7135	LM	110 – 140	0.10 – 0.35	0.3 – 2.0	
			L	2	MP7135	SH	110 – 140	0.10 – 0.40	0.3 – 2.0	
			M	1	MP7135	GM	100 – 130	0.16 – 0.50	0.5 – 4.0	
			M	2	MP7135	MM	100 – 130	0.15 – 0.45	0.7 – 5.0	
			M	3	MP7135	MA	100 – 130	0.20 – 0.50	0.3 – 4.0	
			R	1	MP7135	RM	95 – 120	0.25 – 0.55	1.5 – 6.0	
		R	2	MP7135	GH	95 – 120	0.25 – 0.60	1.5 – 6.0		
		H	1	MC7125	HL	110 – 155	0.30 – 0.70	3.0 – 7.5		
		H	2	MC7125	HM	110 – 155	0.50 – 1.10	2.0 – 10.0		

1/8

1/8

1. Recommended cutting conditions for 5° / 7° / 11° positive inserts are provided as a guideline only.
Verify the recommended conditions for each boring bar as cutting conditions for internal machining will vary depending on the length of overhang.

Cutting Conditions : ● : Stable cutting ● : General cutting ✖ : Unstable cutting

MC/MP7100 SERIES – NEGATIVE INSERTS (FOR EXTERNAL TURNING)

Material	Hardness	Cutting mode	F L M R H	Priority	Grade		Vc	f	ap	
M	<200 HB		L	1	MC7115	LM	185 – 295	0.10 – 0.35	0.3 – 2.0	
			L	2	MC7125	LM	175 – 240	0.10 – 0.35	0.3 – 2.0	
			M	1	MC7115	MM	170 – 270	0.15 – 0.45	0.7 – 5.0	
			R	1	MC7115	RM	160 – 255	0.25 – 0.55	1.5 – 6.0	
			H	1	MC7125	HL	135 – 185	0.30 – 0.70	3.0 – 7.5	
			H	2	MC7125	HM	135 – 185	0.50 – 1.10	2.0 – 10.0	
			L	1	MC7125	LM	175 – 240	0.10 – 0.35	0.3 – 2.0	
			M	1	MC7125	MM	160 – 220	0.15 – 0.45	0.7 – 5.0	
			M	2	MC7125	GM	160 – 220	0.16 – 0.50	0.5 – 4.0	
			M	3	MC7125	MA	160 – 220	0.20 – 0.50	0.3 – 4.0	
			M	4	MP7135	GM	120 – 155	0.16 – 0.50	0.5 – 4.0	
			M	5	MP7135	MM	120 – 155	0.15 – 0.45	0.7 – 5.0	
			M	6	MP7135	MA	120 – 155	0.20 – 0.50	0.3 – 4.0	
			R	1	MC7125	RM	150 – 205	0.25 – 0.55	1.5 – 6.0	
			R	2	MP7135	RM	110 – 145	0.25 – 0.55	1.5 – 6.0	
			R	3	MP7135	GH	110 – 145	0.25 – 0.60	1.5 – 6.0	
			H	1	MC7125	HL	135 – 185	0.30 – 0.70	3.0 – 7.5	
			H	2	MC7125	HM	135 – 185	0.50 – 1.10	2.0 – 10.0	
			L	1	MP7135	LM	130 – 170	0.10 – 0.35	0.3 – 2.0	
			L	2	MP7135	SH	130 – 170	0.10 – 0.40	0.3 – 2.0	
			M	1	MP7135	GM	120 – 155	0.16 – 0.50	0.5 – 4.0	
			M	2	MP7135	MM	120 – 155	0.15 – 0.45	0.7 – 5.0	
			M	3	MP7135	MA	120 – 155	0.20 – 0.50	0.3 – 4.0	
			R	1	MP7135	RM	110 – 145	0.25 – 0.55	1.5 – 6.0	
			R	2	MP7135	GH	110 – 145	0.25 – 0.60	1.5 – 6.0	
			H	1	MC7125	HL	135 – 185	0.30 – 0.70	3.0 – 7.5	
			H	2	MC7125	HM	135 – 185	0.50 – 1.10	2.0 – 10.0	
		>200 HB		L	1	MC7115	LM	155 – 245	0.10 – 0.35	0.3 – 2.0
				L	2	MC7125	LM	145 – 200	0.10 – 0.35	0.3 – 2.0
				L	3	MC7125	SW	145 – 200	0.10 – 0.50	0.3 – 2.5
				M	1	MC7115	MM	140 – 225	0.15 – 0.45	0.7 – 5.0
				R	1	MC7115	RM	135 – 215	0.25 – 0.55	1.5 – 6.0
				H	1	MC7125	HL	110 – 155	0.30 – 0.70	3.0 – 7.5
			H	2	MC7125	HM	110 – 155	0.50 – 1.10	2.0 – 10.0	
			L	1	MC7125	LM	145 – 200	0.10 – 0.35	0.3 – 2.0	
			M	1	MC7125	MM	130 – 180	0.15 – 0.45	0.7 – 5.0	
			M	2	MC7125	GM	130 – 180	0.16 – 0.50	0.5 – 4.0	
			M	3	MC7125	MA	130 – 180	0.20 – 0.50	0.3 – 4.0	
			M	4	MP7135	GM	100 – 130	0.16 – 0.50	0.5 – 4.0	
			M	5	MP7135	MM	100 – 130	0.15 – 0.45	0.7 – 5.0	
			M	6	MP7135	MA	100 – 130	0.20 – 0.50	0.3 – 4.0	
			M	7	MP7135	R/L-ES	100 – 130	0.20 – 0.50	0.8 – 4.0	
			R	1	MC7125	RM	125 – 175	0.25 – 0.55	1.5 – 6.0	
			H	1	MC7125	HL	110 – 155	0.30 – 0.70	3.0 – 7.5	
			H	2	MC7125	HM	110 – 155	0.50 – 1.10	2.0 – 10.0	
			L	1	MP7135	LM	110 – 140	0.10 – 0.35	0.3 – 2.0	
			L	2	MP7135	SH	110 – 140	0.10 – 0.40	0.3 – 2.0	
			M	1	MP7135	GM	100 – 130	0.16 – 0.50	0.5 – 4.0	
			M	2	MP7135	MM	100 – 130	0.15 – 0.45	0.7 – 5.0	
		M	3	MP7135	MA	100 – 130	0.20 – 0.50	0.3 – 4.0		
		M	4	MP7135	R/L-ES	100 – 130	0.20 – 0.50	0.8 – 4.0		
		R	1	MP7135	RM	95 – 120	0.25 – 0.55	1.5 – 6.0		
		R	2	MP7135	GH	95 – 120	0.25 – 0.60	1.5 – 6.0		
		H	1	MC7125	HL	110 – 155	0.30 – 0.70	3.0 – 7.5		
		H	2	MC7125	HM	110 – 155	0.50 – 1.10	2.0 – 10.0		

2/8

2/8

1. Recommended cutting conditions for 5° / 7° / 11° positive inserts are provided as a guideline only.
Verify the recommended conditions for each boring bar as cutting conditions for internal machining will vary depending on the length of overhang.

MC/MP7100 SERIES – NEGATIVE INSERTS (FOR EXTERNAL TURNING)

Material	Hardness	Cutting mode	F L M R H	Priority	Grade		Vc	f	ap
M Two-phase stainless steel	<280 HB		L	1	MP7135	LM	85 – 115	0.10 – 0.35	0.3 – 2.0
			L	2	MP7135	SH	85 – 115	0.10 – 0.40	0.3 – 2.0
			L	3	MC7125	LM	115 – 160	0.10 – 0.35	0.3 – 2.0
			L	4	MC7125	SW	115 – 160	0.10 – 0.50	0.3 – 2.5
			L	5	MC7115	LM	125 – 200	0.10 – 0.35	0.3 – 2.0
			M	1	MP7135	GM	80 – 105	0.16 – 0.50	0.5 – 4.0
			M	2	MP7135	MM	80 – 105	0.15 – 0.45	0.7 – 5.0
			M	3	MP7135	MA	80 – 105	0.20 – 0.50	0.3 – 4.0
			M	4	MC7125	MM	105 – 145	0.15 – 0.45	0.7 – 5.0
			M	5	MC7125	GM	105 – 145	0.16 – 0.50	0.5 – 4.0
			M	6	MC7125	MA	105 – 145	0.20 – 0.50	0.3 – 4.0
			M	7	MC7115	MM	115 – 180	0.15 – 0.45	0.7 – 5.0
			R	1	MP7135	RM	75 – 100	0.25 – 0.55	1.5 – 6.0
			R	2	MP7135	GH	75 – 100	0.25 – 0.60	1.5 – 6.0
			R	3	MC7125	RM	100 – 140	0.25 – 0.55	1.5 – 6.0
			H	1	MC7125	HL	90 – 125	0.30 – 0.70	3.0 – 7.5
			H	2	MC7125	HM	90 – 125	0.50 – 1.10	2.0 – 10.0
			L	1	MP7135	LM	85 – 115	0.10 – 0.35	0.3 – 2.0
			L	2	MP7135	SH	85 – 115	0.10 – 0.40	0.3 – 2.0
			L	3	MC7125	LM	115 – 160	0.10 – 0.35	0.3 – 2.0
			M	1	MP7135	GM	80 – 105	0.16 – 0.50	0.5 – 4.0
			M	2	MP7135	MM	80 – 105	0.15 – 0.45	0.7 – 5.0
			M	3	MP7135	MA	80 – 105	0.20 – 0.50	0.3 – 4.0
			M	4	MP7135	R/L-ES	80 – 105	0.20 – 0.50	0.8 – 4.0
			M	5	MC7125	MM	105 – 145	0.15 – 0.45	0.7 – 5.0
			M	6	MC7125	GM	105 – 145	0.16 – 0.50	0.5 – 4.0
			M	7	MC7125	MA	105 – 145	0.20 – 0.50	0.3 – 4.0
			R	1	MP7135	RM	75 – 100	0.25 – 0.55	1.5 – 6.0
			R	2	MP7135	GH	75 – 100	0.25 – 0.60	1.5 – 6.0
			R	3	MC7125	RM	100 – 140	0.25 – 0.55	1.5 – 6.0
			H	1	MC7125	HL	90 – 125	0.30 – 0.70	3.0 – 7.5
			H	2	MC7125	HM	90 – 125	0.50 – 1.10	2.0 – 10.0
			L	1	MP7135	LM	85 – 115	0.10 – 0.35	0.3 – 2.0
			L	2	MP7135	SH	85 – 115	0.10 – 0.40	0.3 – 2.0
			M	1	MP7135	GM	80 – 105	0.16 – 0.50	0.5 – 4.0
			M	2	MP7135	MM	80 – 105	0.15 – 0.45	0.7 – 5.0
			M	3	MP7135	MA	80 – 105	0.20 – 0.50	0.3 – 4.0
			M	4	MP7135	R/L-ES	80 – 105	0.20 – 0.50	0.8 – 4.0
			R	1	MP7135	RM	75 – 100	0.25 – 0.55	1.5 – 6.0
			R	2	MP7135	GH	75 – 100	0.25 – 0.60	1.5 – 6.0
			H	1	MC7125	HL	90 – 125	0.30 – 0.70	3.0 – 7.5
			H	2	MC7125	HM	90 – 125	0.50 – 1.10	2.0 – 10.0

3/8

3/8

1. Recommended cutting conditions for 5° / 7° / 11° positive inserts are provided as a guideline only.
Verify the recommended conditions for each boring bar as cutting conditions for internal machining will vary depending on the length of overhang.

MC/MP7100 SERIES – NEGATIVE INSERTS (FOR EXTERNAL TURNING)

Material	Hardness	Cutting mode				Priority	Grade		Vc	f	ap
M Precipitation-hardening stainless steel	450 HB		L	1	MC7115	LM	110 – 165	0.10 – 0.35	0.3 – 2.0		
			L	2	MC7125	LM	95 – 120	0.10 – 0.35	0.3 – 2.0		
			L	3	MC7125	SW	95 – 120	0.10 – 0.50	0.3 – 2.5		
			M	1	MC7115	MM	100 – 150	0.15 – 0.45	0.7 – 5.0		
			R	1	MC7115	RM	95 – 140	0.25 – 0.55	1.5 – 6.0		
			H	1	MC7125	HL	75 – 90	0.40 – 1.00	1.5 – 8.0		
			H	2	MC7125	HM	75 – 90	0.50 – 1.10	2.0 – 10.0		
			L	1	MC7125	LM	95 – 120	0.10 – 0.35	0.3 – 2.0		
			L	2	MP7135	LM	70 – 95	0.10 – 0.35	0.3 – 2.0		
			L	3	MP7135	SH	70 – 95	0.10 – 0.40	0.3 – 2.0		
			M	1	MC7125	MM	90 – 110	0.15 – 0.45	0.7 – 5.0		
			M	2	MC7125	GM	90 – 110	0.16 – 0.50	0.5 – 4.0		
			M	3	MC7125	MA	90 – 110	0.10 – 0.30	0.5 – 3.0		
			M	4	MC7125	R/L-ES	90 – 110	0.20 – 0.50	0.8 – 3.0		
			M	5	MP7135	GM	65 – 90	0.16 – 0.50	0.5 – 4.0		
			M	6	MP7135	MM	65 – 90	0.15 – 0.45	0.7 – 5.0		
			M	7	MP7135	MA	65 – 90	0.10 – 0.30	0.5 – 3.0		
			R	1	MC7125	RM	85 – 100	0.25 – 0.55	1.5 – 6.0		
			R	2	MP7135	RM	60 – 85	0.25 – 0.55	1.5 – 6.0		
			R	3	MP7135	GH	60 – 85	0.25 – 0.60	1.5 – 6.0		
			H	1	MC7125	HL	75 – 90	0.40 – 1.00	1.5 – 8.0		
			H	2	MC7125	HM	75 – 90	0.50 – 1.00	2.0 – 10.0		
			L	1	MP7135	LM	70 – 95	0.10 – 0.35	0.3 – 2.0		
			L	2	MP7135	SH	70 – 95	0.10 – 0.40	0.3 – 2.0		
			M	1	MP7135	GM	65 – 90	0.16 – 0.50	0.5 – 4.0		
			M	2	MP7135	MM	65 – 90	0.15 – 0.45	0.7 – 5.0		
			M	3	MP7135	MA	65 – 90	0.10 – 0.30	0.5 – 3.0		
			R	1	MP7135	RM	60 – 85	0.25 – 0.55	1.5 – 6.0		
			R	2	MP7135	GH	60 – 85	0.25 – 0.60	1.5 – 6.0		
			H	1	MC7125	HL	75 – 90	0.40 – 1.00	1.5 – 8.0		
			H	2	MC7125	HM	75 – 90	0.50 – 1.10	2.0 – 10.0		

4/8

4/8

1. Recommended cutting conditions for 5° / 7° / 11° positive inserts are provided as a guideline only.
Verify the recommended conditions for each boring bar as cutting conditions for internal machining will vary depending on the length of overhang.

MC/MP7100 SERIES – 7° POSITIVE INSERTS (FOR EXTERNAL TURNING)

Material	Hardness	Cutting mode	F L M R H	Priority	Grade		Vc	f	ap
Austenitic stainless steel	<200 HB		F	1	MC7115	FM	160 – 255	0.04 – 0.20	0.2 – 0.9
			F	2	MC7125	FM	150 – 210	0.04 – 0.20	0.2 – 0.9
			L	1	MC7125	LM	150 – 210	0.06 – 0.25	0.2 – 1.0
			L	2	MC7115	LM	160 – 255	0.06 – 0.25	0.2 – 1.0
			M	1	MC7125	MM	125 – 175	0.08 – 0.30	0.3 – 2.0
			M	2	MC7125	MV	125 – 175	0.08 – 0.30	0.3 – 2.0
			M	3	MC7115	MM	135 – 215	0.08 – 0.30	0.3 – 2.0
			F	1	MC7125	FM	150 – 210	0.04 – 0.20	0.2 – 0.9
			L	1	MC7125	LM	150 – 210	0.06 – 0.25	0.2 – 1.0
			L	2	MP7135	LM	115 – 145	0.06 – 0.25	0.2 – 1.0
			M	1	MC7125	MM	125 – 175	0.08 – 0.30	0.3 – 2.0
			M	2	MC7125	MV	125 – 175	0.08 – 0.30	0.3 – 2.0
			F	1	MP7135	FM	115 – 145	0.04 – 0.20	0.2 – 0.9
			L	1	MP7135	LM	115 – 145	0.06 – 0.25	0.2 – 1.0
			M	1	MP7135	MM	95 – 120	0.08 – 0.30	0.3 – 2.0
			M	2	MP7135	MV	95 – 120	0.08 – 0.30	0.3 – 2.0
	200 HB		F	1	MC7115	FM	135 – 215	0.04 – 0.20	0.2 – 0.9
			F	2	MC7125	FM	125 – 175	0.04 – 0.20	0.2 – 0.9
			L	1	MC7125	LM	125 – 175	0.06 – 0.25	0.2 – 1.0
			L	2	MC7115	LM	135 – 215	0.06 – 0.25	0.2 – 1.0
			M	1	MC7125	MM	105 – 145	0.08 – 0.30	0.3 – 2.0
			M	2	MC7125	MV	105 – 145	0.08 – 0.30	0.3 – 2.0
			M	3	MC7115	MM	110 – 180	0.08 – 0.30	0.3 – 2.0
			F	1	MC7125	FM	125 – 175	0.04 – 0.20	0.2 – 0.9
			L	1	MC7125	LM	125 – 175	0.06 – 0.25	0.2 – 1.0
			L	2	MP7135	LM	95 – 120	0.06 – 0.25	0.2 – 1.0
			M	1	MC7125	MM	105 – 145	0.08 – 0.30	0.3 – 2.0
			M	2	MC7125	MV	105 – 145	0.08 – 0.30	0.3 – 2.0
			F	1	MP7135	FM	95 – 120	0.04 – 0.20	0.2 – 0.9
			L	1	MP7135	LM	95 – 120	0.06 – 0.25	0.2 – 1.0
			M	1	MP7135	MM	80 – 100	0.08 – 0.30	0.3 – 2.0
			M	2	MP7135	MV	80 – 100	0.08 – 0.30	0.3 – 2.0
Ferritic and martensitic stainless steel	<200 HB		F	1	MC7125	FM	150 – 210	0.04 – 0.20	0.2 – 0.9
			L	1	MC7125	LM	150 – 210	0.06 – 0.25	0.2 – 1.0
			L	2	MC7115	LM	160 – 255	0.06 – 0.25	0.2 – 1.0
			M	1	MC7125	MM	125 – 175	0.08 – 0.30	0.3 – 2.0
			M	2	MC7125	MV	125 – 175	0.08 – 0.30	0.3 – 2.0
			M	3	MC7115	MM	135 – 215	0.08 – 0.30	0.3 – 2.0
			F	1	MC7125	FM	150 – 210	0.04 – 0.20	0.2 – 0.9
			L	1	MC7125	LM	150 – 210	0.06 – 0.25	0.2 – 1.0
			L	2	MP7135	LM	115 – 145	0.06 – 0.25	0.2 – 1.0
			M	1	MC7125	MM	125 – 175	0.08 – 0.30	0.3 – 2.0
			M	2	MC7125	MV	125 – 175	0.08 – 0.30	0.3 – 2.0
			F	1	MP7135	FM	115 – 145	0.04 – 0.20	0.2 – 0.9
			L	1	MP7135	LM	115 – 145	0.06 – 0.25	0.2 – 1.0
			M	1	MP7135	MM	95 – 120	0.08 – 0.30	0.3 – 2.0
			M	2	MP7135	MV	95 – 120	0.08 – 0.30	0.3 – 2.0

5/8

5/8

1. Recommended cutting conditions for 5° / 7° / 11° positive inserts are provided as a guideline only.
Verify the recommended conditions for each boring bar as cutting conditions for internal machining will vary depending on the length of overhang.

MC/MP7100 SERIES – 7° POSITIVE INSERTS (FOR EXTERNAL TURNING)

Material	Hardness	Cutting mode	F L M R H	Priority	Grade		Vc	f	ap
Ferritic and martensitic stainless steel	>200 HB		F	1	MC7125	FM	125 – 175	0.04 – 0.20	0.2 – 0.9
			F	2	MC7115	FM	135 – 215	0.04 – 0.20	0.2 – 0.9
			L	1	MC7125	LM	125 – 175	0.06 – 0.25	0.2 – 1.0
			L	2	MC7115	LM	135 – 215	0.06 – 0.25	0.2 – 1.0
			M	1	MC7125	MM	105 – 145	0.08 – 0.30	0.3 – 2.0
			M	2	MC7125	MV	105 – 145	0.08 – 0.30	0.3 – 2.0
			M	3	MC7115	MM	110 – 180	0.08 – 0.30	0.3 – 2.0
			F	1	MC7125	FM	125 – 175	0.04 – 0.20	0.2 – 0.9
			L	1	MC7125	LM	125 – 175	0.06 – 0.25	0.2 – 1.0
			L	2	MP7135	LM	95 – 120	0.06 – 0.25	0.2 – 1.0
			M	1	MC7125	MM	105 – 145	0.08 – 0.30	0.3 – 2.0
			M	2	MC7125	MV	105 – 145	0.08 – 0.30	0.3 – 2.0
			F	1	MP7135	FM	95 – 120	0.04 – 0.20	0.2 – 0.9
			L	1	MP7135	LM	95 – 120	0.06 – 0.25	0.2 – 1.0
			M	1	MP7135	MM	80 – 100	0.08 – 0.30	0.3 – 2.0
			M	2	MP7135	MV	80 – 100	0.08 – 0.30	0.3 – 2.0
Two-phase stainless steel	<280 HB		F	1	MP7135	FM	75 – 100	0.04 – 0.20	0.2 – 0.9
			L	1	MP7135	LM	75 – 100	0.06 – 0.25	0.2 – 1.0
			L	2	MC7125	LM	100 – 140	0.06 – 0.25	0.2 – 1.0
			L	3	MC7115	LM	110 – 175	0.06 – 0.25	0.2 – 1.0
			M	1	MP7135	MM	65 – 80	0.08 – 0.30	0.3 – 2.0
			M	2	MC7125	MM	85 – 115	0.08 – 0.30	0.3 – 2.0
			M	3	MC7125	MV	85 – 115	0.08 – 0.30	0.3 – 2.0
			M	4	MC7115	MM	90 – 145	0.08 – 0.30	0.3 – 2.0
			F	1	MC7125	FM	100 – 140	0.04 – 0.20	0.2 – 0.9
			L	1	MC7125	LM	100 – 140	0.06 – 0.25	0.2 – 1.0
			M	1	MC7125	MM	85 – 115	0.08 – 0.30	0.3 – 2.0
			M	2	MC7125	MV	85 – 115	0.08 – 0.30	0.3 – 2.0
			F	1	MP7135	FM	75 – 100	0.04 – 0.20	0.2 – 0.9
			L	1	MP7135	LM	75 – 100	0.06 – 0.25	0.2 – 1.0
			M	1	MP7135	MM	65 – 80	0.08 – 0.30	0.3 – 2.0
			M	2	MP7135	MV	65 – 80	0.08 – 0.30	0.3 – 2.0
Precipitation-hardening stainless steel	450 HB		F	1	MC7115	FM	95 – 140	0.04 – 0.20	0.2 – 0.9
			L	1	MC7115	LM	95 – 140	0.06 – 0.20	0.2 – 1.0
			L	2	MC7125	LM	85 – 105	0.06 – 0.20	0.2 – 1.0
			M	1	MC7115	MM	80 – 120	0.08 – 0.25	0.3 – 2.0
			M	2	MC7125	MM	70 – 85	0.08 – 0.25	0.3 – 2.0
			F	1	MC7125	FM	85 – 105	0.04 – 0.20	0.2 – 0.9
			F	2	MP7135	FM	60 – 85	0.04 – 0.20	0.2 – 0.9
			L	1	MC7125	LM	85 – 105	0.06 – 0.20	0.2 – 1.0
			L	2	MP7135	LM	60 – 85	0.06 – 0.20	0.2 – 1.0
			M	1	MC7125	MM	70 – 85	0.08 – 0.25	0.3 – 2.0
			M	2	MC7125	MV	70 – 85	0.08 – 0.30	0.3 – 2.0
			M	3	MP7135	MM	50 – 70	0.08 – 0.25	0.3 – 2.0
			F	1	MP7135	FM	60 – 85	0.04 – 0.20	0.2 – 0.9
			L	1	MP7135	LM	60 – 85	0.06 – 0.20	0.2 – 1.0
			M	1	MP7135	MM	50 – 70	0.08 – 0.25	0.3 – 2.0
			M	2	MP7135	MV	50 – 70	0.08 – 0.30	0.3 – 2.0

6/8

6/8

1. Recommended cutting conditions for 5° / 7° / 11° positive inserts are provided as a guideline only.
Verify the recommended conditions for each boring bar as cutting conditions for internal machining will vary depending on the length of overhang.

MC/MP7100 SERIES – 11° POSITIVE INSERTS (FOR EXTERNAL TURNING)

Material	Hardness	Cutting mode	F L M R H					Priority	Grade		Vc	f	ap
Austenitic stainless steel	<200 HB		L	1	MC7125	LM	150 – 210	0.06 – 0.25	0.2 – 1.0				
			L	2	MC7115	LM	160 – 255	0.06 – 0.25	0.2 – 1.0				
			M	1	MC7125	MM	125 – 175	0.08 – 0.30	0.3 – 2.0				
			M	2	MC7115	MM	135 – 215	0.08 – 0.30	0.3 – 2.0				
			L	1	MC7125	LM	150 – 210	0.06 – 0.25	0.2 – 1.0				
			M	1	MC7125	MM	125 – 175	0.08 – 0.30	0.3 – 2.0				
			M	2	MC7125	MV	125 – 175	0.08 – 0.30	0.3 – 2.0				
			L	1	MP7135	LM	115 – 145	0.06 – 0.25	0.2 – 1.0				
			M	1	MP7135	MM	95 – 120	0.08 – 0.30	0.3 – 2.0				
			M	2	MP7135	MV	95 – 120	0.08 – 0.30	0.3 – 2.0				
	200 HB		L	1	MC7125	LM	125 – 175	0.06 – 0.25	0.2 – 1.0				
			L	2	MC7115	LM	135 – 215	0.06 – 0.25	0.2 – 1.0				
			M	1	MC7125	MM	105 – 145	0.08 – 0.30	0.3 – 2.0				
			M	2	MC7125	MV	105 – 145	0.08 – 0.30	0.3 – 2.0				
			M	3	MC7115	MM	110 – 180	0.08 – 0.30	0.3 – 2.0				
			L	1	MC7125	LM	125 – 175	0.06 – 0.25	0.2 – 1.0				
			M	1	MC7125	MM	105 – 145	0.08 – 0.30	0.3 – 2.0				
			M	2	MC7125	MV	105 – 145	0.08 – 0.30	0.3 – 2.0				
			L	1	MP7135	LM	95 – 120	0.06 – 0.25	0.2 – 1.0				
			M	1	MP7135	MM	80 – 100	0.08 – 0.30	0.3 – 2.0				
			M	2	MP7135	MV	80 – 100	0.08 – 0.30	0.3 – 2.0				
		Ferritic and martensitic stainless steel	<200 HB		L	1	MC7125	LM	150 – 210	0.06 – 0.25	0.2 – 1.0		
	L			2	MC7115	LM	160 – 255	0.06 – 0.25	0.2 – 1.0				
	M			1	MC7125	MM	125 – 175	0.08 – 0.30	0.3 – 2.0				
	M			2	MC7125	MV	125 – 175	0.08 – 0.30	0.3 – 2.0				
	M			3	MC7115	MM	135 – 215	0.08 – 0.30	0.3 – 2.0				
	L			1	MC7125	LM	150 – 210	0.06 – 0.25	0.2 – 1.0				
	M			1	MC7125	MM	125 – 175	0.08 – 0.30	0.3 – 2.0				
	M			2	MC7125	MV	125 – 175	0.08 – 0.30	0.3 – 2.0				
	L			1	MP7135	LM	115 – 145	0.06 – 0.25	0.2 – 1.0				
	M			1	MP7135	MM	95 – 120	0.08 – 0.30	0.3 – 2.0				
	M			2	MP7135	MV	95 – 120	0.08 – 0.30	0.3 – 2.0				
>200 HB				L	1	MC7125	LM	125 – 175	0.06 – 0.25	0.2 – 1.0			
			L	2	MC7115	LM	135 – 215	0.06 – 0.25	0.2 – 1.0				
			M	1	MC7125	MM	105 – 145	0.08 – 0.30	0.3 – 2.0				
			M	2	MC7125	MV	105 – 145	0.08 – 0.30	0.3 – 2.0				
			M	3	MC7115	MM	110 – 180	0.08 – 0.30	0.3 – 2.0				
			L	1	MC7125	LM	125 – 175	0.06 – 0.25	0.2 – 1.0				
			M	1	MC7125	MM	105 – 145	0.08 – 0.30	0.3 – 2.0				
			L	1	MP7135	LM	95 – 120	0.06 – 0.25	0.2 – 1.0				
			M	1	MP7135	MM	80 – 100	0.08 – 0.30	0.3 – 2.0				
			M	2	MP7135	MV	80 – 100	0.08 – 0.30	0.3 – 2.0				

7/8

7/8

1. Recommended cutting conditions for 5° / 7° / 11° positive inserts are provided as a guideline only.
Verify the recommended conditions for each boring bar as cutting conditions for internal machining will vary depending on the length of overhang.

MC/MP7100 SERIES – 11° POSITIVE INSERTS (FOR EXTERNAL TURNING)

Material	Hardness	Cutting mode				Priority	Grade		Vc	f	ap
M	Two-phase stainless steel	<280 HB		L	1	MC7125	LM	100 – 140	0.06 – 0.25	0.2 – 1.0	
				L	2	MC7115	LM	110 – 175	0.06 – 0.25	0.2 – 1.0	
				M	1	MC7125	MM	85 – 115	0.08 – 0.30	0.3 – 2.0	
				M	2	MC7125	MV	85 – 115	0.08 – 0.30	0.3 – 2.0	
				M	3	MC7115	MM	90 – 145	0.08 – 0.30	0.3 – 2.0	
				L	1	MP7135	LM	75 – 100	0.06 – 0.25	0.2 – 1.0	
				L	2	MC7125	LM	100 – 140	0.06 – 0.25	0.2 – 1.0	
				M	1	MC7125	MM	85 – 115	0.08 – 0.30	0.3 – 2.0	
				M	2	MC7125	MV	85 – 115	0.08 – 0.30	0.3 – 2.0	
				L	1	MP7135	LM	75 – 100	0.06 – 0.25	0.2 – 1.0	
				M	1	MP7135	MM	65 – 80	0.08 – 0.30	0.3 – 2.0	
				M	2	MP7135	MV	65 – 80	0.08 – 0.30	0.3 – 2.0	
	Precipitation-hardening stainless steel	450 HB		L	1	MC7125	LM	85 – 105	0.06 – 0.20	0.2 – 1.0	
				L	2	MC7115	LM	95 – 140	0.06 – 0.20	0.2 – 1.0	
				M	1	MC7125	MM	70 – 85	0.08 – 0.25	0.3 – 2.0	
				M	2	MC7125	MV	70 – 85	0.08 – 0.30	0.3 – 2.0	
				L	1	MC7125	LM	85 – 105	0.06 – 0.20	0.2 – 1.0	
				M	1	MC7125	MM	70 – 85	0.08 – 0.25	0.3 – 2.0	
				M	2	MC7125	MV	70 – 85	0.08 – 0.30	0.3 – 2.0	
				L	1	MP7135	LM	60 – 85	0.06 – 0.20	0.2 – 1.0	
				M	1	MC7125	MM	70 – 85	0.08 – 0.25	0.3 – 2.0	
				M	2	MC7125	MV	70 – 85	0.08 – 0.30	0.3 – 2.0	

8/8

8/8


1. Recommended cutting conditions for 5° / 7° / 11° positive inserts are provided as a guideline only.
Verify the recommended conditions for each boring bar as cutting conditions for internal machining will vary depending on the length of overhang.

MC/MP7100

APPLICATION EXAMPLES


MC7115: COMPARISON OF WEAR RESISTANCE DURING WET CUTTING

Tool	CNMG120408- 
Material	DIN X5CrNi189
Vc (m/min)	250
f (mm/rev)	0.30
ap (mm)	1.5
Cutting mode	Wet cutting
Results	Tool life doubled

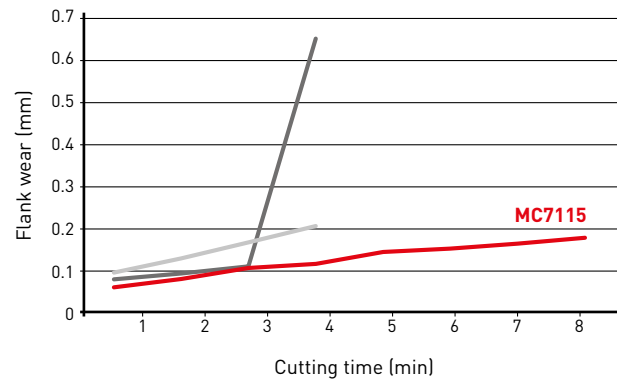


MC7125: COMPARISON OF WEAR RESISTANCE DURING WET CUTTING

Tool	CNMG120408- 
Material	DIN X2CrNiMo1812
Vc (m/min)	250
f (mm/rev)	0.30
ap (mm)	1.5
Cutting mode	Wet cutting
Results	Tool life doubled

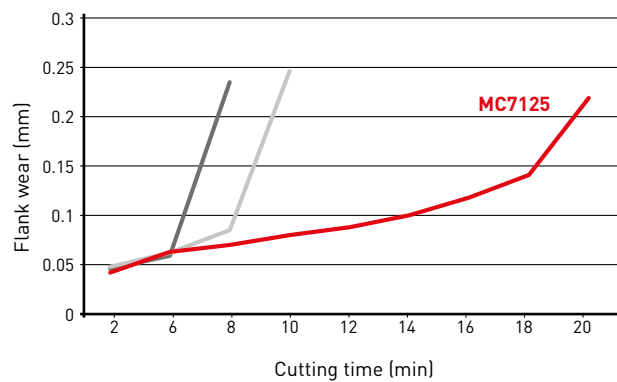

MP7135: INTERMITTENT CUTTING COMPARISON

Tool	CNMG120408- 
Material	DIN X5CrNi189
Vc (m/min)	120
f (mm/rev)	0.25
ap (mm)	2.0 x 2 pass
Cutting mode	Wet cutting
Results	Almost double tool life

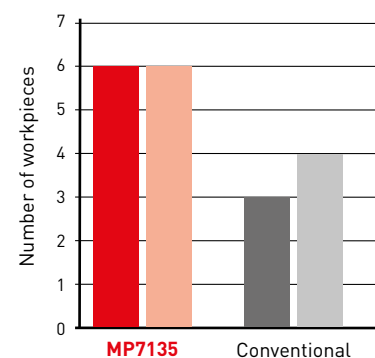

■ : MC/MP7100 ■ A ■ B : Conventional tool

The examples shown are customer's applications, therefore can differ from the recommended conditions.

SYMBOLS

 Recommended cutting conditions	MACHINING TYPE
NEW Completely new products or expansions released in the current Spring or Autumn product launch and are not included in the latest version of the General Catalogue.	 Roughing
NEW Products or expansions that have already been introduced in one of the previous Spring or Autumn product launches but are not included in the latest General Catalogue.	 Medium cutting
APPLICATION	 Light cutting
 Face milling	 Pre-finishing
 Chamfer milling	 Finishing
 Shoulder milling with R	 Fine-finishing
 Face milling close to a wall	TOOL MATERIAL
 Shoulder milling	 Ultra micro grain carbide Ultra micro grain carbide substrate material.
 Side milling	 Cubic boron nitride Mitsubishi Materials' original CBN material.
 Slot milling	 Ceramic For high speed efficient machining of super alloys due to the excellent high temperature strength property.
 Ramping	 High hardness powder metallurgy HSS High hardness powder metallurgy HSS substrate material.
 Pocket milling	 High grade high alloy HSS High grade high alloy HSS substrate material.
 Slot milling with R	 Cobalt high speed steel Cobalt high speed steel substrate material.
 Copy milling	 High speed steel High speed steel substrate material.
 T-Slot milling	

SYMBOLS

COATING



SMART MIRACLE coating

New smooth and dense coating technology for high efficiency milling of difficult to cut materials.



CRN coating

Newly developed CrN coating for Copper Electrodes machining.



Violet coating

Increased tool life of 2-3 times more than TiN coated products.



DP coating

New generation coating suitable for a wide range of materials.



MIRACLE coating

The original Miracle (Al,Ti)N coating. Also suitable for dry cutting.



[Al, Ti]N coating

[Al,Ti]N highly versatile application range.



[Al,Ti,Cr]N multi-layer coating

For carbon, alloy and hardened steels.



IMPACT MIRACLE coating

Single phase nano crystal coating technology has higher film hardness and heat resistance.



MIRACLE coating

The original MIRACLE (Al,Ti)N coating. Also suitable for dry cutting.



VFR coating

The [AlCrSi]N/[AlTiSi]N PVD multilayer coating is ideal for machining of extremely hard materials up to 70 HRC.



DLC coating

Hardness similar to CVD diamond coating achieved with high adhesion strength.



Diamond coating

Suitable for CFRP and CFRP-aluminium materials.



Diamond coating

Suitable for graphite machining.



Diamond coating

The original CVD diamond coating.



CVD Diamond coating

Unique multi-layer micro-grain diamond crystal control technology drastically improves wear resistance and smoothness.

CUTTING EDGE PROPERTIES



Sharp corner edge

Indicates the end mill has a sharp corner edge.



Gash land

Indicates the end mill cutting edge has a protective chamfer.



Rake angle



Helix angle

Indicates the helix angle of the end mill.



Point angle

Indicates the drill point angle.



Roughing flute geometry



Variable helix



Rounded gash



Corner angle

WEB THINNING



X type point geometry

X web thinning used at the drill point.



XR type point geometry

XR web thinning used at the drill point.



S type point geometry

Easy cutting geometry.



N type point geometry

Effective when the point web is thick.



Chipbreaker

SYMBOLS

TOLERANCES



Tolerance of taper angle
Indicates the tolerance of the taper angle.



R tolerance
Indicates the radial tolerance of a ball nose end mill.



R tolerance
Indicates the radial tolerance of the corner radius.



R tolerance
Indicates the radial tolerance of a cutter with a corner radius.



Outside diameter tolerance
Indicates the diameter tolerance of the end mill.



Peak tolerance
Indicates the tolerance for the end diameter.



Shank diameter tolerance



Shank diameter tolerance



Drill tolerance / diameter

COOLANT HOLES



External coolant



Internal coolant



Internal coolant



Centered, internal coolant hole



Radial, internal coolant holes



Internal coolant holes



Internal coolant holes

MEMO

EUROPEAN SALES COMPANIES

GERMANY

MITSUBISHI MATERIALS TOOLS EUROPE GMBH
Comeniusstr. 2 . 40670 Meerbusch
Phone +49 2159 91890 . Fax +49 2159 918966
Email admin@mmchg.de

UK Office

MMC HARDMETAL UK LTD
1 Centurion Court, Centurion Way
Tamworth, B77 5PN
Phone +44 1827 312312
Email sales@mitsubishicarbide.co.uk

UK Deliveries / Returns

Unit 4 B5K Business Park, Quartz Close
Tamworth, B77 4GR

SPAIN

MITSUBISHI MATERIALS ESPAÑA, S.A.
Calle Emperador 2 . 46136 Museros / Valencia
Phone +34 96 1441711
Email comercial@mmevalencia.es

FRANCE

MMC METAL FRANCE S.A.R.L.
6, Rue Jacques Monod . 91400 Orsay
Phone +33 1 69 35 53 53 . Fax +33 1 69 35 53 50
Email mmfsales@mmc-metal-france.fr

POLAND

MMC HARDMETAL POLAND SP. Z O.O.
Al. Armii Krajowej 61 . 50-541 Wrocław
Phone +48 71335 1620 . Fax +48 71335 1621
Email sales@mitsubishicarbide.com.pl

ITALY

MMC ITALIA S.R.L.
Viale Certosa 144 . 20156 Milano
Phone +39 0293 77031 . Fax +39 0293 589093
Email info@mmc-italia.it

TURKEY

MITSUBISHI MATERIALS TOOLS EUROPE GMBH ALMANYA İZMİR MERKEZ ŞUBESİ
Adalet Mahallesi Anadolu Caddesi No: 41-1 . 15001 35530 Bayraklı / İzmir
Phone +90 232 5015000 . Fax +90 232 5015007
Email info@mmchg.com.tr

www.mmc-carbide.com

DISTRIBUTED BY:

┌

┐

└

┘