

415SD

FIRST CHOICE FOR HIGH-FEED MACHINING OF
TITANIUM ALLOYS



*M*plus...


MP1220 / MP1230 / MP1240

MULTI-LAYER PVD COATING FOR MILLING

ONE INSERT SERIES TO SOLVE ALL PROBLEMS WHEN MACHINING STEELS, STAINLESS STEELS, HEAT RESISTANT AND TITANIUM ALLOYS.


GENE-TENAX COATING

By controlling the coating structure at the nano level, damage to the coating has been vastly reduced compared to conventional lamination. By successfully laminating multiple films, simultaneous strengthening of heat, wear and welding resistance is achieved. Additionally the coating is now much less prone to cracking and with the increased adhesive strength, the most stable grade for milling has been created.

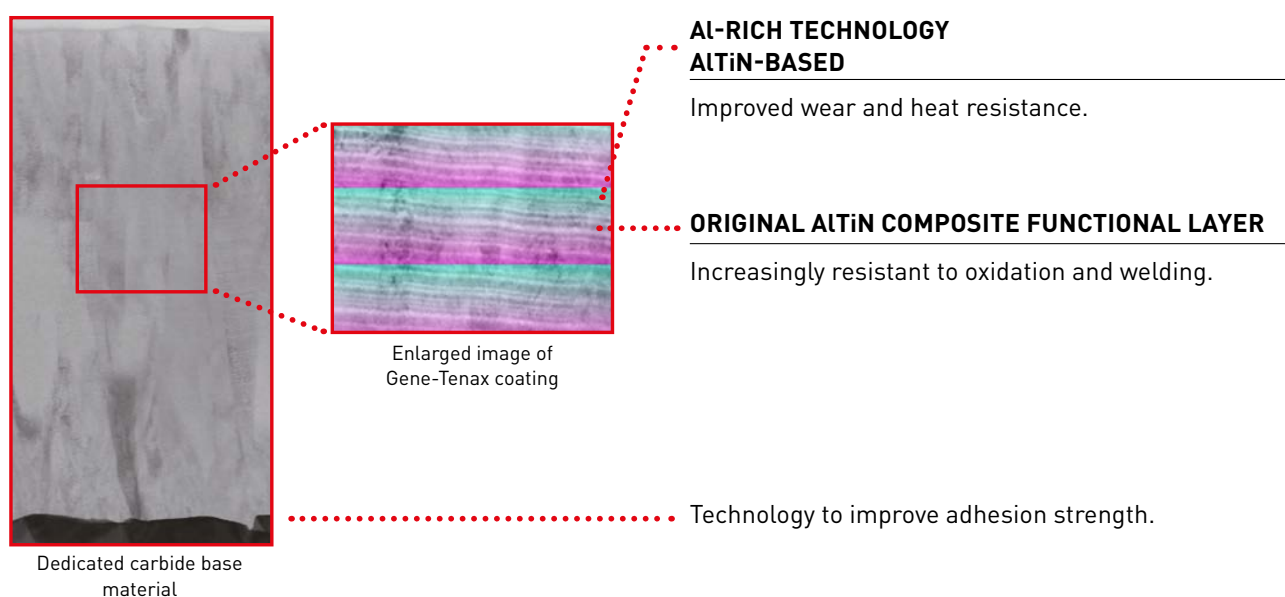

ACHIEVES TOUGHNESS FOR A WIDE RANGE OF WORK MATERIALS

STEEL MACHINING DAMAGE

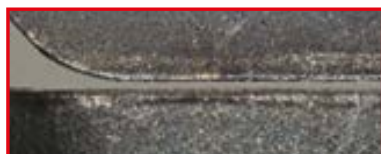


Cutting edge that is resistant to wear when machining steel

STAINLESS STEEL MACHINING DAMAGE



Cutting edge that is less susceptible to notching when machining stainless steel

HEAT RESISTANT AND TITANIUM ALLOYS MACHINING DAMAGE

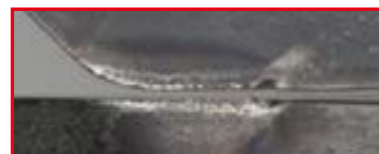

Cutting edge that is resistant to chipping when machining heat resistant and titanium alloys



Thermal cracking



Notching




Chipped cutting edge

NEW MULTILAYER TECHNOLOGY


The adoption of a new multi-layer technology has succeeded in suppressing crack propagation and dramatically improved fracture resistance when compared to conventional technology.

MP1200 SERIES MULTI-LAYER TECHNOLOGY

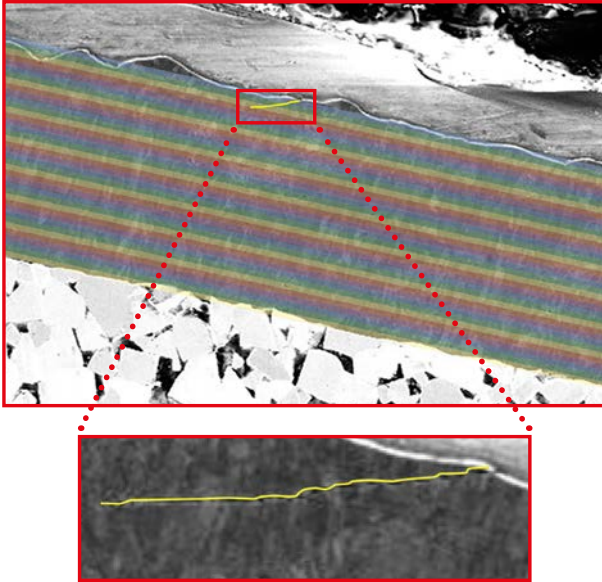

Prevents cracks


CONVENTIONAL LAYER TECHNOLOGY

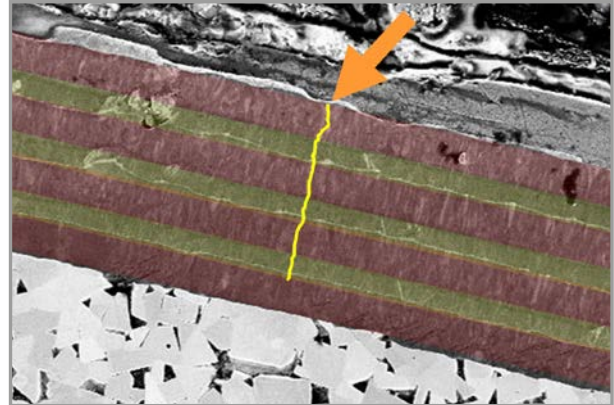

MULTI-GRADE SYSTEM

Using simulation technology, precise analysis of the cutting edge load and temperature when machining different workpiece materials was carried out. This led to the creation of different substrates for three different grades and ensures optimal performance for each type of workpiece material. Ensuring the best performance over a wide range of applications.


MP1220



MP1230



MP1240



2µm

SELECTION GUIDELINES

Steel, Carbon steel

Stainless steel

**Titanium alloys,
Heat resistant alloys**



- Hard grade
- Stable cutting
- Emphasis on wear resistance and mechanical properties

- Tough grade
- Unstable cutting
- Emphasis on fracture resistance and thermal properties

415SD

FOR HIGH-FEED EFFICIENT MACHINING



HIGH-FEED MILLING CUTTER CONCEPT FOR STABILITY AND HIGH PERFORMANCE

- Unevenly spaced cutting edges reduce vibrations, especially in long overhang applications.
- Fine and extra fine pitch types enable a highly efficient cutting performance.
- Carefully selected steel for the tool body is capable of safely absorbing machining forces. In addition, the nickel coating increases wear and corrosion protection.
- The insert location in the holder combined with the ideal geometry and a precisely positioned coolant outlet achieves maximum stability and machining performance.

CUTTING PERFORMANCE

The approach angle of 15° achieves an APMX of 2 mm, which enables a high removal rate but with low radial forces.

TARGETED APPLICATIONS

The use of different diameters and the precise positioning of the coolant nozzles enables perfect chip removal as well as reducing and dissipating the high temperatures that occur at the cutting edge.

SAFE, PRECISE AND RELIABLE

Exact positioning, secure insert clamping with large contact surfaces offers the possibility of high-performance and efficient high-feed machining of stainless steels and heat resistant materials.



415SD

INSERTS FOR HIGH-FEED EFFICIENT MACHINING

THE PVD-COATED, HIGH-PERFORMANCE GRADE MP9130 FOCUSES ON TITANIUM MACHINING

- High-feed face milling including radial, plunge and ramping operations.
- Ideal for machining components that require a long overhang.
- Highly suitable for low power machines and low rigidity component clamping.



L-BREAKER

Ideal for applications that require low cutting resistance.



M-BREAKER

First recommendation - ideal combination of cutting edge stability and low cutting resistance.



R-BREAKER

High cutting edge stability, for heavy interrupted machining or difficult cutting conditions.



Highest productivity even when applications require low cutting resistance.

- Low power consumption.
- Designed to achieve low radial cutting forces.
- Process reliability and long tool life, especially when machining difficult-to-cut materials.
- Stable and robust 4-edge insert for efficient, high-feed milling.

415SD

HIGH-FEED CUTTER




415SD

GAMP: 9°


GAMF: 5° – 6°

1

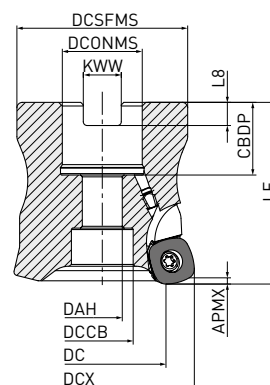

Right hand tool holder only.

DCX	Set bolt	Geometry
Ø 50, Ø 52	HSC10035	1
Ø 63, Ø 66	HSC12035	



ARBOR TYPE

Order number	Stock	APMX	DC	DCONMS	DCX	LF	RMPX	WT	ZEFP	Type	
415SD-050A04AR-E	●	2	33.4	22	50	50	3°	0.4	4	●	1
415SD-050A05AR-E	●	2	33.4	22	50	50	3°	0.4	5	●	1
415SD-052A04AR-E	●	2	35.4	22	52	50	3°	0.4	4	●	1
415SD-052A06AR-E	●	2	35.4	22	52	50	3°	0.4	6	●	1
415SD-063X05AR-E	●	2	46.5	27	63	50	2°	0.7	5	●	1
415SD-063X07AR-E	●	2	46.5	27	63	50	2°	0.7	7	●	1
415SD-066X05AR-E	●	2	49.4	27	66	50	1.9°	0.7	5	●	1
415SD-066X07AR-E	●	2	49.4	27	66	50	1.9°	0.7	7	●	1

SDMT12

1/1

1. Please refer to page 9, for maximum depth of cut (APMX).



415SD




HIGH-FEED CUTTER

MOUNTING DIMENSIONS

Order number	CBDP	DAH	DCCB	DCONMS	DCSFMS	DCX	KWW	L8	Type
415SD-050A04AR-E	20	11	17	22	47	50	10.4	6.3	1
415SD-050A05AR-E	20	11	17	22	47	50	10.4	6.3	1
415SD-052A04AR-E	20	11	17	22	47	52	10.4	6.3	1
415SD-052A06AR-E	20	11	17	22	47	52	10.4	6.3	1
415SD-063X05AR-E	22	13	19	27	60	63	12.4	7.0	1
415SD-063X07AR-E	22	13	19	27	60	63	12.4	7.0	1
415SD-066X05AR-E	22	13	19	27	60	66	12.4	7.0	1
415SD-066X07AR-E	22	13	19	27	60	66	12.4	7.0	1

1/1

INSERTS

Order number	Class	NEW MP1230	NEW MP1240	MP9130	MV1020	MV1030	IC	S	RE	Shape
SDMT125530ZEN-L	L	●	●	●	●	●	12.25	5.56	3.0	
SDMT125530ZEN-M	M	●	●	●	●	●	12.25	5.56	3.0	
SDMT125530ZSN-R	R	●	●	●	●	●	12.25	5.56	3.0	

1/1

415SD



HIGH-FEED CUTTER

SPARE PARTS

Tool holder					
	Clamp screw	Flag wrench	Coolant nozzle	Standard L wrench	Anti-seize lubricant
415SD	TPS43	TIP15W-E	HSD04004H12	HKY20R	MK1KS

1. Clamp torque (N • m): TPS43 = 3.5

COOLANT NOZZLES ARE AVAILABLE WITH VARYING DIAMETERS FOR ADJUSTING COOLANT PRESSURE

← Standard →				
	≤ 1 Mpa (≤ 20 l/min.)	≥ 3 Mpa (≥ 25 l/min.)	≥ 5 Mpa (≥ 30 l/min.)	≥ 7 Mpa (≥ 50 l/min.)
Nozzle Dia.	Ø 0.6 mm	Ø 0.8 mm	Ø 1.2 mm	Ø 1.6 mm
Order number	HSD04004H06	HSD04004H08	HSD04004H12	HSD04004H16

415SD

RECOMMENDED CUTTING CONDITIONS

CORRECTION FACTOR BY OVERHANG LENGTH

	DCX	Overhang length	Adjustment value		
			Vc	ap	fz
Arbor type	50 – 66	<2.5xDCX	100%	100%	100%
		3.0xDCX	85%	100%	90%
		4.0xDCX	80%	80%	80%
		5.0xDCX	75%	75%	60%
		6.0xDCX	70%	70%	40%

CUTTING SPEED/WET CUTTING

Material	Properties	Cutting conditions	Grade	APMX	Vc		
					ae ≤ 0.5 DC	ae ≤ 0.75 DC	ae = DC
S Titanium alloy	—	● ● ✖	MP9130	≤ 1	55 (40 – 70)	50 (35 – 65)	45 (30 – 60)
			MP1230	≤ 1	55 (40 – 70)	50 (35 – 65)	45 (30 – 60)
			MP1240	≤ 1	55 (40 – 70)	50 (35 – 65)	45 (30 – 60)
			MP9130	≤ 2	55 (40 – 70)	50 (35 – 65)	45 (30 – 60)
			MP1230	≤ 2	55 (40 – 70)	50 (35 – 65)	45 (30 – 60)
			MP1240	≤ 2	55 (40 – 70)	50 (35 – 65)	45 (30 – 60)

1/1

NEW

CUTTING SPEED/DRY CUTTING

Material		Properties	Cutting conditions	Grade	APMX	Vc		
						ae ≤ 0.5 DC	ae ≤ 0.75 DC	ae = DC
P	Mild steel	≤ 180 HB	  	MV1020	≤ 2	220 (170 – 270)	220 (170 – 270)	220 (170 – 270)
				MV1030	≤ 2	140 (80 – 200)	140 (80 – 200)	140 (80 – 200)
				MP1230	≤ 2	140 (80 – 200)	140 (80 – 200)	140 (80 – 200)
	Carbon steel, Alloy steel	180 – 280 HB	  	MV1020	≤ 2	200 (150 – 250)	200 (150 – 250)	200 (150 – 250)
				MV1030	≤ 2	120 (60 – 180)	120 (60 – 180)	120 (60 – 180)
				MP1230	≤ 2	120 (60 – 180)	120 (60 – 180)	120 (60 – 180)
		280 – 350 HB		MV1020	≤ 2	150 (100 – 200)	150 (100 – 200)	150 (100 – 200)
				MV1030	≤ 2	90 (30 – 150)	90 (30 – 150)	90 (30 – 150)
				MP1230	≤ 2	90 (30 – 150)	90 (30 – 150)	90 (30 – 150)
				K	Ductile cast iron	  	MV1020	≤ 2
MV1030	≤ 2	140 (80 – 200)	140 (80 – 200)				140 (80 – 200)	
MP1230	≤ 2	140 (80 – 200)	140 (80 – 200)				140 (80 – 200)	
MV1020	≤ 2	180 (130 – 230)	180 (130 – 230)				180 (130 – 230)	
MV1030	≤ 2	140 (80 – 200)	140 (80 – 200)				140 (80 – 200)	
MP1230	≤ 2	140 (80 – 200)	140 (80 – 200)				140 (80 – 200)	

1/1

1/1

415SD

RECOMMENDED CUTTING CONDITIONS

DEPTH OF CUT/FEED PER TOOTH

Material	Properties	Cutting conditions	Coolant	Grade	ae ≤ 0.5 DC			ae ≤ 0.75 DC			ae = DC		
						ap	fz		ap	fz		ap	fz
P	Mild steel	≤ 180 HB		MV1020	L	≤ 1	0.9 [0.4 – 1.2]	L	≤ 1	0.8 [0.4 – 1.1]	L	≤ 1	0.8 [0.4 – 1.0]
				MV1030	L	≤ 1	0.9 [0.4 – 1.2]	L	≤ 1	0.8 [0.4 – 1.1]	L	≤ 1	0.8 [0.4 – 1.0]
				MV1020	L	≤ 2	0.8 [0.4 – 1.2]	L	≤ 2	0.7 [0.4 – 1.1]	L	≤ 2	0.7 [0.4 – 1.0]
				MV1030	L	≤ 2	0.8 [0.4 – 1.2]	L	≤ 2	0.7 [0.4 – 1.1]	L	≤ 2	0.7 [0.4 – 1.0]
				MV1020	L	≤ 1	—	L	≤ 1	—	L	≤ 1	—
				MV1030	L	≤ 1	—	L	≤ 1	—	L	≤ 1	—
				MV1020	L	≤ 2	—	L	≤ 2	—	L	≤ 2	—
				MV1030	L	≤ 2	—	L	≤ 2	—	L	≤ 2	—
				MV1020	M	≤ 1	1.2 [0.4 – 1.8]	M	≤ 1	1.1 [0.4 – 1.6]	M	≤ 1	1.1 [0.4 – 1.6]
				MV1030	M	≤ 1	1.2 [0.4 – 1.8]	M	≤ 1	1.1 [0.4 – 1.6]	M	≤ 1	1.1 [0.4 – 1.6]
				MV1020	M	≤ 2	1.1 [0.4 – 1.8]	M	≤ 2	1.0 [0.4 – 1.6]	M	≤ 2	1.0 [0.4 – 1.6]
				MV1030	M	≤ 2	1.1 [0.4 – 1.8]	M	≤ 2	1.0 [0.4 – 1.6]	M	≤ 2	1.0 [0.4 – 1.6]
				MV1020	M	≤ 1	1.0 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]	M	≤ 1	1.0 [0.4 – 1.5]
				MV1030	M	≤ 1	1.0 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]	M	≤ 1	1.0 [0.4 – 1.5]
				MV1020	M	≤ 2	0.9 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]	M	≤ 2	0.9 [0.4 – 1.5]
				MV1030	M	≤ 2	0.9 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]	M	≤ 2	0.9 [0.4 – 1.5]
				MV1020	M	≤ 1	1.0 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]	M	≤ 1	1.0 [0.4 – 1.5]
				MV1030	M	≤ 1	1.0 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]	M	≤ 1	1.0 [0.4 – 1.5]
				MV1020	M	≤ 2	0.9 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]	M	≤ 2	0.9 [0.4 – 1.5]
				MV1030	M	≤ 2	0.9 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]	M	≤ 2	0.9 [0.4 – 1.5]
				MV1020	R	≤ 1	1.5 [0.4 – 2.1]	R	≤ 1	1.4 [0.4 – 1.9]	R	≤ 1	1.4 [0.4 – 1.9]
				MV1030	R	≤ 1	1.5 [0.4 – 2.1]	R	≤ 1	1.4 [0.4 – 1.9]	R	≤ 1	1.4 [0.4 – 1.9]
				MV1020	R	≤ 2	1.4 [0.4 – 2.1]	R	≤ 2	1.3 [0.4 – 1.9]	R	≤ 2	1.3 [0.4 – 1.9]
				MV1030	R	≤ 2	1.4 [0.4 – 2.1]	R	≤ 2	1.3 [0.4 – 1.9]	R	≤ 2	1.3 [0.4 – 1.9]
				MV1020	R	≤ 1	1.4 [0.4 – 2.0]	R	≤ 1	1.2 [0.4 – 1.8]	R	≤ 1	1.2 [0.4 – 1.7]
				MV1030	R	≤ 1	1.4 [0.4 – 2.0]	R	≤ 1	1.2 [0.4 – 1.8]	R	≤ 1	1.2 [0.4 – 1.7]
				MV1020	R	≤ 2	1.3 [0.4 – 2.0]	R	≤ 2	1.1 [0.4 – 1.8]	R	≤ 2	1.1 [0.4 – 1.7]
				MV1030	R	≤ 2	1.3 [0.4 – 2.0]	R	≤ 2	1.1 [0.4 – 1.8]	R	≤ 2	1.1 [0.4 – 1.7]
				MV1020	R	≤ 1	1.4 [0.4 – 2.0]	R	≤ 1	1.2 [0.4 – 1.8]	R	≤ 1	1.2 [0.4 – 1.7]
				MV1030	R	≤ 1	1.4 [0.4 – 2.0]	R	≤ 1	1.2 [0.4 – 1.8]	R	≤ 1	1.2 [0.4 – 1.7]
				MV1020	R	≤ 2	1.3 [0.4 – 2.0]	R	≤ 2	1.1 [0.4 – 1.8]	R	≤ 2	1.1 [0.4 – 1.7]
				MV1030	R	≤ 2	1.3 [0.4 – 2.0]	R	≤ 2	1.1 [0.4 – 1.8]	R	≤ 2	1.1 [0.4 – 1.7]

1/5

415SD – DEPTH OF CUT / FEED PER TOOTH

Material	Properties	Cutting conditions	Coolant	Grade	ae ≤ 0.5 DC			ae ≤ 0.75 DC			ae = DC			
						ap	fz		ap	fz		ap	fz	
P	Carbon steel, Alloy steel	180 – 280 HB			MV1020	L	≤ 1	0.7 [0.4 – 1.1]	L	≤ 1	0.7 [0.4 – 1.0]	L	≤ 1	0.7 [0.4 – 1.0]
					MV1030	L	≤ 1	0.7 [0.4 – 1.1]	L	≤ 1	0.7 [0.4 – 1.0]	L	≤ 1	0.7 [0.4 – 1.0]
					MV1020	L	≤ 2	—	L	≤ 2	—	L	≤ 2	—
					MV1030	L	≤ 2	—	L	≤ 2	—	L	≤ 2	—
					MV1020	L	≤ 1	—	L	≤ 1	—	L	≤ 1	—
					MV1030	L	≤ 1	—	L	≤ 1	—	L	≤ 1	—
					MV1020	L	≤ 2	—	L	≤ 2	—	L	≤ 2	—
					MV1030	L	≤ 2	—	L	≤ 2	—	L	≤ 2	—
					MV1020	M	≤ 1	1.0 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]	M	≤ 1	1.0 [0.4 – 1.5]
					MV1030	M	≤ 1	1.0 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]	M	≤ 1	1.0 [0.4 – 1.5]
					MV1020	M	≤ 2	0.9 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]	M	≤ 2	0.9 [0.4 – 1.5]
					MV1030	M	≤ 2	0.9 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]	M	≤ 2	0.9 [0.4 – 1.5]
					MV1020	M	≤ 1	0.9 [0.4 – 1.5]	M	≤ 1	0.8 [0.4 – 1.4]	M	≤ 1	0.8 [0.4 – 1.3]
					MV1030	M	≤ 1	0.9 [0.4 – 1.5]	M	≤ 1	0.8 [0.4 – 1.4]	M	≤ 1	0.8 [0.4 – 1.3]
					MV1020	M	≤ 2	0.8 [0.4 – 1.5]	M	≤ 2	0.7 [0.4 – 1.4]	M	≤ 2	0.7 [0.4 – 1.3]
					MV1030	M	≤ 2	0.8 [0.4 – 1.5]	M	≤ 2	0.7 [0.4 – 1.4]	M	≤ 2	0.7 [0.4 – 1.3]
					MV1020	M	≤ 1	0.9 [0.4 – 1.5]	M	≤ 1	0.8 [0.4 – 1.4]	M	≤ 1	0.8 [0.4 – 1.3]
					MV1030	M	≤ 1	0.9 [0.4 – 1.5]	M	≤ 1	0.8 [0.4 – 1.4]	M	≤ 1	0.8 [0.4 – 1.3]
					MV1020	M	≤ 2	0.8 [0.4 – 1.5]	M	≤ 2	0.7 [0.4 – 1.4]	M	≤ 2	0.7 [0.4 – 1.3]
					MV1030	M	≤ 2	0.8 [0.4 – 1.5]	M	≤ 2	0.7 [0.4 – 1.4]	M	≤ 2	0.7 [0.4 – 1.3]
					MV1020	R	≤ 1	1.4 [0.4 – 2.0]	R	≤ 1	1.2 [1.0 – 1.8]	R	≤ 1	1.2 [0.4 – 1.7]
					MV1030	R	≤ 1	1.4 [0.4 – 2.0]	R	≤ 1	1.2 [1.0 – 1.8]	R	≤ 1	1.2 [0.4 – 1.7]
					MV1020	R	≤ 2	1.3 [0.4 – 2.0]	R	≤ 2	1.1 [1.0 – 1.8]	R	≤ 2	1.1 [0.4 – 1.7]
					MV1030	R	≤ 2	1.3 [0.4 – 2.0]	R	≤ 2	1.1 [1.0 – 1.8]	R	≤ 2	1.1 [0.4 – 1.7]
					MV1020	R	≤ 1	1.2 [0.4 – 1.8]	R	≤ 1	1.1 [0.8 – 1.6]	R	≤ 1	1.1 [0.4 – 1.6]
					MV1030	R	≤ 1	1.2 [0.4 – 1.8]	R	≤ 1	1.1 [0.8 – 1.6]	R	≤ 1	1.1 [0.4 – 1.6]
					MV1020	R	≤ 2	1.1 [0.4 – 1.8]	R	≤ 2	1.0 [0.8 – 1.6]	R	≤ 2	1.0 [0.4 – 1.6]
					MV1030	R	≤ 2	1.1 [0.4 – 1.8]	R	≤ 2	1.0 [0.8 – 1.6]	R	≤ 2	1.0 [0.4 – 1.6]
					MV1020	R	≤ 1	1.2 [0.4 – 1.8]	R	≤ 1	1.1 [0.8 – 1.6]	R	≤ 1	1.1 [0.4 – 1.6]
					MV1030	R	≤ 1	1.2 [0.4 – 1.8]	R	≤ 1	1.1 [0.8 – 1.6]	R	≤ 1	1.1 [0.4 – 1.6]
					MV1020	R	≤ 2	1.1 [0.4 – 1.8]	R	≤ 2	1.0 [0.8 – 1.6]	R	≤ 2	1.0 [0.4 – 1.6]
					MV1030	R	≤ 2	1.1 [0.4 – 1.8]	R	≤ 2	1.0 [0.8 – 1.6]	R	≤ 2	1.0 [0.4 – 1.6]

2/5

2/5

415SD – DEPTH OF CUT / FEED PER TOOTH

Material	Properties	Cutting conditions	Coolant	Grade	ae ≤ 0.5 DC				ae ≤ 0.75 DC				ae = DC			
						ap	fz		ap	fz		ap	fz			
P	Carbon steel, Alloy steel	280 – 350 HB			MV1020	L	≤ 1	0.6 [0.4 – 0.9]	L	≤ 1	0.6 [0.4 – 0.8]	L	≤ 1	0.6 [0.4 – 0.8]		
					MV1030	L	≤ 1	0.6 [0.4 – 0.9]	L	≤ 1	0.6 [0.4 – 0.8]	L	≤ 1	0.6 [0.4 – 0.8]		
					MV1020	L	≤ 2	0.5 [0.4 – 0.9]	L	≤ 2	0.5 [0.4 – 0.8]	L	≤ 2	0.5 [0.4 – 0.8]		
					MV1030	L	≤ 2	0.5 [0.4 – 0.9]	L	≤ 2	0.5 [0.4 – 0.8]	L	≤ 2	0.5 [0.4 – 0.8]		
					MV1020	L	≤ 1	—	L	≤ 1	—	L	≤ 1	—		
					MV1030	L	≤ 1	—	L	≤ 1	—	L	≤ 1	—		
					MV1020	L	≤ 2	—	L	≤ 2	—	L	≤ 2	—		
					MV1030	L	≤ 2	—	L	≤ 2	—	L	≤ 2	—		
					MV1020	M	≤ 1	0.9 [0.4 – 1.5]	M	≤ 1	0.8 [0.4 – 1.4]	M	≤ 1	0.8 [0.4 – 1.3]		
					MV1030	M	≤ 1	0.9 [0.4 – 1.5]	M	≤ 1	0.8 [0.4 – 1.4]	M	≤ 1	0.8 [0.4 – 1.3]		
					MV1020	M	≤ 2	0.8 [0.4 – 1.5]	M	≤ 2	0.7 [0.4 – 1.4]	M	≤ 2	0.7 [0.4 – 1.3]		
					MV1030	M	≤ 2	0.8 [0.4 – 1.5]	M	≤ 2	0.7 [0.4 – 1.4]	M	≤ 2	0.7 [0.4 – 1.3]		
					MV1020	M	≤ 1	0.9 [0.4 – 1.5]	M	≤ 1	0.8 [0.4 – 1.4]	M	≤ 1	0.7 [0.4 – 1.2]		
					MV1030	M	≤ 1	0.9 [0.4 – 1.5]	M	≤ 1	0.8 [0.4 – 1.4]	M	≤ 1	0.7 [0.4 – 1.2]		
					MV1020	M	≤ 2	0.8 [0.4 – 1.5]	M	≤ 2	0.7 [0.4 – 1.4]	M	≤ 2	0.6 [0.4 – 1.2]		
					MV1030	M	≤ 2	0.8 [0.4 – 1.5]	M	≤ 2	0.7 [0.4 – 1.4]	M	≤ 2	0.6 [0.4 – 1.2]		
					MV1020	M	≤ 1	0.9 [0.4 – 1.5]	M	≤ 1	0.8 [0.4 – 1.4]	M	≤ 1	0.7 [0.4 – 1.2]		
					MV1030	M	≤ 1	0.9 [0.4 – 1.5]	M	≤ 1	0.8 [0.4 – 1.4]	M	≤ 1	0.7 [0.4 – 1.2]		
					MV1020	M	≤ 2	0.8 [0.4 – 1.5]	M	≤ 2	0.7 [0.4 – 1.4]	M	≤ 2	0.6 [0.4 – 1.2]		
					MV1030	M	≤ 2	0.8 [0.4 – 1.5]	M	≤ 2	0.7 [0.4 – 1.4]	M	≤ 2	0.6 [0.4 – 1.2]		
					MV1020	R	≤ 1	1.2 [0.4 – 1.8]	R	≤ 1	1.1 [0.4 – 1.6]	R	≤ 1	1.1 [0.8 – 1.6]		
					MV1030	R	≤ 1	1.2 [0.4 – 1.8]	R	≤ 1	1.1 [0.4 – 1.6]	R	≤ 1	1.1 [0.8 – 1.6]		
					MV1020	R	≤ 2	1.1 [0.4 – 1.8]	R	≤ 2	1.0 [0.4 – 1.6]	R	≤ 2	1.0 [0.8 – 1.6]		
					MV1030	R	≤ 2	1.1 [0.4 – 1.8]	R	≤ 2	1.0 [0.4 – 1.6]	R	≤ 2	1.0 [0.8 – 1.6]		
					MV1020	R	≤ 1	1.1 [0.4 – 1.8]	R	≤ 1	1.0 [0.4 – 1.6]	R	≤ 1	1.0 [0.4 – 1.5]		
					MV1030	R	≤ 1	1.1 [0.4 – 1.8]	R	≤ 1	1.0 [0.4 – 1.6]	R	≤ 1	1.0 [0.4 – 1.5]		
					MV1020	R	≤ 2	1.0 [0.4 – 1.8]	R	≤ 2	0.9 [0.4 – 1.6]	R	≤ 2	0.9 [0.4 – 1.5]		
					MV1030	R	≤ 2	1.0 [0.4 – 1.8]	R	≤ 2	0.9 [0.4 – 1.6]	R	≤ 2	0.9 [0.4 – 1.5]		
					MV1020	R	≤ 1	1.1 [0.4 – 1.8]	R	≤ 1	1.0 [0.4 – 1.6]	R	≤ 1	1.0 [0.4 – 1.5]		
					MV1030	R	≤ 1	1.1 [0.4 – 1.8]	R	≤ 1	1.0 [0.4 – 1.6]	R	≤ 1	1.0 [0.4 – 1.5]		
					MV1020	R	≤ 2	1.0 [0.4 – 1.8]	R	≤ 2	0.9 [0.4 – 1.6]	R	≤ 2	0.9 [0.4 – 1.5]		
					MV1030	R	≤ 2	1.0 [0.4 – 1.8]	R	≤ 2	0.9 [0.4 – 1.6]	R	≤ 2	0.9 [0.4 – 1.5]		

3/5

415SD – DEPTH OF CUT / FEED PER TOOTH

Material	Properties	Cutting conditions	Coolant	Grade	ae ≤ 0.5 DC				ae ≤ 0.75 DC				ae = DC			
							ap	fz			ap	fz			ap	fz
K	Ductile cast iron	Tensile strength ≤ 350 MPa			MV1020	L	≤ 1	0.9 [0.4 – 1.2]	L	≤ 1	0.8 [0.4 – 1.1]	L	≤ 1	0.8 [0.4 – 1.1]		
					MV1030	L	≤ 1	0.9 [0.4 – 1.2]	L	≤ 1	0.8 [0.4 – 1.1]	L	≤ 1	0.8 [0.4 – 1.1]		
					MV1020	L	≤ 2	0.8 [0.4 – 1.2]	L	≤ 2	0.7 [0.4 – 1.1]	L	≤ 2	0.7 [0.4 – 1.1]		
					MV1030	L	≤ 2	0.8 [0.4 – 1.2]	L	≤ 2	0.7 [0.4 – 1.1]	L	≤ 2	0.7 [0.4 – 1.1]		
					MV1020	L	≤ 1	—	L	≤ 1	—	L	≤ 1	—		
					MV1030	L	≤ 1	—	L	≤ 1	—	L	≤ 1	—		
					MV1020	L	≤ 2	—	L	≤ 2	—	L	≤ 2	—		
					MV1030	L	≤ 2	—	L	≤ 2	—	L	≤ 2	—		
					MV1020	M	≤ 1	1.2 [0.4 – 1.8]	M	≤ 1	1.1 [0.4 – 1.6]	M	≤ 1	1.1 [0.4 – 1.6]		
					MV1030	M	≤ 1	1.2 [0.4 – 1.8]	M	≤ 1	1.1 [0.4 – 1.6]	M	≤ 1	1.1 [0.4 – 1.6]		
					MV1020	M	≤ 2	1.1 [0.4 – 1.8]	M	≤ 2	1.0 [0.4 – 1.6]	M	≤ 2	1.0 [0.4 – 1.6]		
					MV1030	M	≤ 2	1.1 [0.4 – 1.8]	M	≤ 2	1.0 [0.4 – 1.6]	M	≤ 2	1.0 [0.4 – 1.6]		
					MV1020	M	≤ 1	1.1 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]	M	≤ 1	0.9 [0.4 – 1.5]		
					MV1030	M	≤ 1	1.1 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]	M	≤ 1	0.9 [0.4 – 1.5]		
					MV1020	M	≤ 2	1.0 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]	M	≤ 2	0.8 [0.4 – 1.5]		
					MV1030	M	≤ 2	1.0 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]	M	≤ 2	0.8 [0.4 – 1.5]		
					MV1020	M	≤ 1	1.1 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]	M	≤ 1	0.9 [0.4 – 1.5]		
					MV1030	M	≤ 1	1.1 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]	M	≤ 1	0.9 [0.4 – 1.5]		
					MV1020	M	≤ 2	1.0 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]	M	≤ 2	0.8 [0.4 – 1.5]		
					MV1030	M	≤ 2	1.0 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]	M	≤ 2	0.8 [0.4 – 1.5]		
					MV1020	R	≤ 1	1.5 [0.4 – 2.1]	R	≤ 1	1.4 [0.4 – 1.9]	R	≤ 1	1.3 [1.1 – 1.9]		
					MV1030	R	≤ 1	1.5 [0.4 – 2.1]	R	≤ 1	1.4 [0.4 – 1.9]	R	≤ 1	1.3 [1.1 – 1.9]		
					MV1020	R	≤ 2	1.4 [0.4 – 2.1]	R	≤ 2	1.3 [0.4 – 1.9]	R	≤ 2	1.2 [1.1 – 1.9]		
					MV1030	R	≤ 2	1.4 [0.4 – 2.1]	R	≤ 2	1.3 [0.4 – 1.9]	R	≤ 2	1.2 [1.1 – 1.9]		
					MV1020	R	≤ 1	1.4 [1.0 – 2.0]	R	≤ 1	1.2 [0.4 – 1.8]	R	≤ 1	1.2 [0.4 – 1.7]		
					MV1030	R	≤ 1	1.4 [1.0 – 2.0]	R	≤ 1	1.2 [0.4 – 1.8]	R	≤ 1	1.2 [0.4 – 1.7]		
					MV1020	R	≤ 2	1.3 [1.0 – 2.0]	R	≤ 2	1.1 [0.4 – 1.8]	R	≤ 2	1.1 [0.4 – 1.7]		
					MV1030	R	≤ 2	1.3 [1.0 – 2.0]	R	≤ 2	1.1 [0.4 – 1.8]	R	≤ 2	1.1 [0.4 – 1.7]		
					MV1020	R	≤ 1	1.4 [1.0 – 2.0]	R	≤ 1	1.2 [0.4 – 1.8]	R	≤ 1	1.2 [0.4 – 1.7]		
					MV1030	R	≤ 1	1.4 [1.0 – 2.0]	R	≤ 1	1.2 [0.4 – 1.8]	R	≤ 1	1.2 [0.4 – 1.7]		
					MV1020	R	≤ 2	1.3 [1.0 – 2.0]	R	≤ 2	1.1 [0.4 – 1.8]	R	≤ 2	1.1 [0.4 – 1.7]		
					MV1030	R	≤ 2	1.3 [1.0 – 2.0]	R	≤ 2	1.1 [0.4 – 1.8]	R	≤ 2	1.1 [0.4 – 1.7]		

4/5


415SD – DEPTH OF CUT / FEED PER TOOTH

Material	Properties	Cutting conditions	Coolant	Grade	ae ≤ 0.5 DC		ae ≤ 0.75 DC		ae = DC	
					 ap	fz	 ap	fz	 ap	fz
K Ductile cast iron	Tensile strength ≤ 800 MPa	●	✗	MV1020	L	≤ 1 0.9 [0.4 – 1.2]	L	≤ 1 0.8 [0.4 – 1.1]	L	≤ 1 0.8 [0.4 – 1.1]
		●	✗	MV1030	L	≤ 1 0.9 [0.4 – 1.2]	L	≤ 1 0.8 [0.4 – 1.1]	L	≤ 1 0.8 [0.4 – 1.1]
		●	✗	MV1020	L	≤ 2 0.8 [0.4 – 1.2]	L	≤ 2 0.7 [0.4 – 1.1]	L	≤ 2 0.7 [0.4 – 1.1]
		●	✗	MV1030	L	≤ 2 0.8 [0.4 – 1.2]	L	≤ 2 0.7 [0.4 – 1.1]	L	≤ 2 0.7 [0.4 – 1.1]
		●	✗	MV1020	L	≤ 1 —	L	≤ 1 —	L	≤ 1 —
		●	✗	MV1030	L	≤ 1 —	L	≤ 1 —	L	≤ 1 —
		●	✗	MV1020	L	≤ 2 —	L	≤ 2 —	L	≤ 2 —
		●	✗	MV1030	L	≤ 2 —	L	≤ 2 —	L	≤ 2 —
		●	✗	MV1020	M	≤ 1 1.2 [0.4 – 1.8]	M	≤ 1 1.1 [0.4 – 1.6]	M	≤ 1 1.1 [0.4 – 1.6]
		●	✗	MV1030	M	≤ 1 1.2 [0.4 – 1.8]	M	≤ 1 1.1 [0.4 – 1.6]	M	≤ 1 1.1 [0.4 – 1.6]
		●	✗	MV1020	M	≤ 2 1.1 [0.4 – 1.8]	M	≤ 2 1.0 [0.4 – 1.6]	M	≤ 2 1.0 [0.4 – 1.6]
		●	✗	MV1030	M	≤ 2 1.1 [0.4 – 1.8]	M	≤ 2 1.0 [0.4 – 1.6]	M	≤ 2 1.0 [0.4 – 1.6]
		●	✗	MV1020	M	≤ 1 1.1 [0.4 – 1.7]	M	≤ 1 1.0 [0.4 – 1.5]	M	≤ 1 0.9 [0.4 – 1.5]
		●	✗	MV1030	M	≤ 1 1.1 [0.4 – 1.7]	M	≤ 1 1.0 [0.4 – 1.5]	M	≤ 1 0.9 [0.4 – 1.5]
		●	✗	MV1020	M	≤ 2 1.0 [0.4 – 1.7]	M	≤ 2 0.9 [0.4 – 1.5]	M	≤ 2 0.8 [0.4 – 1.5]
		●	✗	MV1030	M	≤ 2 1.0 [0.4 – 1.7]	M	≤ 2 0.9 [0.4 – 1.5]	M	≤ 2 0.8 [0.4 – 1.5]
		✱	✗	MV1020	M	≤ 1 1.1 [0.4 – 1.7]	M	≤ 1 1.0 [0.4 – 1.5]	M	≤ 1 0.9 [0.4 – 1.5]
		✱	✗	MV1030	M	≤ 1 1.1 [0.4 – 1.7]	M	≤ 1 1.0 [0.4 – 1.5]	M	≤ 1 0.9 [0.4 – 1.5]
		✱	✗	MV1020	M	≤ 2 1.0 [0.4 – 1.7]	M	≤ 2 0.9 [0.4 – 1.5]	M	≤ 2 0.8 [0.4 – 1.5]
		✱	✗	MV1030	M	≤ 2 1.0 [0.4 – 1.7]	M	≤ 2 0.9 [0.4 – 1.5]	M	≤ 2 0.8 [0.4 – 1.5]
		●	✗	MV1020	R	≤ 1 1.5 [0.4 – 2.1]	R	≤ 1 1.4 [0.4 – 1.9]	R	≤ 1 1.3 [1.1 – 1.9]
		●	✗	MV1030	R	≤ 1 1.5 [0.4 – 2.1]	R	≤ 1 1.4 [0.4 – 1.9]	R	≤ 1 1.3 [1.1 – 1.9]
		●	✗	MV1020	R	≤ 2 1.4 [0.4 – 2.1]	R	≤ 2 1.3 [0.4 – 1.9]	R	≤ 2 1.2 [1.1 – 1.9]
		●	✗	MV1030	R	≤ 2 1.4 [0.4 – 2.1]	R	≤ 2 1.3 [0.4 – 1.9]	R	≤ 2 1.2 [1.1 – 1.9]
		●	✗	MV1020	R	≤ 1 1.4 [1.0 – 2.0]	R	≤ 1 1.2 [0.4 – 1.8]	R	≤ 1 1.2 [0.4 – 1.7]
		●	✗	MV1030	R	≤ 1 1.4 [1.0 – 2.0]	R	≤ 1 1.2 [0.4 – 1.8]	R	≤ 1 1.2 [0.4 – 1.7]
		●	✗	MV1020	R	≤ 2 1.3 [1.0 – 2.0]	R	≤ 2 1.1 [0.4 – 1.8]	R	≤ 2 1.1 [0.4 – 1.7]
		●	✗	MV1030	R	≤ 2 1.3 [1.0 – 2.0]	R	≤ 2 1.1 [0.4 – 1.8]	R	≤ 2 1.1 [0.4 – 1.7]
		✱	✗	MV1020	R	≤ 1 1.4 [1.0 – 2.0]	R	≤ 1 1.2 [0.4 – 1.8]	R	≤ 1 1.2 [0.4 – 1.7]
		✱	✗	MV1030	R	≤ 1 1.4 [1.0 – 2.0]	R	≤ 1 1.2 [0.4 – 1.8]	R	≤ 1 1.2 [0.4 – 1.7]
		✱	✗	MV1020	R	≤ 2 1.3 [1.0 – 2.0]	R	≤ 2 1.1 [0.4 – 1.8]	R	≤ 2 1.1 [0.4 – 1.7]
		✱	✗	MV1030	R	≤ 2 1.3 [1.0 – 2.0]	R	≤ 2 1.1 [0.4 – 1.8]	R	≤ 2 1.1 [0.4 – 1.7]
S Titanium alloy	—	●	💧	MP9130	L	≤ 1 0.7 [0.5 – 0.9]	L	≤ 1 0.6 [0.4 – 0.7]	L	≤ 1 0.5 [0.3 – 0.6]
		●	💧	MP9130	L	≤ 2 0.6 [0.4 – 0.8]	L	≤ 2 0.5 [0.3 – 0.6]	L	≤ 2 0.4 [0.2 – 0.5]
		●	💧	MP9130	M	≤ 1 0.7 [0.5 – 0.9]	M	≤ 1 0.6 [0.4 – 0.7]	M	≤ 1 0.5 [0.3 – 0.6]
		●	💧	MP9130	M	≤ 2 0.6 [0.4 – 0.8]	M	≤ 2 0.5 [0.3 – 0.6]	M	≤ 2 0.4 [0.2 – 0.5]
		●	💧	MP9130	R	≤ 1 0.8 [0.6 – 1.0]	R	≤ 1 0.7 [0.4 – 0.9]	R	≤ 1 0.6 [0.4 – 0.8]
		●	💧	MP9130	R	≤ 2 0.7 [0.5 – 0.9]	R	≤ 2 0.6 [0.3 – 0.8]	R	≤ 2 0.5 [0.3 – 0.7]
		✱	💧	MP9130	R	≤ 1 0.7 [0.5 – 0.9]	R	≤ 1 0.6 [0.4 – 0.7]	R	≤ 1 0.5 [0.3 – 0.6]
		✱	💧	MP9130	R	≤ 2 0.6 [0.4 – 0.8]	R	≤ 2 0.5 [0.3 – 0.6]	R	≤ 2 0.4 [0.2 – 0.5]


415SD

MAXIMUM CAPACITIES BY MODE

RAMPING

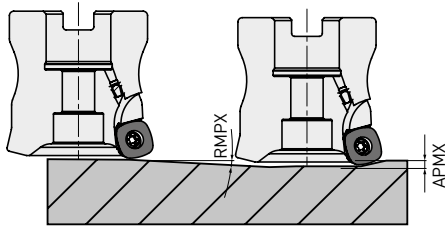

HELICAL DRILLING



- How to derive a locus of the centre of the tool.

$$\varnothing DC = \varnothing DH - DCX$$

Locus of the centre of the tool Desired hole diameter Cutting Diameter Maximum


- For the depth of cut per pass, refer to the cutting conditions above for helical drilling.
- Set the machine spindle revolution so that the tool is rotating and cutting in a down cut direction.

- When ramping and helical cutting, please apply a lower feed (60 % of the calculated feed rate or less).
- The long chips generated can disperse, ensure that adequate safety precautions are taken.

Tool holder type	DCX	DC	APMX	Ramping	Helical drilling	
				RMPX	DH	
					Min.	Max.
ARBOR TYPE						
41SD-050A04AR-E	50	33.4	2	3	84	97
41SD-050A05AR-E	50	33.4	2	3	84	97
41SD-052A04AR-E	52	35.4	2	3	88	101
41SD-052A06AR-E	52	35.4	2	3	88	101
41SD-063A05AR-E	63	46.5	2	2	110	123
41SD-063A07AR-E	63	46.5	2	2	110	123
41SD-066A05AR-E	66	49.4	2	1.9	116	129
41SD-066A07AR-E	66	49.4	2	1.9	116	129

NOTE FOR PROGRAMMING

When using 415SD (Mplus), please programme as an RE = 4.3 radius cutter. The approximate uncut portions for the programme are as follows.

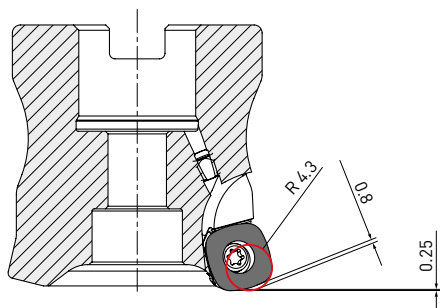

SYMBOLS

 Recommended cutting conditions	MACHINING TYPE
NEW Completely new products or expansions released in the current Spring or Autumn product launch and are not included in the latest version of the General Catalogue.	 Roughing
NEW Products or expansions that have already been introduced in one of the previous Spring or Autumn product launches but are not included in the latest General Catalogue.	 Medium cutting
APPLICATION	 Light cutting
 Face milling	 Pre-finishing
 Chamfer milling	 Finishing
 Shoulder milling with R	 Fine-finishing
 Face milling close to a wall	TOOL MATERIAL
 Shoulder milling	 Ultra micro grain carbide Ultra micro grain carbide substrate material.
 Side milling	 Cubic boron nitride Mitsubishi Materials' original CBN material.
 Slot milling	 Ceramic For high speed efficient machining of super alloys due to the excellent high temperature strength property.
 Ramping	 High hardness powder metallurgy HSS High hardness powder metallurgy HSS substrate material.
 Pocket milling	 High grade high alloy HSS High grade high alloy HSS substrate material.
 Slot milling with R	 Cobalt high speed steel Cobalt high speed steel substrate material.
 Copy milling	 High speed steel High speed steel substrate material.
 T-Slot milling	

SYMBOLS

COATING



SMART MIRACLE coating

New smooth and dense coating technology for high efficiency milling of difficult to cut materials.



CRN coating

Newly developed CrN coating for Copper Electrodes machining.



Violet coating

Increased tool life of 2-3 times more than TiN coated products.



DP coating

New generation coating suitable for a wide range of materials.



MIRACLE coating

The original Miracle (Al,Ti)N coating. Also suitable for dry cutting.



[Al, Ti]N coating

[Al,Ti]N highly versatile application range.



[Al,Ti,Cr]N multi-layer coating

For carbon, alloy and hardened steels.



IMPACT MIRACLE coating

Single phase nano crystal coating technology has higher film hardness and heat resistance.



MIRACLE coating

The original MIRACLE (Al,Ti)N coating. Also suitable for dry cutting.



VFR coating

The [AlCrSi]N/[AlTiSi]N PVD multilayer coating is ideal for machining of extremely hard materials up to 70 HRC.



DLC coating

Hardness similar to CVD diamond coating achieved with high adhesion strength.



Diamond coating

Suitable for CFRP and CFRP-aluminium materials.



Diamond coating

Suitable for graphite machining.



Diamond coating

The original CVD diamond coating.



CVD Diamond coating

Unique multi-layer micro-grain diamond crystal control technology drastically improves wear resistance and smoothness.

CUTTING EDGE PROPERTIES



Sharp corner edge

Indicates the end mill has a sharp corner edge.



Gash land

Indicates the end mill cutting edge has a protective chamfer.



Rake angle



Helix angle

Indicates the helix angle of the end mill.



Point angle

Indicates the drill point angle.



Roughing flute geometry



Variable helix



Rounded gash



Corner angle

WEB THINNING



X type point geometry

X web thinning used at the drill point.



XR type point geometry

XR web thinning used at the drill point.



S type point geometry

Easy cutting geometry.



N type point geometry

Effective when the point web is thick.



Chipbreaker

SYMBOLS

TOLERANCES



Tolerance of taper angle
Indicates the tolerance of the taper angle.



R tolerance
Indicates the radial tolerance of a ball nose end mill.



R tolerance
Indicates the radial tolerance of the corner radius.



R tolerance
Indicates the radial tolerance of a cutter with a corner radius.



Outside diameter tolerance
Indicates the diameter tolerance of the end mill.



Peak tolerance
Indicates the tolerance for the end diameter.



Shank diameter tolerance



Shank diameter tolerance



Drill tolerance / diameter

COOLANT HOLES



External coolant



Internal coolant



Internal coolant



Centered, internal coolant hole



Radial, internal coolant holes



Internal coolant holes



Internal coolant holes

MEMO

EUROPEAN SALES COMPANIES OF MITSUBISHI MATERIALS

GERMANY

MITSUBISHI MATERIALS TOOLS EUROPE GMBH
Comeniusstr. 2 . 40670 Meerbusch
Phone +49 2159 91890 . Fax +49 2159 918966
Email admin@mmchg.de

UK Office

MMC HARDMETAL UK LTD
1 Centurion Court, Centurion Way
Tamworth, B77 5PN
Phone +44 1827 312312
Email sales@mitsubishicarbide.co.uk

UK Deliveries / Returns

Unit 4 B5K Business Park, Quartz Close
Tamworth, B77 4GR

SPAIN

MITSUBISHI MATERIALS ESPAÑA, S.A.
Calle Emperador 2 . 46136 Museros / Valencia
Phone +34 96 1441711
Email comercial@mmevalencia.es

FRANCE

MMC METAL FRANCE S.A.R.L.
6, Rue Jacques Monod . 91400 Orsay
Phone +33 1 69 35 53 53 . Fax +33 1 69 35 53 50
Email mmfsales@mmc-metal-france.fr

POLAND

MMC HARDMETAL POLAND SP. Z O.O.
Al. Armii Krajowej 61 . 50-541 Wrocław
Phone +48 71335 1620 . Fax +48 71335 1621
Email sales@mitsubishicarbide.com.pl

ITALY

MMC ITALIA S.R.L.
Viale Certosa 144 . 20156 Milano
Phone +39 0293 77031 . Fax +39 0293 589093
Email info@mmc-italia.it

TURKEY

MITSUBISHI MATERIALS TOOLS EUROPE GMBH ALMANYA İZMİR MERKEZ ŞUBESİ
Adalet Mahallesi Anadolu Caddesi No: 41-1 . 15001 35530 Bayraklı / İzmir
Phone +90 232 5015000 . Fax +90 232 5015007
Email info@mmchg.com.tr

europe.mmc-carbide.com

DISTRIBUTED BY:

┌

┐

└

┘

Published by:  MITSUBISHI MATERIALS TOOLS EUROPE